

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906588

Luminaire Tested: DFN2DIP-SQ3F0-100D120US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906588
REPORT IS A COMBINATION OF REPORTS P900017 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-100D120US835-FLLFLL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 20520.0 lumens
Efficiency: N/A
Efficacy: 106.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 192.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906588

CATALOG NUMBER: DFN2DIP-SQ3F0-100D120US835-FLLFLL

Luminous Intensity Polar Plot

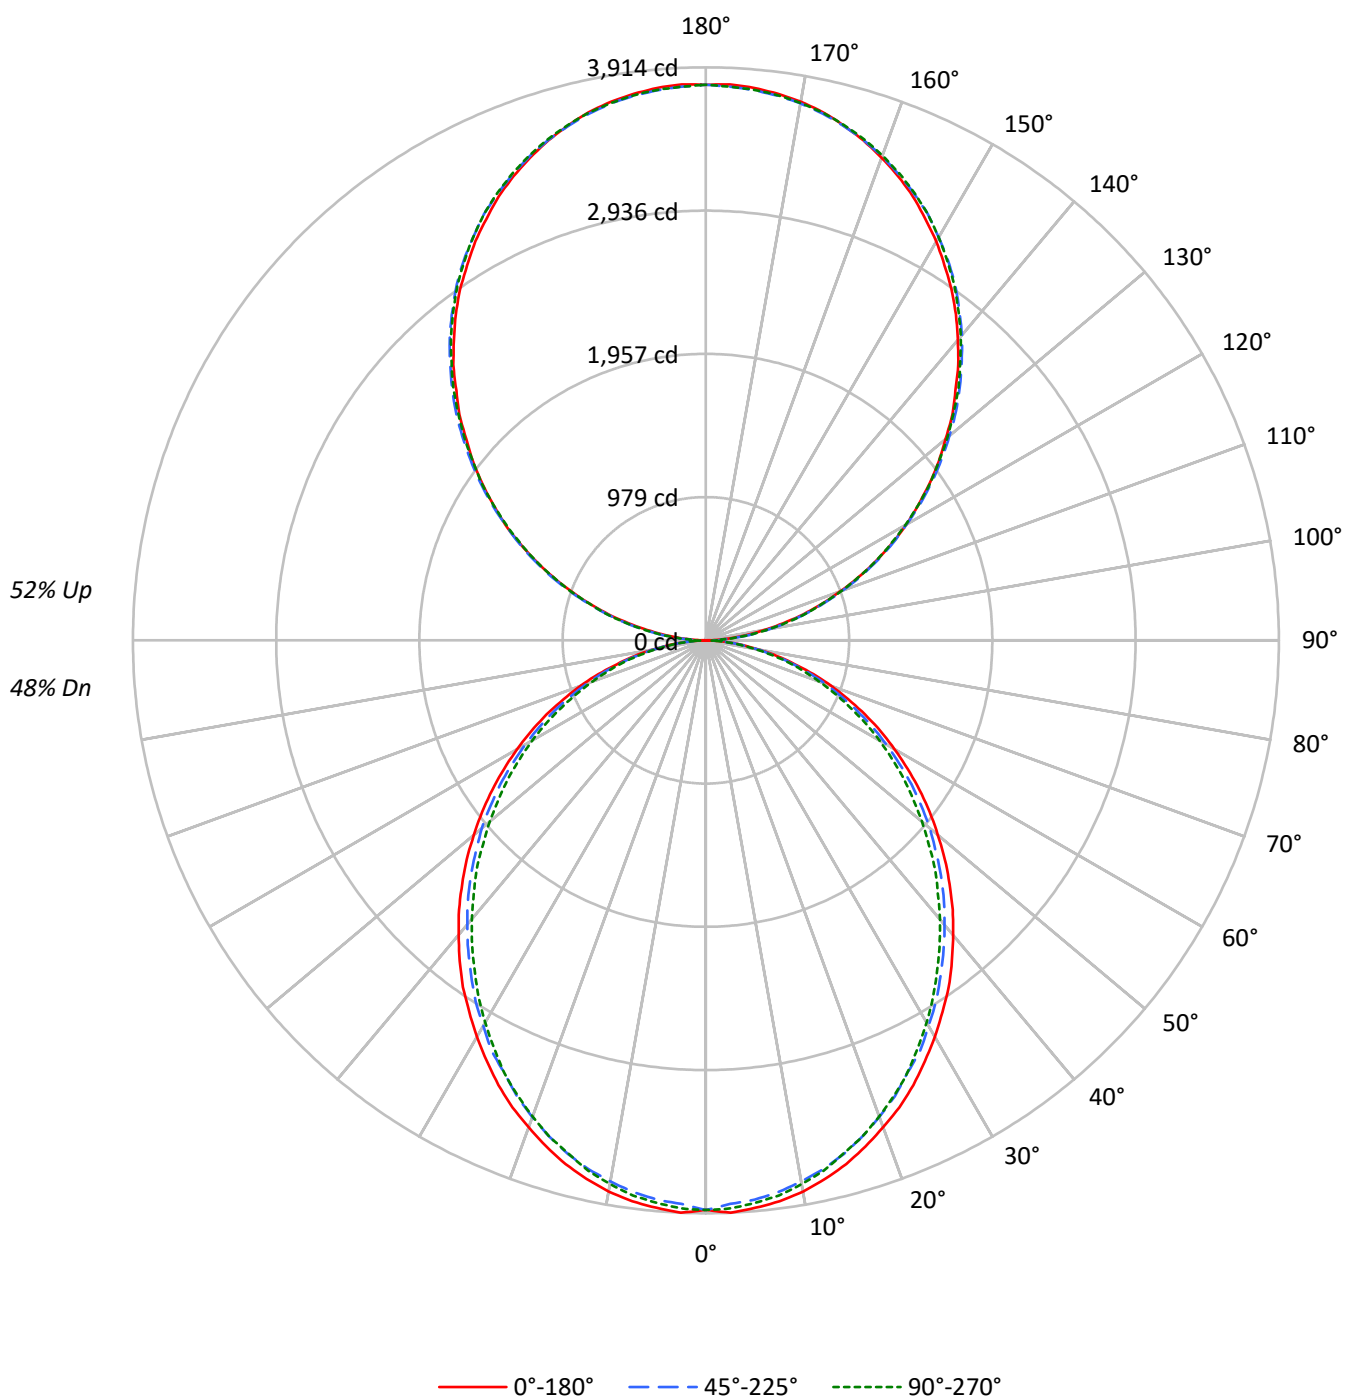

TEST NUMBER: P906588

CATALOG NUMBER: DFN2DIP-SQ3F0-100D120US835-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	55	55	55
1	97	93	89	86	89	86	82	79	72	70	68	60	58	57	48	47	46
2	89	81	75	70	81	75	70	65	63	59	56	52	50	47	42	41	39
3	81	71	64	58	74	66	60	54	56	51	47	46	43	40	38	35	33
4	74	63	55	49	68	59	52	46	50	44	40	41	37	34	34	31	28
5	68	56	48	42	62	52	45	40	44	39	35	37	33	30	30	27	25
6	63	51	42	37	57	47	40	34	40	34	30	34	29	26	27	24	22
7	58	46	38	32	53	42	35	30	36	31	27	30	26	23	25	22	19
8	54	41	34	28	49	39	32	27	33	28	24	28	24	20	23	20	17
9	50	38	30	25	46	35	28	24	30	25	21	26	21	18	21	18	16
10	47	35	27	23	43	32	26	21	28	23	19	24	20	17	20	17	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4458	4458	4458
5°	4463	4393	4424
10°	4424	4331	4363
15°	4356	4257	4268
20°	4265	4155	4171
25°	4175	4034	4059
30°	4062	3920	3916
35°	3955	3787	3766
40°	3824	3653	3623
45°	3693	3518	3476
50°	3550	3376	3306
55°	3400	3212	3150
60°	3230	3017	2970
65°	3044	2816	2759
70°	2807	2569	2531
75°	2480	2274	2319
80°	2084	1897	1917
85°	1467	1258	1254

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 3817 cd/sqm

TEST NUMBER: P906588

CATALOG NUMBER: DFN2DIP-SQ3F0-100D120US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	366.2	1.8
10°-20°	1030.4	5.0
20°-30°	1514.3	7.4
30°-40°	1758.8	8.6
40°-50°	1756.6	8.6
50°-60°	1531.7	7.5
60°-70°	1132.3	5.5
70°-80°	640.6	3.1
80°-90°	179.9	0.9
90°-100°	234.8	1.1
100°-110°	746.2	3.6
110°-120°	1276.9	6.2
120°-130°	1679.4	8.2
130°-140°	1885.0	9.2
140°-150°	1848.5	9.0
150°-160°	1550.6	7.6
160°-170°	1028.3	5.0
170°-180°	359.4	1.8
0°-30°	2911.0	14.2
0°-40°	4669.7	22.8
0°-60°	7958.0	38.8
0°-90°	9910.8	48.3
90°-120°	2257.9	11.0
90°-150°	7670.8	37.4
90°-180°	10609.0	51.7
0°-180°	20520.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3891	3891	3891	3891	3891	
5°	3891	3876	3835	3865	3858	369
15°	3704	3682	3633	3648	3630	1043
25°	3352	3323	3259	3266	3259	1543
35°	2892	2855	2795	2772	2754	1806
45°	2354	2327	2271	2230	2215	1816
55°	1781	1759	1714	1669	1650	1592
65°	1201	1179	1141	1108	1089	1188
75°	628	621	602	580	588	671
85°	153	150	146	135	131	171
90°	3	41	112	105	109	20
95°	167	199	205	205	199	186
105°	689	698	705	710	710	727
115°	1281	1300	1294	1291	1281	1267
125°	1864	1892	1883	1873	1870	1666
135°	2411	2446	2453	2450	2440	1863
145°	2927	2950	2968	2971	2959	1829
155°	3347	3356	3366	3382	3372	1540
165°	3641	3637	3637	3660	3644	1027
175°	3788	3779	3772	3795	3776	360
180°	3795	3795	3795	3795	3795	

TEST NUMBER: P906588

CATALOG NUMBER: DFN2DIP-SQ3F0-100D120US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3891.1	3891.1	3891.1	3891.1	3891.1
2.5°	3913.7	3895.0	3853.7	3891.1	3883.9
5°	3891.1	3876.4	3835.1	3864.9	3857.7
7.5°	3864.9	3842.6	3801.3	3831.5	3824.0
10°	3824.0	3797.8	3752.9	3782.7	3771.6
12.5°	3767.6	3745.4	3700.5	3719.2	3711.6
15°	3704.1	3681.9	3633.0	3648.1	3629.5
17.5°	3625.5	3603.3	3554.4	3573.1	3554.4
20°	3539.3	3517.1	3464.7	3475.8	3461.1
22.5°	3453.6	3419.9	3371.0	3371.0	3363.5
25°	3352.4	3322.6	3259.1	3266.2	3259.1
27.5°	3240.0	3213.8	3165.4	3154.3	3135.6
30°	3128.1	3097.9	3041.9	3030.8	3015.7
32.5°	3008.2	2986.0	2926.0	2903.4	2888.3
35°	2892.3	2855.0	2795.0	2772.4	2753.7
37.5°	2761.3	2727.5	2667.6	2641.4	2622.7
40°	2626.7	2596.5	2536.6	2503.3	2488.2
42.5°	2495.7	2465.5	2406.0	2368.3	2346.1
45°	2353.6	2327.4	2271.0	2230.1	2215.1
47.5°	2215.1	2188.9	2128.9	2087.6	2065.4
50°	2069.0	2050.3	1997.9	1945.5	1926.9
52.5°	1926.9	1900.7	1852.2	1811.0	1784.8
55°	1781.2	1758.6	1713.7	1668.8	1650.2
57.5°	1635.1	1616.4	1567.6	1522.8	1507.7
60°	1489.0	1474.3	1421.9	1380.6	1369.5
62.5°	1346.9	1320.7	1283.4	1246.1	1231.0
65°	1201.2	1178.6	1141.3	1107.5	1088.9
67.5°	1051.6	1032.5	999.2	973.0	957.9
70°	913.0	897.9	864.2	838.0	823.3
72.5°	770.9	755.8	737.2	711.0	699.8
75°	628.4	621.3	602.2	580.0	587.5
77.5°	501.4	486.3	478.7	467.6	456.5
80°	374.3	370.4	362.8	351.7	344.2
82.5°	254.5	254.5	250.9	235.8	235.8
85°	153.2	149.7	146.1	134.6	131.0
87.5°	67.5	59.9	52.4	41.3	37.3
90°	3.4	41.2	112.1	105.3	108.7
92.5°	70.9	96.1	99.5	103.0	103.0
95°	167.0	199.1	204.8	204.8	199.1
97.5°	278.0	307.8	320.4	320.4	320.4
100°	406.2	432.5	441.6	441.6	438.2
102.5°	541.2	560.6	573.2	576.7	573.2
105°	688.8	697.9	704.8	710.5	710.5
107.5°	835.2	849.0	849.0	851.2	835.2
110°	977.1	995.4	995.4	995.4	986.3

TEST NUMBER: P906588

CATALOG NUMBER: DFN2DIP-SQ3F0-100D120US835-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1130.4	1149.9	1146.4	1137.3	1130.4
115°	1281.4	1299.8	1294.0	1290.6	1281.4
117.5°	1431.3	1456.5	1440.5	1431.3	1422.2
120°	1582.4	1607.5	1582.4	1582.4	1572.1
122.5°	1719.7	1751.7	1735.7	1726.5	1719.7
125°	1863.8	1892.4	1883.3	1873.0	1869.5
127.5°	2004.6	2040.0	2027.4	2013.7	2004.6
130°	2136.1	2177.3	2171.6	2164.7	2152.1
132.5°	2283.7	2315.8	2318.0	2302.0	2292.9
135°	2410.7	2446.2	2453.1	2449.6	2440.5
137.5°	2552.6	2581.2	2586.9	2584.6	2570.9
140°	2677.3	2705.9	2721.9	2721.9	2709.3
142.5°	2805.5	2834.1	2843.2	2846.6	2834.1
145°	2926.7	2949.6	2967.9	2971.4	2958.8
147.5°	3035.4	3064.0	3077.8	3083.5	3070.9
150°	3147.6	3167.0	3179.6	3189.9	3179.6
152.5°	3247.1	3266.5	3282.6	3295.2	3282.6
155°	3346.6	3355.8	3366.1	3382.1	3371.8
157.5°	3432.5	3439.3	3445.0	3467.9	3451.9
160°	3509.1	3516.0	3519.4	3538.9	3525.1
162.5°	3580.0	3580.0	3583.5	3605.2	3589.2
165°	3640.7	3637.3	3637.3	3660.1	3644.1
167.5°	3695.6	3685.3	3685.3	3708.2	3692.2
170°	3736.8	3727.6	3724.2	3747.1	3727.6
172.5°	3765.4	3756.2	3752.8	3775.7	3756.2
175°	3788.3	3779.1	3772.3	3795.1	3775.7
177.5°	3800.9	3791.7	3784.8	3804.3	3784.8
180°	3795.1	3795.1	3795.1	3795.1	3795.1

TEST NUMBER: P906588

CATALOG NUMBER: DFN2DIP-SQ3F0-100D120US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.27	13.12	13.24	14.10	15.40	11.83	12.67	12.80	13.66	14.95
	3H	13.92	14.68	14.91	15.68	17.00	13.43	14.19	14.42	15.19	16.51
	4H	14.51	15.23	15.50	16.23	17.55	14.01	14.73	15.01	15.73	17.06
	6H	14.90	15.57	15.91	16.57	17.91	14.40	15.07	15.41	16.07	17.41
	8H	15.01	15.64	16.02	16.66	17.99	14.51	15.14	15.52	16.16	17.49
	12H	15.05	15.65	16.07	16.67	18.02	14.54	15.14	15.56	16.16	17.52
4H	2H	12.73	13.44	13.73	14.44	15.77	12.37	13.09	13.37	14.09	15.41
	3H	14.58	15.18	15.60	16.21	17.55	14.18	14.78	15.19	15.80	17.14
	4H	15.29	15.84	16.31	16.86	18.22	14.87	15.42	15.89	16.44	17.80
	6H	15.80	16.28	16.83	17.32	18.68	15.37	15.84	16.40	16.89	18.25
	8H	15.95	16.39	16.98	17.43	18.80	15.51	15.96	16.54	16.99	18.36
	12H	16.02	16.42	17.07	17.47	18.85	15.57	15.97	16.62	17.02	18.40
8H	4H	15.49	15.93	16.52	16.96	18.34	15.11	15.55	16.14	16.59	17.96
	6H	16.11	16.48	17.16	17.55	18.92	15.73	16.09	16.78	17.17	18.54
	8H	16.33	16.65	17.39	17.71	19.10	15.93	16.26	17.00	17.32	18.71
	12H	16.45	16.74	17.52	17.79	19.23	16.04	16.33	17.11	17.38	18.82
12H	4H	15.47	15.87	16.52	16.92	18.30	15.10	15.50	16.15	16.55	17.93
	6H	16.14	16.46	17.20	17.52	18.91	15.77	16.09	16.83	17.15	18.54
	8H	16.38	16.66	17.44	17.72	19.15	15.99	16.28	17.06	17.33	18.77