

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906624

Luminaire Tested: DFN2DIP-SQ3F0-110D120US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906624
REPORT IS A COMBINATION OF REPORTS P900019 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-110D120US835-FLLFLL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 21510.0 lumens
Efficiency: N/A
Efficacy: 104.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 206
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906624

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US835-FLLFLL

Luminous Intensity Polar Plot

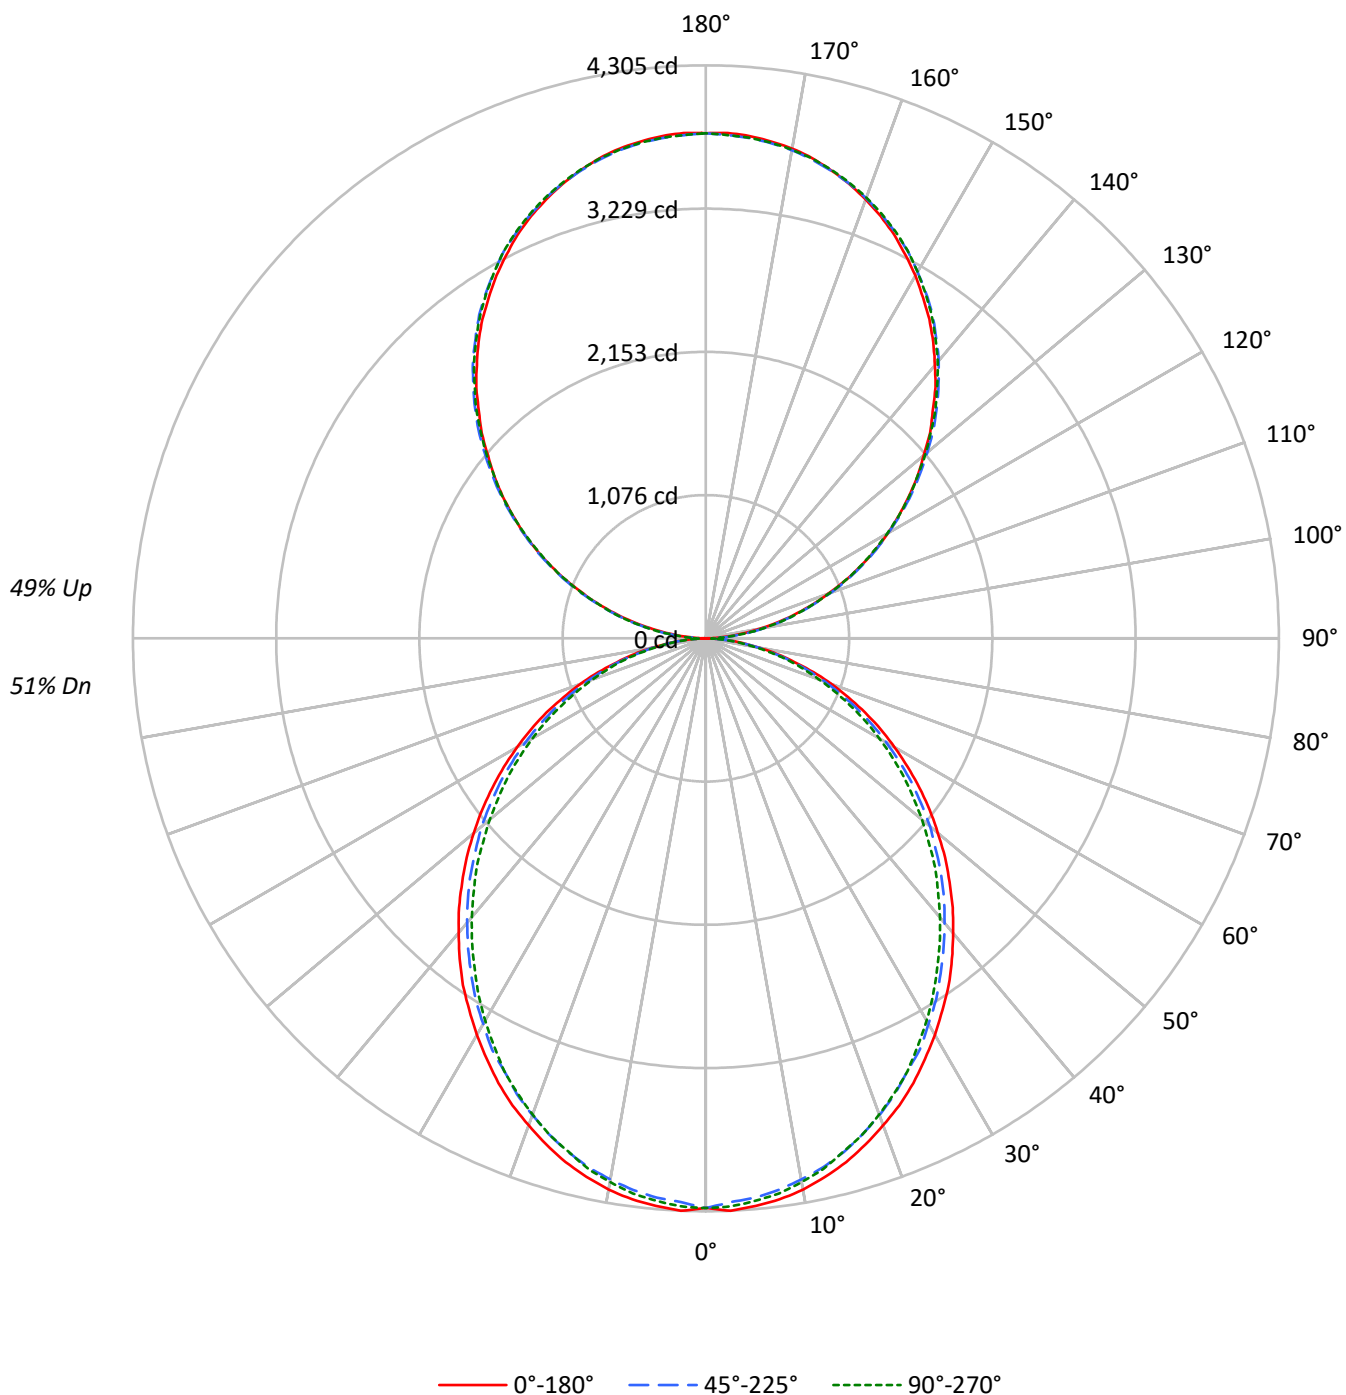

TEST NUMBER: P906624

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US835-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57
1	98	94	90	86	90	87	83	80	73	71	69	61	60	58	50	49	48
2	89	82	76	70	82	76	70	66	64	60	57	54	51	48	44	42	40
3	81	72	65	59	75	67	60	55	57	52	48	48	44	41	39	37	34
4	74	64	56	50	68	59	52	47	50	45	41	42	38	35	35	32	30
5	68	57	49	43	63	53	45	40	45	40	35	38	34	30	32	28	26
6	63	51	43	37	58	47	40	35	41	35	31	34	30	27	29	25	23
7	58	46	38	32	54	43	36	31	37	31	27	31	27	24	26	23	20
8	54	42	34	29	50	39	32	27	34	28	24	29	24	21	24	21	18
9	50	38	31	25	46	36	29	24	31	25	22	26	22	19	22	19	16
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	21	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4904	4904	4904
5°	4909	4833	4867
10°	4866	4764	4799
15°	4791	4683	4695
20°	4692	4570	4588
25°	4592	4437	4464
30°	4468	4312	4308
35°	4351	4166	4142
40°	4207	4018	3985
45°	4063	3869	3824
50°	3905	3713	3637
55°	3740	3533	3465
60°	3553	3319	3268
65°	3348	3097	3035
70°	3088	2826	2784
75°	2728	2502	2551
80°	2293	2087	2108
85°	1614	1383	1380

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4063 cd/sqm

TEST NUMBER: P906624

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	402.8	1.9
10°-20°	1133.5	5.3
20°-30°	1665.7	7.7
30°-40°	1934.7	9.0
40°-50°	1932.3	9.0
50°-60°	1684.9	7.8
60°-70°	1245.5	5.8
70°-80°	704.7	3.3
80°-90°	196.8	0.9
90°-100°	234.8	1.1
100°-110°	746.2	3.5
110°-120°	1276.9	5.9
120°-130°	1679.4	7.8
130°-140°	1885.0	8.8
140°-150°	1848.5	8.6
150°-160°	1550.6	7.2
160°-170°	1028.3	4.8
170°-180°	359.4	1.7
0°-30°	3202.1	14.9
0°-40°	5136.7	23.9
0°-60°	8753.8	40.7
0°-90°	10900.8	50.7
90°-120°	2257.9	10.5
90°-150°	7670.8	35.7
90°-180°	10609.0	49.3
0°-180°	21510.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4280	4280	4280	4280	4280	
5°	4280	4264	4219	4251	4244	406
15°	4074	4050	3996	4013	3992	1148
25°	3688	3655	3585	3593	3585	1697
35°	3182	3140	3074	3050	3029	1987
45°	2589	2560	2498	2453	2437	1998
55°	1959	1934	1885	1836	1815	1752
65°	1321	1296	1255	1218	1198	1306
75°	691	683	662	638	646	738
85°	169	165	161	148	144	188
90°	3	41	112	105	109	21
95°	167	199	205	205	199	186
105°	689	698	705	710	710	727
115°	1281	1300	1294	1291	1281	1267
125°	1864	1892	1883	1873	1870	1666
135°	2411	2446	2453	2450	2440	1863
145°	2927	2950	2968	2971	2959	1829
155°	3347	3356	3366	3382	3372	1540
165°	3641	3637	3637	3660	3644	1027
175°	3788	3779	3772	3795	3776	360
180°	3795	3795	3795	3795	3795	

TEST NUMBER: P906624

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4280.2	4280.2	4280.2	4280.2	4280.2
2.5°	4305.0	4284.5	4239.1	4280.2	4272.3
5°	4280.2	4264.0	4218.6	4251.3	4243.5
7.5°	4251.3	4226.9	4181.5	4214.7	4206.4
10°	4206.4	4177.5	4128.2	4160.9	4148.7
12.5°	4144.4	4119.9	4070.6	4091.1	4082.8
15°	4074.5	4050.0	3996.3	4012.9	3992.4
17.5°	3988.0	3963.6	3909.9	3930.4	3909.9
20°	3893.3	3868.8	3811.2	3823.4	3807.3
22.5°	3799.0	3761.8	3708.1	3708.1	3699.8
25°	3687.6	3654.9	3585.0	3592.9	3585.0
27.5°	3564.0	3535.2	3481.9	3469.7	3449.2
30°	3440.9	3407.7	3346.1	3333.9	3317.3
32.5°	3309.0	3284.6	3218.6	3193.7	3177.1
35°	3181.5	3140.5	3074.5	3049.6	3029.1
37.5°	3037.4	3000.3	2934.4	2905.5	2885.0
40°	2889.4	2856.2	2790.3	2753.6	2737.0
42.5°	2745.3	2712.1	2646.6	2605.1	2580.7
45°	2589.0	2560.1	2498.1	2453.2	2436.6
47.5°	2436.6	2407.8	2341.8	2296.4	2271.9
50°	2275.9	2255.4	2197.7	2140.1	2119.6
52.5°	2119.6	2090.7	2037.5	1992.0	1963.2
55°	1959.3	1934.4	1885.1	1835.7	1815.2
57.5°	1798.6	1778.1	1724.4	1675.0	1658.4
60°	1637.9	1621.8	1564.1	1518.7	1506.5
62.5°	1481.6	1452.8	1411.7	1370.7	1354.1
65°	1321.3	1296.4	1255.4	1218.3	1197.8
67.5°	1156.7	1135.8	1099.1	1070.3	1053.7
70°	1004.3	987.7	950.6	921.8	905.6
72.5°	848.0	831.4	810.9	782.1	769.8
75°	691.2	683.4	662.4	638.0	646.3
77.5°	551.5	534.9	526.6	514.4	502.2
80°	411.8	407.4	399.1	386.9	378.6
82.5°	279.9	279.9	276.0	259.4	259.4
85°	168.6	164.6	160.7	148.0	144.1
87.5°	74.2	65.9	57.6	45.4	41.0
90°	3.4	41.2	112.1	105.3	108.7
92.5°	70.9	96.1	99.5	103.0	103.0
95°	167.0	199.1	204.8	204.8	199.1
97.5°	278.0	307.8	320.4	320.4	320.4
100°	406.2	432.5	441.6	441.6	438.2
102.5°	541.2	560.6	573.2	576.7	573.2
105°	688.8	697.9	704.8	710.5	710.5
107.5°	835.2	849.0	849.0	851.2	835.2
110°	977.1	995.4	995.4	995.4	986.3

TEST NUMBER: P906624

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US835-FLLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1130.4	1149.9	1146.4	1137.3	1130.4
115°	1281.4	1299.8	1294.0	1290.6	1281.4
117.5°	1431.3	1456.5	1440.5	1431.3	1422.2
120°	1582.4	1607.5	1582.4	1582.4	1572.1
122.5°	1719.7	1751.7	1735.7	1726.5	1719.7
125°	1863.8	1892.4	1883.3	1873.0	1869.5
127.5°	2004.6	2040.0	2027.4	2013.7	2004.6
130°	2136.1	2177.3	2171.6	2164.7	2152.1
132.5°	2283.7	2315.8	2318.0	2302.0	2292.9
135°	2410.7	2446.2	2453.1	2449.6	2440.5
137.5°	2552.6	2581.2	2586.9	2584.6	2570.9
140°	2677.3	2705.9	2721.9	2721.9	2709.3
142.5°	2805.5	2834.1	2843.2	2846.6	2834.1
145°	2926.7	2949.6	2967.9	2971.4	2958.8
147.5°	3035.4	3064.0	3077.8	3083.5	3070.9
150°	3147.6	3167.0	3179.6	3189.9	3179.6
152.5°	3247.1	3266.5	3282.6	3295.2	3282.6
155°	3346.6	3355.8	3366.1	3382.1	3371.8
157.5°	3432.5	3439.3	3445.0	3467.9	3451.9
160°	3509.1	3516.0	3519.4	3538.9	3525.1
162.5°	3580.0	3580.0	3583.5	3605.2	3589.2
165°	3640.7	3637.3	3637.3	3660.1	3644.1
167.5°	3695.6	3685.3	3685.3	3708.2	3692.2
170°	3736.8	3727.6	3724.2	3747.1	3727.6
172.5°	3765.4	3756.2	3752.8	3775.7	3756.2
175°	3788.3	3779.1	3772.3	3795.1	3775.7
177.5°	3800.9	3791.7	3784.8	3804.3	3784.8
180°	3795.1	3795.1	3795.1	3795.1	3795.1

TEST NUMBER: P906624

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.82	13.69	13.77	14.66	15.92	12.38	13.25	13.33	14.21	15.48
	3H	14.48	15.26	15.44	16.23	17.52	13.99	14.77	14.95	15.74	17.03
	4H	15.06	15.80	16.04	16.78	18.07	14.57	15.31	15.55	16.29	17.58
	6H	15.46	16.14	16.45	17.13	18.43	14.96	15.64	15.95	16.63	17.93
	8H	15.56	16.21	16.56	17.21	18.52	15.06	15.71	16.06	16.71	18.01
	12H	15.61	16.23	16.61	17.22	18.55	15.10	15.72	16.10	16.71	18.04
4H	2H	13.28	14.02	14.26	15.00	16.29	12.93	13.66	13.91	14.64	15.94
	3H	15.14	15.76	16.13	16.77	18.07	14.73	15.35	15.73	16.36	17.67
	4H	15.85	16.42	16.85	17.42	18.75	15.43	15.99	16.43	16.99	18.32
	6H	16.36	16.85	17.38	17.87	19.20	15.93	16.42	16.94	17.44	18.77
	8H	16.51	16.96	17.53	17.98	19.33	16.07	16.53	17.09	17.55	18.89
	12H	16.58	16.99	17.61	18.03	19.37	16.13	16.54	17.17	17.58	18.93
8H	4H	16.05	16.50	17.06	17.52	18.86	15.67	16.12	16.68	17.14	18.48
	6H	16.67	17.05	17.71	18.11	19.45	16.29	16.66	17.33	17.72	19.06
	8H	16.89	17.22	17.93	18.27	19.62	16.50	16.83	17.54	17.87	19.23
	12H	17.02	17.31	18.07	18.35	19.75	16.61	16.90	17.66	17.94	19.34
12H	4H	16.03	16.44	17.06	17.47	18.82	15.66	16.07	16.69	17.11	18.45
	6H	16.70	17.03	17.75	18.08	19.44	16.33	16.66	17.37	17.70	19.06
	8H	16.94	17.23	17.99	18.27	19.67	16.56	16.85	17.61	17.89	19.29