

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P909166

Luminaire Tested: DFN2DIP-SQ3F0-060D100US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P909166
REPORT IS A COMBINATION OF REPORTS P899974 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-060D100US840-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14087.6 lumens
Efficiency: N/A
Efficacy: 107.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 130.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P909166
CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US840-RLFL

Luminous Intensity Polar Plot

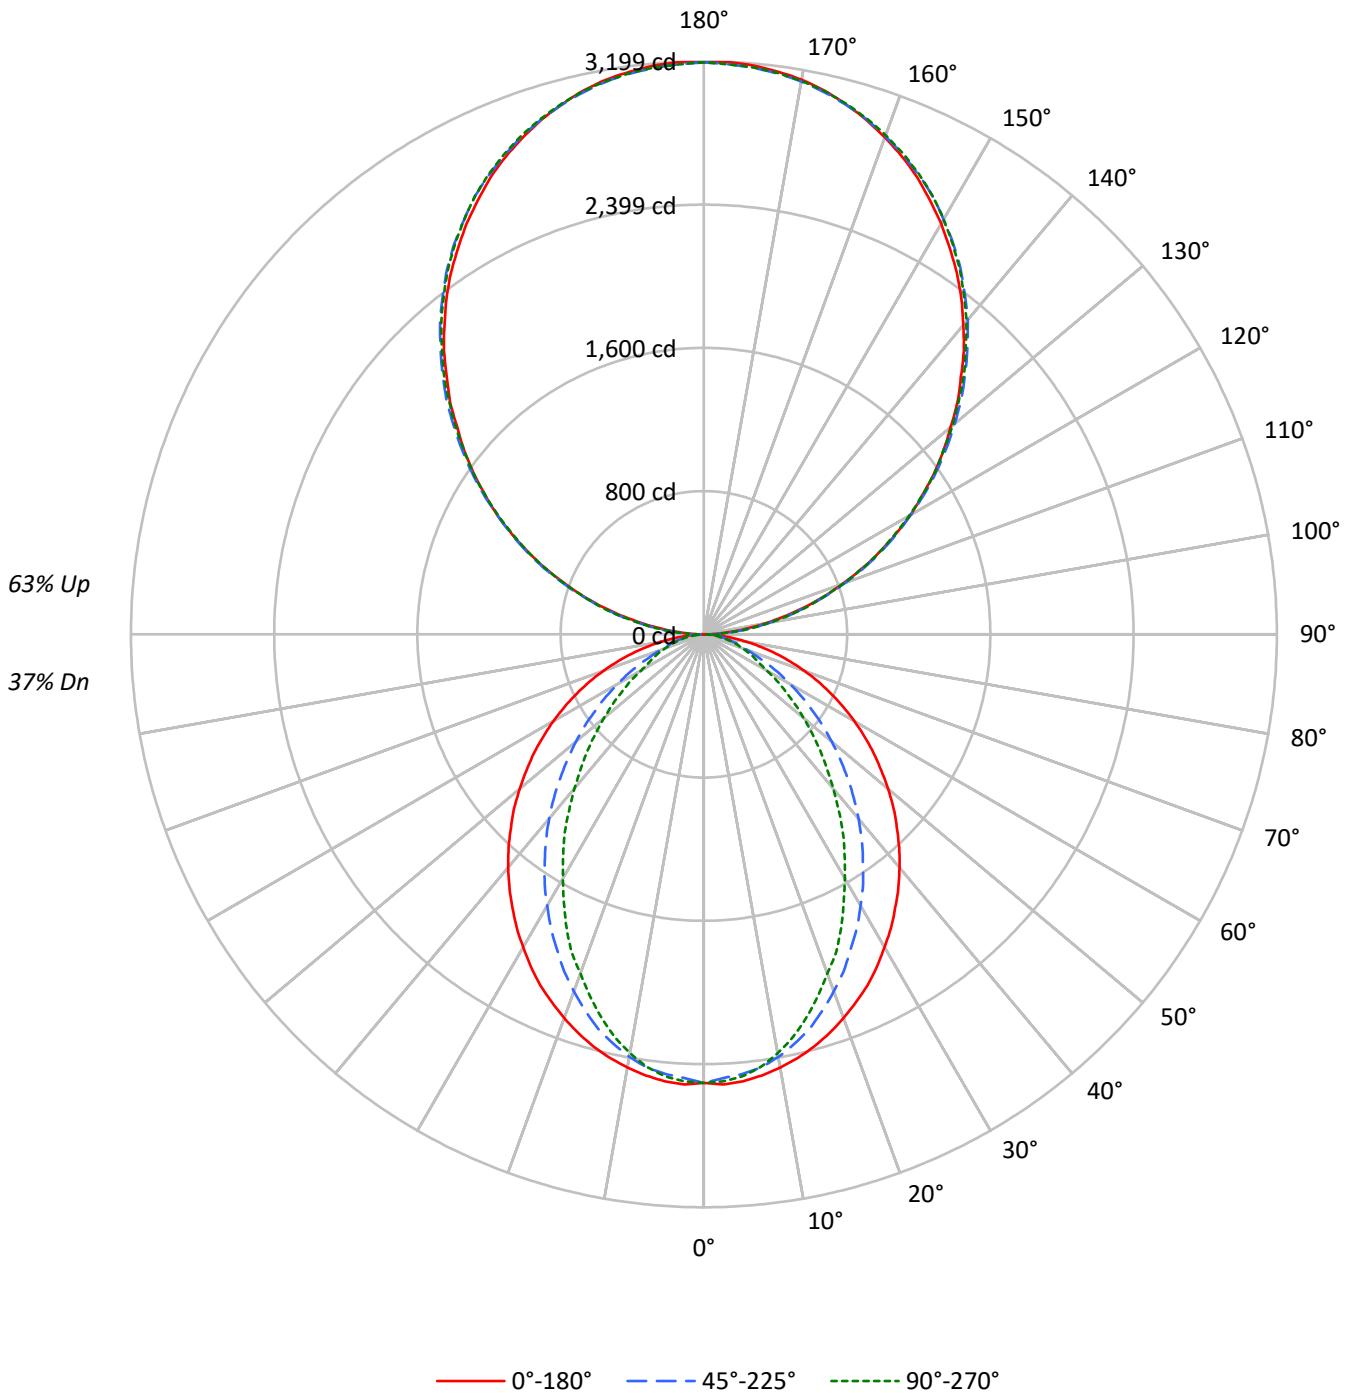



TEST NUMBER: P909166

CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US840-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	37				37
1	95	91	87	84	86	83	80	77	67	65	63	53	51	50	39	38	38	32				32
2	87	80	74	69	79	73	68	63	59	56	53	47	44	42	35	34	32	27				27
3	79	70	64	58	72	64	58	53	52	48	45	41	39	36	31	29	28	23				23
4	73	63	55	49	66	57	51	46	47	42	38	37	34	31	28	26	24	20				20
5	67	56	48	42	60	51	44	39	42	37	33	33	30	27	26	23	21	18				18
6	62	50	42	37	56	46	39	34	38	33	29	30	27	24	23	21	19	16				16
7	57	45	38	32	52	41	35	30	34	29	26	28	24	21	21	19	17	14				14
8	53	41	34	29	48	38	31	27	31	26	23	25	22	19	20	17	15	13				13
9	49	38	30	25	45	34	28	24	29	24	20	23	20	17	18	16	14	12				12
10	46	34	27	23	42	32	25	21	26	22	18	22	18	16	17	14	13	11				11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2869	2869	2869
5°	2872	2822	2841
10°	2842	2765	2748
15°	2801	2671	2604
20°	2747	2544	2428
25°	2692	2401	2258
30°	2619	2255	2042
35°	2548	2098	1853
40°	2475	1935	1637
45°	2390	1755	1440
50°	2302	1574	1248
55°	2210	1380	1064
60°	2104	1178	875
65°	1981	973	787
70°	1832	781	711
75°	1646	685	644
80°	1375	568	556
85°	933	370	412

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 3213 cd/sqm



TEST NUMBER: P909166

CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US840-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	234.7	1.7
10°-20°	644.3	4.6
20°-30°	904.6	6.4
30°-40°	986.1	7.0
40°-50°	906.3	6.4
50°-60°	711.7	5.1
60°-70°	463.3	3.3
70°-80°	238.5	1.7
80°-90°	70.0	0.5
90°-100°	197.6	1.4
100°-110°	627.9	4.5
110°-120°	1074.6	7.6
120°-130°	1413.3	10.0
130°-140°	1586.4	11.3
140°-150°	1555.6	11.0
150°-160°	1304.9	9.3
160°-170°	865.4	6.1
170°-180°	302.5	2.1
0°-30°	1783.6	12.7
0°-40°	2769.6	19.7
0°-60°	4387.7	31.1
0°-90°	5159.4	36.6
90°-120°	1900.2	13.5
90°-150°	6455.4	45.8
90°-180°	8928.0	63.4
0°-180°	14087.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2504	2504	2504	2504	2504	
5°	2504	2493	2463	2484	2477	237
15°	2382	2357	2280	2237	2214	671
25°	2162	2090	1940	1847	1813	994
35°	1863	1747	1548	1405	1355	1166
45°	1523	1371	1133	972	918	1176
55°	1158	981	736	601	558	1035
65°	782	598	394	317	310	775
75°	417	258	181	165	163	441
85°	97	50	43	43	43	112
90°	3	35	94	89	92	14
95°	141	168	172	172	168	156
105°	580	587	593	598	598	612
115°	1078	1094	1089	1086	1078	1067
125°	1568	1593	1585	1576	1573	1402
135°	2029	2059	2064	2062	2054	1568
145°	2463	2482	2498	2500	2490	1539
155°	2816	2824	2833	2846	2838	1296
165°	3064	3061	3061	3080	3067	864
175°	3188	3180	3175	3194	3177	303
180°	3194	3194	3194	3194	3194	



TEST NUMBER: P909166

CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US840-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2504.3	2504.3	2504.3	2504.3	2504.3
2.5°	2515.6	2504.3	2479.2	2502.0	2497.5
5°	2504.3	2493.0	2463.4	2483.9	2477.1
7.5°	2483.9	2470.3	2438.6	2447.5	2436.2
10°	2456.6	2440.7	2395.6	2388.6	2375.1
12.5°	2422.8	2402.3	2341.0	2327.5	2302.5
15°	2381.9	2356.8	2279.9	2236.9	2214.2
17.5°	2334.3	2297.9	2202.7	2152.9	2116.7
20°	2279.9	2234.4	2121.2	2064.7	2014.7
22.5°	2221.0	2168.8	2037.3	1960.4	1926.4
25°	2162.1	2089.5	1940.0	1847.1	1813.0
27.5°	2091.9	2014.7	1849.3	1742.7	1690.6
30°	2017.1	1930.8	1749.5	1634.1	1572.8
32.5°	1944.5	1840.2	1654.6	1518.4	1461.7
35°	1863.0	1747.4	1548.0	1405.1	1355.1
37.5°	1783.6	1658.8	1448.2	1291.7	1235.2
40°	1699.7	1563.9	1343.8	1183.0	1124.1
42.5°	1613.7	1468.6	1239.7	1071.9	1015.4
45°	1523.0	1371.0	1133.3	972.1	917.8
47.5°	1436.9	1276.1	1031.3	870.2	820.4
50°	1341.7	1180.8	931.5	775.0	727.6
52.5°	1248.6	1078.6	836.3	686.7	643.7
55°	1158.0	981.3	736.5	600.7	557.5
57.5°	1065.2	883.8	648.2	521.3	484.9
60°	970.0	788.7	555.2	439.8	403.4
62.5°	877.2	695.9	475.8	367.2	349.1
65°	781.9	598.2	394.4	317.4	310.4
67.5°	691.3	507.6	317.4	278.7	272.0
70°	596.0	419.3	262.8	240.2	231.1
72.5°	505.4	337.6	219.7	201.8	197.1
75°	417.0	258.2	181.3	165.4	163.3
77.5°	328.7	183.5	142.8	133.7	129.2
80°	246.9	131.5	108.7	99.8	99.8
82.5°	172.2	88.5	74.7	70.2	70.2
85°	97.4	49.8	43.0	43.0	43.0
87.5°	36.4	18.1	18.1	15.9	15.9
90°	2.9	34.6	94.3	88.6	91.5
92.5°	59.7	80.9	83.8	86.6	86.6
95°	140.6	167.5	172.4	172.4	167.5
97.5°	234.0	259.0	269.6	269.6	269.6
100°	341.8	364.0	371.6	371.6	368.8
102.5°	455.4	471.8	482.4	485.2	482.4
105°	579.7	587.3	593.1	597.9	597.9
107.5°	702.9	714.5	714.5	716.4	702.9
110°	822.3	837.7	837.7	837.7	830.0



TEST NUMBER: P909166

CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US840-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	951.3	967.7	964.8	957.0	951.3
115°	1078.4	1093.8	1089.0	1086.1	1078.4
117.5°	1204.6	1225.8	1212.2	1204.6	1196.8
120°	1331.6	1352.8	1331.6	1331.6	1323.0
122.5°	1447.1	1474.1	1460.7	1453.0	1447.1
125°	1568.5	1592.6	1584.9	1576.2	1573.4
127.5°	1687.0	1716.8	1706.2	1694.7	1687.0
130°	1797.7	1832.3	1827.6	1821.7	1811.2
132.5°	1921.9	1948.8	1950.8	1937.3	1929.6
135°	2028.7	2058.6	2064.4	2061.5	2053.8
137.5°	2148.2	2172.2	2177.1	2175.1	2163.5
140°	2253.1	2277.1	2290.7	2290.7	2280.1
142.5°	2361.0	2385.0	2392.7	2395.6	2385.0
145°	2463.0	2482.2	2497.7	2500.5	2489.9
147.5°	2554.5	2578.6	2590.1	2595.0	2584.3
150°	2648.9	2665.2	2675.8	2684.4	2675.8
152.5°	2732.6	2749.0	2762.5	2773.1	2762.5
155°	2816.4	2824.1	2832.8	2846.2	2837.5
157.5°	2888.6	2894.4	2899.2	2918.4	2905.0
160°	2953.1	2958.9	2961.7	2978.1	2966.6
162.5°	3012.8	3012.8	3015.7	3033.9	3020.5
165°	3063.8	3060.9	3060.9	3080.2	3066.8
167.5°	3110.1	3101.4	3101.4	3120.7	3107.2
170°	3144.7	3137.0	3134.1	3153.4	3137.0
172.5°	3168.8	3161.1	3158.2	3177.4	3161.1
175°	3188.0	3180.4	3174.6	3193.8	3177.4
177.5°	3198.6	3191.0	3185.1	3201.5	3185.1
180°	3193.8	3193.8	3193.8	3193.8	3193.8



TEST NUMBER: P909166
 CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.38	10.11	10.45	11.18	12.63	5.34	6.07	6.41	7.14	8.59
	3H	11.04	11.70	12.12	12.78	14.25	6.51	7.17	7.59	8.25	9.72
	4H	11.65	12.27	12.74	13.34	14.82	6.96	7.58	8.05	8.65	10.13
	6H	12.06	12.63	13.16	13.71	15.20	7.27	7.84	8.37	8.92	10.41
	8H	12.18	12.72	13.28	13.82	15.30	7.35	7.89	8.45	8.99	10.47
	12H	12.24	12.75	13.34	13.84	15.35	7.39	7.90	8.50	8.99	10.50
4H	2H	9.38	10.00	10.48	11.08	12.56	5.92	6.54	7.02	7.62	9.10
	3H	11.20	11.71	12.30	12.82	14.31	7.25	7.77	8.36	8.88	10.37
	4H	11.88	12.36	12.99	13.45	14.96	7.79	8.27	8.90	9.36	10.87
	6H	12.39	12.79	13.50	13.91	15.41	8.20	8.61	9.32	9.72	11.23
	8H	12.56	12.94	13.67	14.05	15.57	8.32	8.70	9.44	9.81	11.33
	12H	12.65	12.99	13.78	14.11	15.64	8.38	8.72	9.51	9.85	11.37
8H	4H	11.84	12.22	12.96	13.33	14.85	8.06	8.44	9.18	9.55	11.07
	6H	12.40	12.71	13.53	13.86	15.38	8.57	8.88	9.71	10.03	11.55
	8H	12.61	12.88	13.75	14.02	15.55	8.76	9.03	9.90	10.16	11.70
	12H	12.74	12.98	13.89	14.11	15.68	8.86	9.10	10.01	10.23	11.81
12H	4H	11.79	12.13	12.92	13.25	14.78	8.06	8.41	9.19	9.53	11.05
	6H	12.37	12.65	13.52	13.78	15.31	8.62	8.89	9.76	10.02	11.56
	8H	12.59	12.83	13.73	13.95	15.53	8.82	9.06	9.96	10.19	11.76