

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P909274

Luminaire Tested: DFN2DIP-SQ3F0-090D100US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P909274
REPORT IS A COMBINATION OF REPORTS P899980 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-090D100US840-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 16662.8 lumens
Efficiency: N/A
Efficacy: 100.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 165.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P909274
CATALOG NUMBER: DFN2DIP-SQ3F0-090D100US840-RLFL

Luminous Intensity Polar Plot

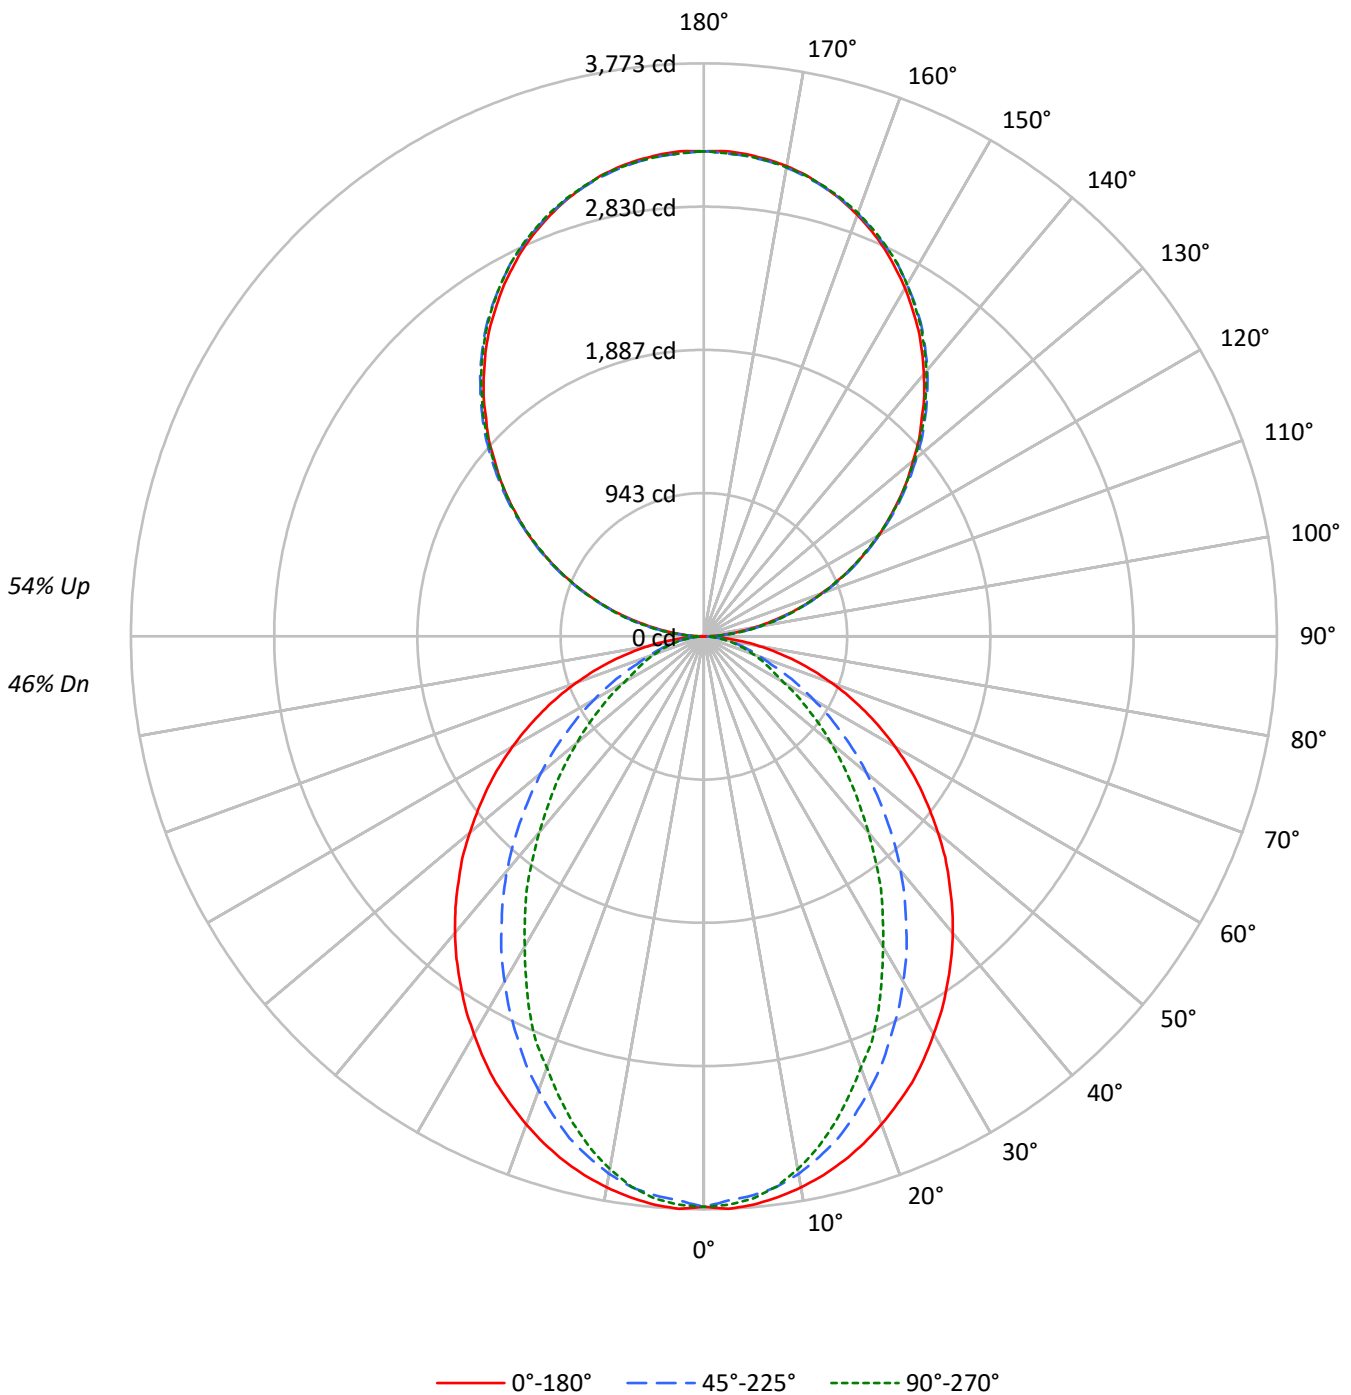



TEST NUMBER: P909274

CATALOG NUMBER: DFN2DIP-SQ3F0-090D100US840-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53	46			46
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45	40			40
2	89	82	76	71	82	76	71	66	64	60	57	52	50	48	42	41	39	34			34
3	82	72	65	60	75	67	61	56	56	52	48	47	44	41	38	36	34	30			30
4	75	64	57	51	69	60	53	48	50	45	41	42	38	35	34	32	29	26			26
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26	23			23
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23	20			20
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21	18			18
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19	16			16
9	51	39	32	27	47	36	30	25	31	26	23	27	23	20	22	19	17	15			15
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	21	18	15	13			13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4304	4304	4304
5°	4308	4233	4261
10°	4263	4147	4121
15°	4201	4007	3906
20°	4121	3816	3642
25°	4039	3601	3387
30°	3929	3382	3064
35°	3822	3146	2780
40°	3712	2903	2455
45°	3585	2633	2160
50°	3453	2361	1873
55°	3315	2070	1596
60°	3156	1767	1313
65°	2972	1459	1180
70°	2749	1172	1066
75°	2468	1027	966
80°	2062	852	834
85°	1398	555	618

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3585 cd/sqm



TEST NUMBER: P909274

CATALOG NUMBER: DFN2DIP-SQ3F0-090D100US840-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	352.1	2.1
10°-20°	966.5	5.8
20°-30°	1356.9	8.1
30°-40°	1479.1	8.9
40°-50°	1359.4	8.2
50°-60°	1067.6	6.4
60°-70°	694.9	4.2
70°-80°	357.7	2.1
80°-90°	100.4	0.6
90°-100°	197.6	1.2
100°-110°	627.9	3.8
110°-120°	1074.6	6.4
120°-130°	1413.3	8.5
130°-140°	1586.4	9.5
140°-150°	1555.6	9.3
150°-160°	1304.9	7.8
160°-170°	865.4	5.2
170°-180°	302.5	1.8
0°-30°	2675.4	16.1
0°-40°	4154.5	24.9
0°-60°	6581.5	39.5
0°-90°	7734.6	46.4
90°-120°	1900.2	11.4
90°-150°	6455.4	38.7
90°-180°	8928.0	53.6
0°-180°	16662.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3756	3756	3756	3756	3756	
5°	3756	3739	3695	3726	3716	356
15°	3573	3535	3420	3355	3321	1007
25°	3243	3134	2910	2771	2720	1492
35°	2794	2621	2322	2108	2033	1749
45°	2284	2057	1700	1458	1377	1764
55°	1737	1472	1105	901	836	1552
65°	1173	897	592	476	466	1163
75°	625	387	272	248	245	661
85°	146	75	64	64	64	168
90°	3	35	94	89	92	16
95°	141	168	172	172	168	156
105°	580	587	593	598	598	612
115°	1078	1094	1089	1086	1078	1067
125°	1568	1593	1585	1576	1573	1402
135°	2029	2059	2064	2062	2054	1568
145°	2463	2482	2498	2500	2490	1539
155°	2816	2824	2833	2846	2838	1296
165°	3064	3061	3061	3080	3067	864
175°	3188	3180	3175	3194	3177	303
180°	3194	3194	3194	3194	3194	



TEST NUMBER: P909274

CATALOG NUMBER: DFN2DIP-SQ3F0-090D100US840-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3756.4	3756.4	3756.4	3756.4	3756.4
2.5°	3773.4	3756.4	3718.8	3753.2	3746.3
5°	3756.4	3739.4	3695.1	3725.7	3715.6
7.5°	3725.7	3705.5	3657.9	3671.3	3654.3
10°	3685.0	3661.2	3593.4	3582.9	3562.7
12.5°	3634.1	3603.5	3511.5	3491.3	3453.7
15°	3572.8	3535.3	3419.9	3355.3	3321.4
17.5°	3501.4	3447.0	3304.1	3229.4	3175.0
20°	3419.9	3351.7	3181.8	3097.1	3022.0
22.5°	3331.5	3253.3	3056.0	2940.5	2889.7
25°	3243.2	3134.2	2909.9	2770.7	2719.5
27.5°	3137.9	3022.0	2773.9	2614.1	2535.9
30°	3025.7	2896.2	2624.2	2451.1	2359.1
32.5°	2916.7	2760.2	2481.7	2277.7	2192.5
35°	2794.5	2621.0	2322.0	2107.8	2032.8
37.5°	2675.4	2488.3	2172.3	1937.5	1852.8
40°	2549.6	2345.8	2015.8	1774.5	1686.2
42.5°	2420.4	2203.0	1859.6	1607.9	1523.1
45°	2284.5	2056.6	1699.8	1458.1	1376.6
47.5°	2155.4	1914.1	1546.9	1305.3	1230.6
50°	2012.6	1771.2	1397.2	1162.5	1091.4
52.5°	1873.0	1618.0	1254.5	1030.1	965.5
55°	1737.0	1471.9	1104.7	901.0	836.4
57.5°	1597.8	1325.9	972.4	781.9	727.5
60°	1454.9	1183.0	832.8	659.6	605.2
62.5°	1315.8	1043.8	713.8	550.8	523.7
65°	1172.9	897.4	591.5	476.1	465.6
67.5°	1036.9	761.3	476.1	418.0	407.9
70°	894.1	629.0	394.3	360.3	346.6
72.5°	758.1	506.3	329.6	302.6	295.8
75°	625.4	387.4	272.0	248.1	244.9
77.5°	493.0	275.2	214.2	200.6	193.7
80°	370.4	197.3	163.0	149.7	149.7
82.5°	258.2	132.7	112.2	105.3	105.3
85°	146.0	74.6	64.5	64.5	64.5
87.5°	54.4	27.1	27.1	23.8	23.8
90°	2.9	34.6	94.3	88.6	91.5
92.5°	59.7	80.9	83.8	86.6	86.6
95°	140.6	167.5	172.4	172.4	167.5
97.5°	234.0	259.0	269.6	269.6	269.6
100°	341.8	364.0	371.6	371.6	368.8
102.5°	455.4	471.8	482.4	485.2	482.4
105°	579.7	587.3	593.1	597.9	597.9
107.5°	702.9	714.5	714.5	716.4	702.9
110°	822.3	837.7	837.7	837.7	830.0



TEST NUMBER: P909274

CATALOG NUMBER: DFN2DIP-SQ3F0-090D100US840-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	951.3	967.7	964.8	957.0	951.3
115°	1078.4	1093.8	1089.0	1086.1	1078.4
117.5°	1204.6	1225.8	1212.2	1204.6	1196.8
120°	1331.6	1352.8	1331.6	1331.6	1323.0
122.5°	1447.1	1474.1	1460.7	1453.0	1447.1
125°	1568.5	1592.6	1584.9	1576.2	1573.4
127.5°	1687.0	1716.8	1706.2	1694.7	1687.0
130°	1797.7	1832.3	1827.6	1821.7	1811.2
132.5°	1921.9	1948.8	1950.8	1937.3	1929.6
135°	2028.7	2058.6	2064.4	2061.5	2053.8
137.5°	2148.2	2172.2	2177.1	2175.1	2163.5
140°	2253.1	2277.1	2290.7	2290.7	2280.1
142.5°	2361.0	2385.0	2392.7	2395.6	2385.0
145°	2463.0	2482.2	2497.7	2500.5	2489.9
147.5°	2554.5	2578.6	2590.1	2595.0	2584.3
150°	2648.9	2665.2	2675.8	2684.4	2675.8
152.5°	2732.6	2749.0	2762.5	2773.1	2762.5
155°	2816.4	2824.1	2832.8	2846.2	2837.5
157.5°	2888.6	2894.4	2899.2	2918.4	2905.0
160°	2953.1	2958.9	2961.7	2978.1	2966.6
162.5°	3012.8	3012.8	3015.7	3033.9	3020.5
165°	3063.8	3060.9	3060.9	3080.2	3066.8
167.5°	3110.1	3101.4	3101.4	3120.7	3107.2
170°	3144.7	3137.0	3134.1	3153.4	3137.0
172.5°	3168.8	3161.1	3158.2	3177.4	3161.1
175°	3188.0	3180.4	3174.6	3193.8	3177.4
177.5°	3198.6	3191.0	3185.1	3201.5	3185.1
180°	3193.8	3193.8	3193.8	3193.8	3193.8



TEST NUMBER: P909274
 CATALOG NUMBER: DFN2DIP-SQ3F0-090D100US840-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.84	12.64	12.83	13.64	14.97	7.80	8.60	8.79	9.60	10.93
	3H	13.51	14.23	14.51	15.24	16.58	8.98	9.70	9.98	10.71	12.05
	4H	14.11	14.79	15.13	15.80	17.16	9.42	10.10	10.44	11.11	12.47
	6H	14.53	15.15	15.56	16.17	17.54	9.74	10.36	10.76	11.38	12.74
	8H	14.65	15.25	15.69	16.28	17.64	9.82	10.42	10.86	11.45	12.81
	12H	14.71	15.28	15.75	16.30	17.69	9.86	10.43	10.90	11.45	12.84
4H	2H	11.85	12.53	12.87	13.54	14.90	8.39	9.07	9.41	10.08	11.43
	3H	13.67	14.24	14.70	15.28	16.64	9.73	10.29	10.76	11.33	12.70
	4H	14.36	14.88	15.40	15.91	17.30	10.27	10.79	11.31	11.82	13.21
	6H	14.87	15.31	15.92	16.37	17.75	10.68	11.12	11.73	12.18	13.57
	8H	15.04	15.45	16.09	16.50	17.90	10.81	11.22	11.85	12.27	13.67
	12H	15.13	15.50	16.20	16.57	17.97	10.86	11.24	11.93	12.30	13.71
8H	4H	14.32	14.74	15.37	15.79	17.19	10.54	10.96	11.59	12.01	13.41
	6H	14.88	15.22	15.96	16.32	17.71	11.05	11.39	12.13	12.49	13.88
	8H	15.10	15.40	16.18	16.47	17.89	11.24	11.54	12.32	12.62	14.03
	12H	15.23	15.49	16.31	16.56	18.02	11.35	11.62	12.43	12.69	14.14
12H	4H	14.27	14.65	15.34	15.71	17.12	10.55	10.92	11.61	11.98	13.39
	6H	14.86	15.16	15.94	16.23	17.65	11.10	11.40	12.18	12.48	13.89
	8H	15.07	15.34	16.16	16.41	17.87	11.31	11.57	12.39	12.64	14.10