

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P909334

Luminaire Tested: DFN2DIP-SQ3F0-110D070US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P909334
REPORT IS A COMBINATION OF REPORTS P899930 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-110D070US840-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15698.4 lumens
Efficiency: N/A
Efficacy: 95.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 164.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P909334

CATALOG NUMBER: DFN2DIP-SQ3F0-110D070US840-RLLFLL

Luminous Intensity Polar Plot

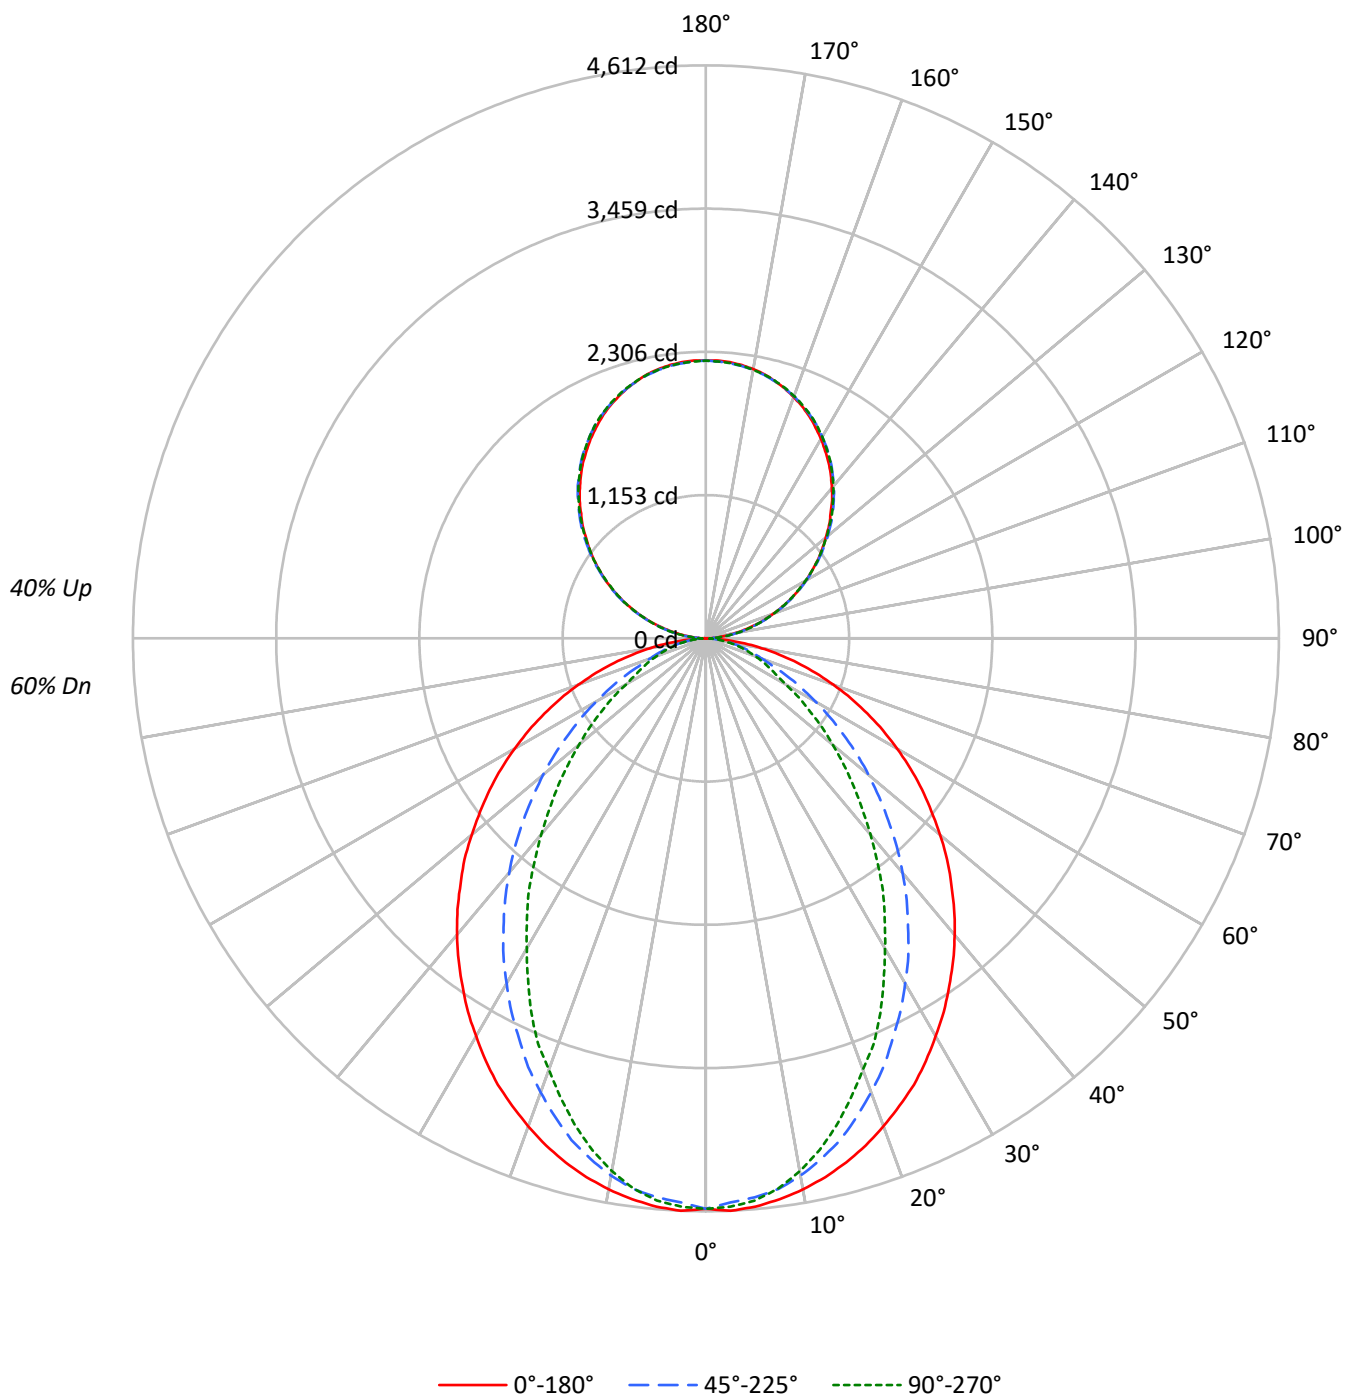

TEST NUMBER: P909334

CATALOG NUMBER: DFN2DIP-SQ3F0-110D070US840-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65
1	101	96	93	89	94	90	87	84	79	77	74	68	67	65	59	58	56
2	92	85	79	74	86	80	74	70	70	66	63	61	58	55	52	50	48
3	84	75	68	62	79	71	64	59	62	57	53	54	51	47	47	44	42
4	78	67	59	53	72	63	56	51	56	50	46	49	45	41	42	39	37
5	71	60	52	46	67	57	49	44	50	44	40	44	40	36	38	35	32
6	66	54	46	40	62	51	44	39	45	40	35	40	36	32	35	32	29
7	61	49	41	36	57	46	39	34	41	36	31	37	32	29	32	29	26
8	57	45	37	32	53	42	36	31	38	32	28	34	29	26	30	26	23
9	53	41	34	29	50	39	32	28	35	29	25	31	27	23	28	24	21
10	50	38	31	26	47	36	29	25	32	27	23	29	24	21	26	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5261	5261	5261
5°	5266	5174	5209
10°	5210	5069	5037
15°	5135	4898	4774
20°	5037	4664	4451
25°	4936	4402	4139
30°	4802	4133	3744
35°	4671	3845	3398
40°	4537	3548	3000
45°	4382	3218	2640
50°	4220	2886	2289
55°	4052	2530	1951
60°	3857	2160	1604
65°	3632	1784	1442
70°	3360	1432	1302
75°	3017	1255	1181
80°	2521	1042	1019
85°	1709	679	756

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 4382 cd/sqm

TEST NUMBER: P909334

CATALOG NUMBER: DFN2DIP-SQ3F0-110D070US840-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	430.3	2.7
10°-20°	1181.2	7.5
20°-30°	1658.4	10.6
30°-40°	1807.8	11.5
40°-50°	1661.5	10.6
50°-60°	1304.9	8.3
60°-70°	849.4	5.4
70°-80°	437.2	2.8
80°-90°	118.0	0.8
90°-100°	138.3	0.9
100°-110°	439.6	2.8
110°-120°	752.2	4.8
120°-130°	989.3	6.3
130°-140°	1110.5	7.1
140°-150°	1088.9	6.9
150°-160°	913.5	5.8
160°-170°	605.8	3.9
170°-180°	211.7	1.3
0°-30°	3269.9	20.8
0°-40°	5077.7	32.3
0°-60°	8044.1	51.2
0°-90°	9448.6	60.2
90°-120°	1330.1	8.5
90°-150°	4518.8	28.8
90°-180°	6250.0	39.8
0°-180°	15698.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4591	4591	4591	4591	4591	
5°	4591	4570	4516	4554	4541	435
15°	4367	4321	4180	4101	4060	1231
25°	3964	3831	3556	3386	3324	1823
35°	3416	3203	2838	2576	2484	2138
45°	2792	2514	2078	1782	1683	2156
55°	2123	1799	1350	1101	1022	1897
65°	1434	1097	723	582	569	1421
75°	764	473	332	303	299	808
85°	178	91	79	79	79	205
90°	2	24	66	62	64	15
95°	98	117	121	121	117	109
105°	406	411	415	419	419	428
115°	755	766	762	760	755	747
125°	1098	1115	1109	1103	1101	981
135°	1420	1441	1445	1443	1438	1098
145°	1724	1738	1748	1750	1743	1077
155°	1972	1977	1983	1992	1986	907
165°	2145	2143	2143	2156	2147	605
175°	2232	2226	2222	2236	2224	212
180°	2236	2236	2236	2236	2236	

TEST NUMBER: P909334

CATALOG NUMBER: DFN2DIP-SQ3F0-110D070US840-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4591.2	4591.2	4591.2	4591.2	4591.2
2.5°	4611.9	4591.2	4545.3	4587.2	4578.8
5°	4591.2	4570.4	4516.2	4553.7	4541.4
7.5°	4553.7	4528.9	4470.8	4487.1	4466.3
10°	4503.9	4474.7	4391.9	4379.1	4354.4
12.5°	4441.7	4404.2	4291.8	4267.1	4221.2
15°	4366.8	4320.9	4179.8	4101.0	4059.5
17.5°	4279.5	4213.0	4038.4	3947.1	3880.5
20°	4179.8	4096.5	3888.9	3785.3	3693.6
22.5°	4071.9	3976.1	3735.1	3594.0	3531.8
25°	3963.8	3830.7	3556.5	3386.4	3323.8
27.5°	3835.2	3693.6	3390.3	3195.0	3099.4
30°	3698.0	3539.8	3207.4	2995.8	2883.4
32.5°	3564.9	3373.6	3033.2	2783.8	2679.8
35°	3415.5	3203.4	2838.0	2576.2	2484.5
37.5°	3270.0	3041.2	2655.0	2368.0	2264.5
40°	3116.1	2867.1	2463.8	2168.8	2060.8
42.5°	2958.3	2692.5	2272.9	1965.2	1861.6
45°	2792.2	2513.6	2077.6	1782.2	1682.6
47.5°	2634.3	2339.5	1890.7	1595.3	1504.1
50°	2459.7	2164.8	1707.8	1420.8	1333.9
52.5°	2289.2	1977.5	1533.2	1259.0	1180.0
55°	2122.9	1799.0	1350.2	1101.2	1022.3
57.5°	1952.9	1620.4	1188.4	955.7	889.1
60°	1778.3	1445.9	1017.8	806.3	739.7
62.5°	1608.1	1275.8	872.4	673.2	640.1
65°	1433.5	1096.7	723.0	581.9	569.1
67.5°	1267.4	930.6	581.9	510.9	498.6
70°	1092.8	768.8	481.8	440.4	423.6
72.5°	926.6	618.9	402.9	369.8	361.4
75°	764.4	473.4	332.3	303.3	299.3
77.5°	602.6	336.4	261.9	245.1	236.7
80°	452.7	241.2	199.2	183.0	183.0
82.5°	315.6	162.2	137.1	128.8	128.8
85°	178.5	91.3	78.9	78.9	78.9
87.5°	66.6	33.0	33.0	29.1	29.1
90°	2.0	24.2	66.0	62.0	64.0
92.5°	41.8	56.7	58.7	60.7	60.7
95°	98.4	117.2	120.7	120.7	117.2
97.5°	163.8	181.3	188.7	188.7	188.7
100°	239.2	254.8	260.1	260.1	258.1
102.5°	318.8	330.2	337.7	339.7	337.7
105°	405.8	411.1	415.2	418.6	418.6
107.5°	492.0	500.1	500.1	501.5	492.0
110°	575.6	586.4	586.4	586.4	581.0

TEST NUMBER: P909334

CATALOG NUMBER: DFN2DIP-SQ3F0-110D070US840-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	665.9	677.4	675.4	669.9	665.9
115°	754.9	765.7	762.3	760.3	754.9
117.5°	843.1	858.0	848.6	843.1	837.8
120°	932.1	947.0	932.1	932.1	926.0
122.5°	1013.0	1031.9	1022.5	1017.0	1013.0
125°	1097.9	1114.8	1109.4	1103.4	1101.4
127.5°	1180.8	1201.7	1194.4	1186.3	1180.8
130°	1258.4	1282.6	1279.3	1275.3	1267.8
132.5°	1345.3	1364.2	1365.5	1356.1	1350.7
135°	1420.2	1441.0	1445.1	1443.0	1437.6
137.5°	1503.7	1520.6	1523.9	1522.6	1514.5
140°	1577.2	1594.1	1603.5	1603.5	1596.1
142.5°	1652.6	1669.5	1674.9	1676.9	1669.5
145°	1724.1	1737.6	1748.4	1750.4	1743.0
147.5°	1788.2	1805.0	1813.1	1816.4	1809.1
150°	1854.2	1865.6	1873.1	1879.2	1873.1
152.5°	1912.8	1924.3	1933.7	1941.2	1933.7
155°	1971.5	1976.8	1983.0	1992.4	1986.3
157.5°	2022.1	2026.1	2029.4	2043.0	2033.5
160°	2067.2	2071.2	2073.3	2084.7	2076.6
162.5°	2109.0	2109.0	2111.0	2123.7	2114.4
165°	2144.7	2142.6	2142.6	2156.2	2146.7
167.5°	2177.1	2171.0	2171.0	2184.4	2175.0
170°	2201.3	2196.0	2193.9	2207.4	2196.0
172.5°	2218.2	2212.7	2210.7	2224.2	2212.7
175°	2231.6	2226.2	2222.2	2235.6	2224.2
177.5°	2239.1	2233.6	2229.6	2241.1	2229.6
180°	2235.6	2235.6	2235.6	2235.6	2235.6

TEST NUMBER: P909334

CATALOG NUMBER: DFN2DIP-SQ3F0-110D070US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.78	14.70	14.65	15.59	16.71	9.74	10.66	10.61	11.55	12.67
	3H	15.46	16.29	16.35	17.18	18.33	10.93	11.76	11.82	12.65	13.80
	4H	16.07	16.85	16.97	17.75	18.91	11.38	12.16	12.28	13.06	14.22
	6H	16.49	17.21	17.41	18.12	19.29	11.70	12.42	12.61	13.33	14.50
	8H	16.62	17.30	17.54	18.23	19.40	11.79	12.47	12.71	13.40	14.57
	12H	16.68	17.33	17.61	18.25	19.45	11.83	12.48	12.76	13.40	14.60
4H	2H	13.81	14.59	14.71	15.49	16.65	10.35	11.12	11.25	12.03	13.18
	3H	15.64	16.29	16.56	17.22	18.39	11.70	12.34	12.61	13.28	14.45
	4H	16.33	16.92	17.26	17.85	19.05	12.24	12.83	13.17	13.76	14.96
	6H	16.85	17.36	17.79	18.31	19.51	12.66	13.17	13.60	14.12	15.32
	8H	17.02	17.50	17.97	18.44	19.65	12.79	13.26	13.73	14.21	15.42
	12H	17.12	17.55	18.08	18.51	19.73	12.85	13.28	13.81	14.24	15.46
8H	4H	16.31	16.78	17.25	17.73	18.94	12.53	13.00	13.47	13.95	15.16
	6H	16.87	17.26	17.84	18.25	19.46	13.04	13.43	14.01	14.42	15.63
	8H	17.08	17.43	18.06	18.41	19.64	13.23	13.57	14.20	14.55	15.78
	12H	17.22	17.53	18.20	18.50	19.78	13.35	13.65	14.32	14.62	15.90
12H	4H	16.26	16.69	17.22	17.65	18.87	12.54	12.96	13.50	13.93	15.14
	6H	16.85	17.19	17.82	18.17	19.40	13.09	13.43	14.07	14.41	15.64
	8H	17.07	17.37	18.05	18.34	19.62	13.30	13.60	14.28	14.57	15.85