

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P909354

Luminaire Tested: DFN2DIP-SQ3F0-110D120US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P909354
REPORT IS A COMBINATION OF REPORTS P900020 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-110D120US840-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 20167.0 lumens
Efficiency: N/A
Efficacy: 97.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 206
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P909354
CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US840-RLLFLL

Luminous Intensity Polar Plot

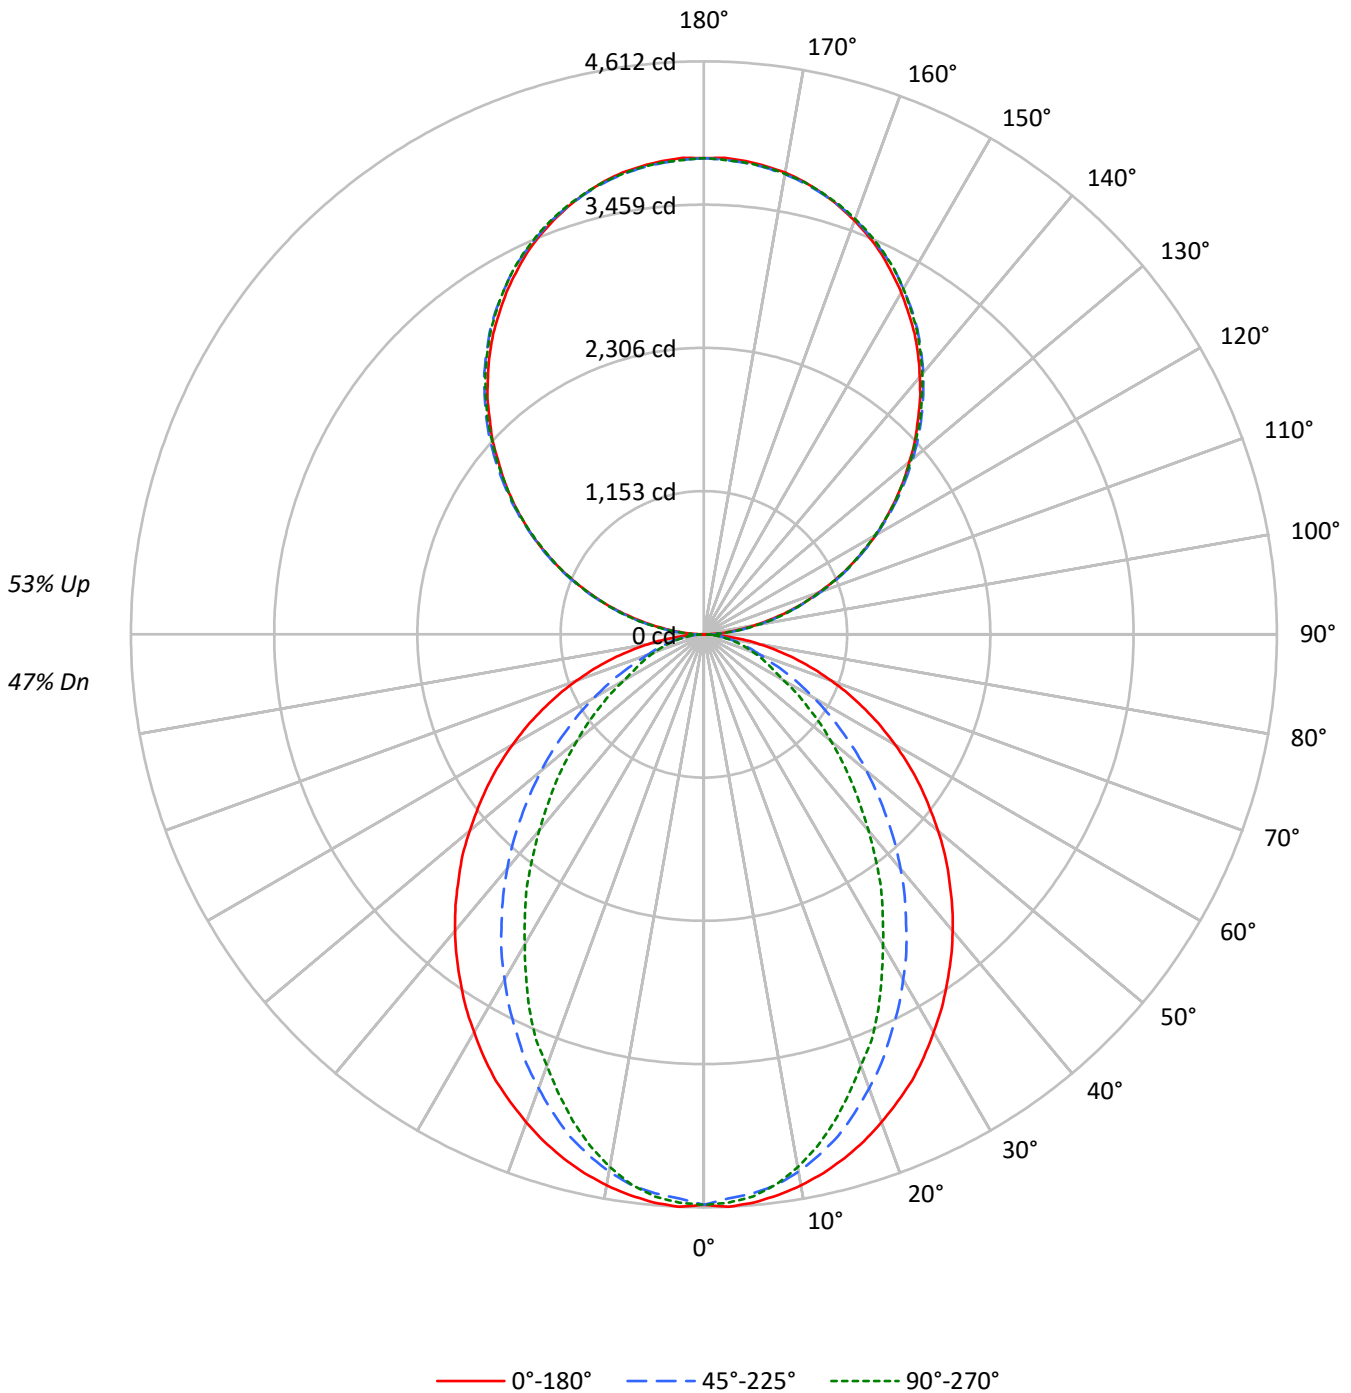



TEST NUMBER: P909354

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US840-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	53	53	53	47	47	47	47
1	98	93	90	86	90	86	83	80	72	70	68	59	58	57	48	47	46	40	40	40	40
2	89	82	76	71	82	76	71	66	64	60	57	53	50	48	43	41	39	35	35	35	35
3	82	73	65	60	75	67	61	56	57	52	48	47	44	41	38	36	34	30	30	30	30
4	75	64	57	51	69	60	53	48	51	46	42	42	39	36	34	32	30	26	26	26	26
5	69	58	50	44	63	53	47	41	45	40	36	38	34	31	31	28	26	23	23	23	23
6	64	52	44	38	58	48	41	36	41	36	32	35	31	27	28	26	23	20	20	20	20
7	59	47	39	34	54	44	37	32	37	32	28	32	27	24	26	23	21	18	18	18	18
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19	16	16	16	16
9	51	39	32	27	47	36	30	25	31	26	23	27	23	20	22	19	17	15	15	15	15
10	48	36	29	24	44	34	27	23	29	24	20	25	21	18	21	18	16	14	14	14	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5261	5261	5261
5°	5266	5174	5209
10°	5210	5069	5037
15°	5135	4898	4774
20°	5037	4664	4451
25°	4936	4402	4139
30°	4802	4133	3744
35°	4671	3845	3398
40°	4537	3548	3000
45°	4382	3218	2640
50°	4220	2886	2289
55°	4052	2530	1951
60°	3857	2160	1604
65°	3632	1784	1442
70°	3360	1432	1302
75°	3017	1255	1181
80°	2521	1042	1019
85°	1709	679	756

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4382 cd/sqm



TEST NUMBER: P909354

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US840-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	430.3	2.1
10°-20°	1181.2	5.9
20°-30°	1658.4	8.2
30°-40°	1807.8	9.0
40°-50°	1661.5	8.2
50°-60°	1304.9	6.5
60°-70°	849.4	4.2
70°-80°	437.2	2.2
80°-90°	122.5	0.6
90°-100°	237.2	1.2
100°-110°	753.5	3.7
110°-120°	1289.5	6.4
120°-130°	1696.0	8.4
130°-140°	1903.6	9.4
140°-150°	1866.7	9.3
150°-160°	1565.9	7.8
160°-170°	1038.5	5.1
170°-180°	363.0	1.8
0°-30°	3269.9	16.2
0°-40°	5077.7	25.2
0°-60°	8044.1	39.9
0°-90°	9453.1	46.9
90°-120°	2280.2	11.3
90°-150°	7746.5	38.4
90°-180°	10714.0	53.1
0°-180°	20167.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4591	4591	4591	4591	4591	
5°	4591	4570	4516	4554	4541	435
15°	4367	4321	4180	4101	4060	1231
25°	3964	3831	3556	3386	3324	1823
35°	3416	3203	2838	2576	2484	2138
45°	2792	2514	2078	1782	1683	2156
55°	2123	1799	1350	1101	1022	1897
65°	1434	1097	723	582	569	1421
75°	764	473	332	303	299	808
85°	178	91	79	79	79	205
90°	3	42	113	106	110	20
95°	169	201	207	207	201	188
105°	696	705	712	718	718	734
115°	1294	1313	1307	1303	1294	1280
125°	1882	1911	1902	1892	1888	1682
135°	2434	2470	2477	2474	2465	1882
145°	2956	2979	2997	3001	2988	1847
155°	3380	3389	3399	3416	3405	1556
165°	3677	3673	3673	3696	3680	1037
175°	3826	3816	3810	3832	3813	363
180°	3832	3832	3832	3832	3832	



TEST NUMBER: P909354

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US840-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4591.2	4591.2	4591.2	4591.2	4591.2
2.5°	4611.9	4591.2	4545.3	4587.2	4578.8
5°	4591.2	4570.4	4516.2	4553.7	4541.4
7.5°	4553.7	4528.9	4470.8	4487.1	4466.3
10°	4503.9	4474.7	4391.9	4379.1	4354.4
12.5°	4441.7	4404.2	4291.8	4267.1	4221.2
15°	4366.8	4320.9	4179.8	4101.0	4059.5
17.5°	4279.5	4213.0	4038.4	3947.1	3880.5
20°	4179.8	4096.5	3888.9	3785.3	3693.6
22.5°	4071.9	3976.1	3735.1	3594.0	3531.8
25°	3963.8	3830.7	3556.5	3386.4	3323.8
27.5°	3835.2	3693.6	3390.3	3195.0	3099.4
30°	3698.0	3539.8	3207.4	2995.8	2883.4
32.5°	3564.9	3373.6	3033.2	2783.8	2679.8
35°	3415.5	3203.4	2838.0	2576.2	2484.5
37.5°	3270.0	3041.2	2655.0	2368.0	2264.5
40°	3116.1	2867.1	2463.8	2168.8	2060.8
42.5°	2958.3	2692.5	2272.9	1965.2	1861.6
45°	2792.2	2513.6	2077.6	1782.2	1682.6
47.5°	2634.3	2339.5	1890.7	1595.3	1504.1
50°	2459.7	2164.8	1707.8	1420.8	1333.9
52.5°	2289.2	1977.5	1533.2	1259.0	1180.0
55°	2122.9	1799.0	1350.2	1101.2	1022.3
57.5°	1952.9	1620.4	1188.4	955.7	889.1
60°	1778.3	1445.9	1017.8	806.3	739.7
62.5°	1608.1	1275.8	872.4	673.2	640.1
65°	1433.5	1096.7	723.0	581.9	569.1
67.5°	1267.4	930.6	581.9	510.9	498.6
70°	1092.8	768.8	481.8	440.4	423.6
72.5°	926.6	618.9	402.9	369.8	361.4
75°	764.4	473.4	332.3	303.3	299.3
77.5°	602.6	336.4	261.9	245.1	236.7
80°	452.7	241.2	199.2	183.0	183.0
82.5°	315.6	162.2	137.1	128.8	128.8
85°	178.5	91.3	78.9	78.9	78.9
87.5°	66.6	33.0	33.0	29.1	29.1
90°	3.4	41.6	113.2	106.3	109.8
92.5°	71.6	97.0	100.5	104.0	104.0
95°	168.6	201.1	206.8	206.8	201.1
97.5°	280.7	310.8	323.6	323.6	323.6
100°	410.2	436.8	446.0	446.0	442.5
102.5°	546.5	566.1	578.9	582.4	578.9
105°	695.6	704.8	711.8	717.5	717.5
107.5°	843.4	857.4	857.4	859.6	843.4
110°	986.7	1005.2	1005.2	1005.2	996.0



TEST NUMBER: P909354

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US840-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1141.6	1161.2	1157.7	1148.5	1141.6
115°	1294.0	1312.6	1306.8	1303.3	1294.0
117.5°	1445.4	1470.9	1454.7	1445.4	1436.2
120°	1598.0	1623.4	1598.0	1598.0	1587.6
122.5°	1736.7	1769.0	1752.8	1743.5	1736.7
125°	1882.2	1911.1	1901.9	1891.5	1887.9
127.5°	2024.4	2060.1	2047.4	2033.6	2024.4
130°	2157.2	2198.8	2193.0	2186.1	2173.3
132.5°	2306.2	2338.6	2340.9	2324.7	2315.5
135°	2434.5	2470.3	2477.3	2473.8	2464.6
137.5°	2577.8	2606.7	2612.4	2610.1	2596.3
140°	2703.7	2732.6	2748.8	2748.8	2736.0
142.5°	2833.2	2862.1	2871.2	2874.7	2862.1
145°	2955.6	2978.7	2997.2	3000.7	2988.0
147.5°	3065.3	3094.2	3108.2	3113.9	3101.2
150°	3178.7	3198.2	3211.0	3221.4	3211.0
152.5°	3279.1	3298.7	3315.0	3327.7	3315.0
155°	3379.6	3388.9	3399.3	3415.5	3405.1
157.5°	3466.4	3473.2	3479.0	3502.1	3486.0
160°	3543.7	3550.7	3554.1	3573.8	3559.9
162.5°	3615.3	3615.3	3618.9	3640.8	3624.6
165°	3676.6	3673.2	3673.2	3696.2	3680.1
167.5°	3732.1	3721.7	3721.7	3744.8	3728.6
170°	3773.7	3764.4	3760.9	3784.1	3764.4
172.5°	3802.5	3793.3	3789.8	3812.9	3793.3
175°	3825.7	3816.4	3809.5	3832.5	3812.9
177.5°	3838.4	3829.1	3822.1	3841.8	3822.1
180°	3832.5	3832.5	3832.5	3832.5	3832.5



TEST NUMBER: P909354
 CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.58	13.39	13.57	14.38	15.70	8.54	9.35	9.53	10.34	11.66
	3H	14.25	14.97	15.25	15.98	17.32	9.72	10.44	10.72	11.45	12.79
	4H	14.86	15.54	15.87	16.55	17.89	10.17	10.85	11.18	11.86	13.20
	6H	15.27	15.90	16.30	16.91	18.27	10.48	11.11	11.50	12.12	13.48
	8H	15.40	15.99	16.43	17.02	18.38	10.57	11.16	11.60	12.19	13.55
	12H	15.45	16.02	16.49	17.05	18.42	10.61	11.17	11.64	12.20	13.58
4H	2H	12.59	13.27	13.61	14.28	15.63	9.13	9.81	10.15	10.82	12.17
	3H	14.41	14.98	15.44	16.02	17.38	10.47	11.04	11.50	12.08	13.44
	4H	15.10	15.62	16.14	16.65	18.03	11.01	11.53	12.05	12.56	13.94
	6H	15.61	16.06	16.66	17.11	18.49	11.42	11.87	12.47	12.92	14.30
	8H	15.78	16.20	16.83	17.25	18.64	11.55	11.96	12.59	13.01	14.40
	12H	15.87	16.25	16.94	17.31	18.71	11.61	11.98	12.67	13.04	14.44
8H	4H	15.07	15.48	16.11	16.53	17.92	11.29	11.70	12.33	12.75	14.14
	6H	15.63	15.97	16.70	17.06	18.45	11.80	12.14	12.87	13.23	14.62
	8H	15.84	16.14	16.92	17.21	18.62	11.98	12.28	13.06	13.36	14.77
	12H	15.97	16.24	17.05	17.31	18.76	12.10	12.36	13.18	13.43	14.88
12H	4H	15.02	15.39	16.08	16.45	17.85	11.29	11.67	12.36	12.73	14.13
	6H	15.60	15.90	16.68	16.98	18.39	11.84	12.15	12.92	13.22	14.63
	8H	15.82	16.08	16.90	17.15	18.60	12.05	12.31	13.13	13.38	14.83