

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911838

Luminaire Tested: DFN2DIP-SQ3F0-050D050US850-RLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P911838  
REPORT IS A COMBINATION OF REPORTS P899882 AND P896733  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ3F0-050D050US850-RLLFLL  
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9620.6 lumens  
Efficiency: N/A  
Efficacy: 121.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 79.1  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9789  
Total Harmonic Distortion (THDi): 0.074  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P911838  
CATALOG NUMBER: DFN2DIP-SQ3F0-050D050US850-RLFL

### Luminous Intensity Polar Plot

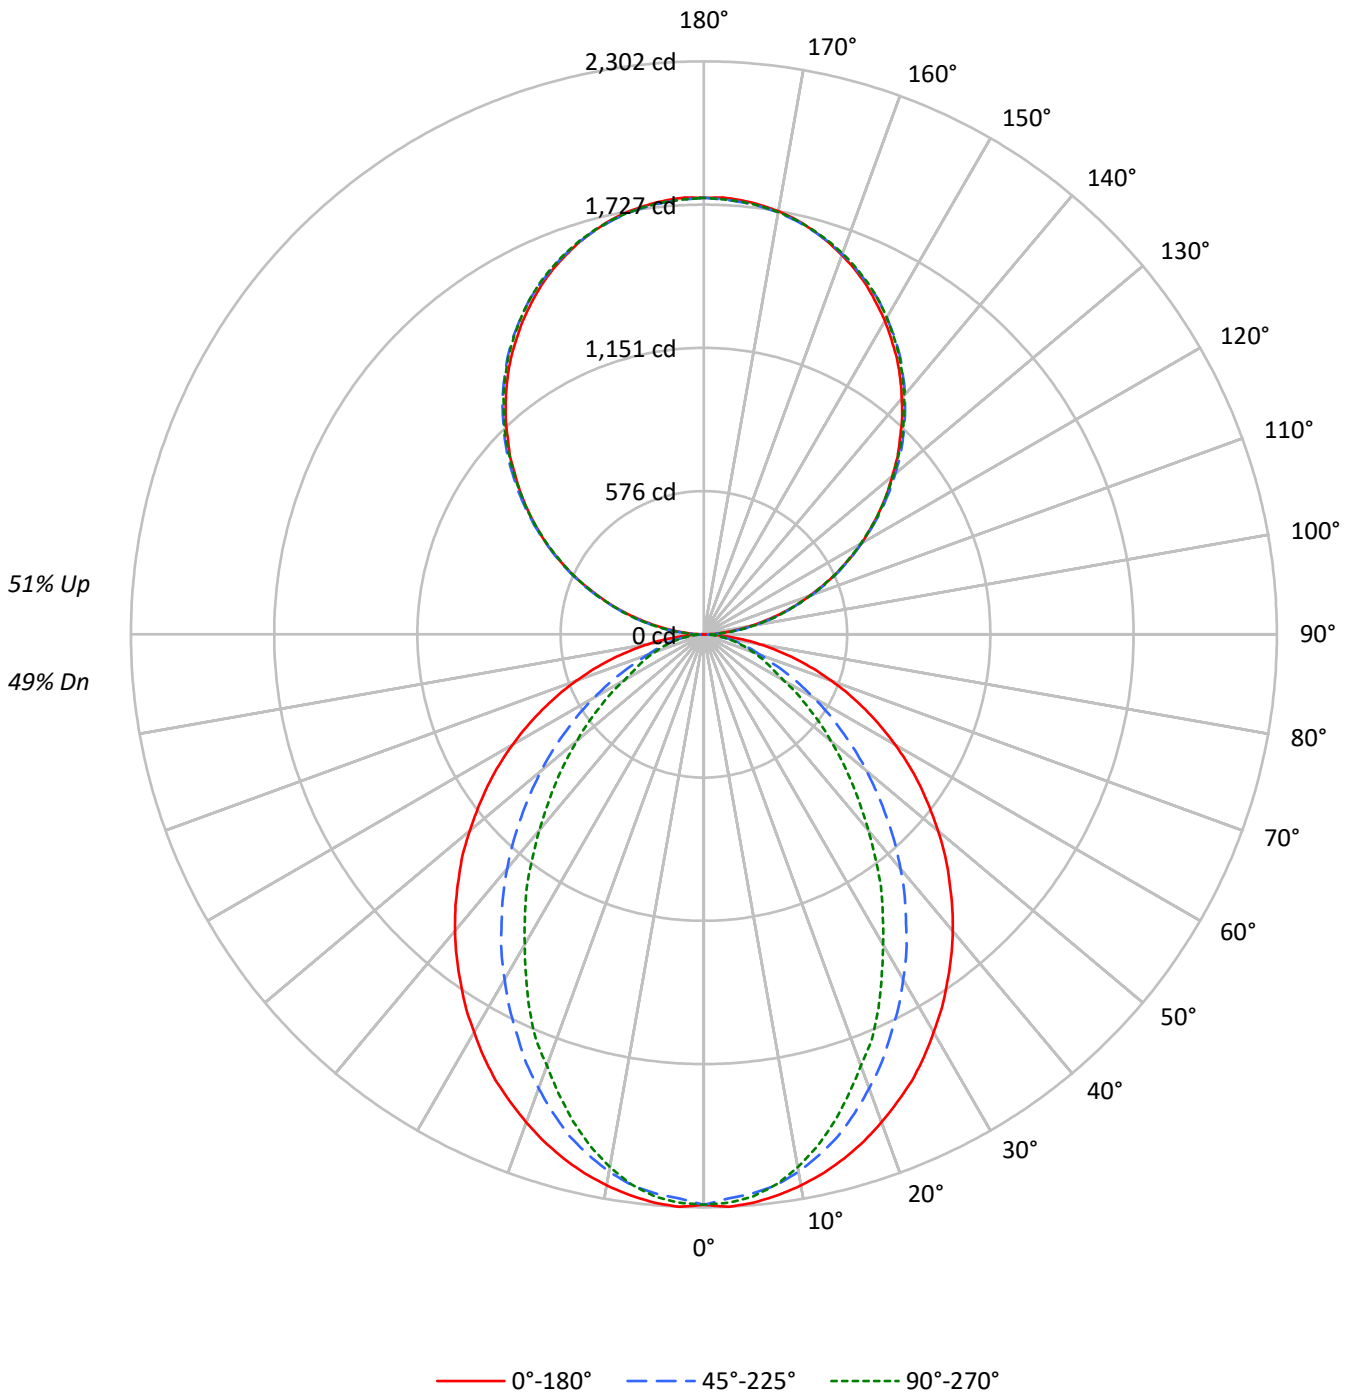



TEST NUMBER: P911838

CATALOG NUMBER: DFN2DIP-SQ3F0-050D050US850-RLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55	49			49
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48	42			42
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41	36			36
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35	31			31
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31	27			27
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27	24			24
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24	21			21
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22	19			19
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20	17			17
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18	16			16
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16	14			14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2626	2626	2626
5°	2628	2583	2600
10°	2601	2530	2514
15°	2563	2445	2383
20°	2514	2328	2222
25°	2464	2197	2066
30°	2397	2063	1869
35°	2331	1919	1696
40°	2265	1771	1498
45°	2187	1606	1318
50°	2107	1440	1142
55°	2023	1263	974
60°	1925	1078	801
65°	1813	890	720
70°	1677	715	650
75°	1506	627	590
80°	1258	520	508
85°	854	339	377

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2187 cd/sqm



TEST NUMBER: P911838

CATALOG NUMBER: DFN2DIP-SQ3F0-050D050US850-RLFL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	214.8	2.2
10°-20°	589.6	6.1
20°-30°	827.8	8.6
30°-40°	902.4	9.4
40°-50°	829.4	8.6
50°-60°	651.3	6.8
60°-70°	424.0	4.4
70°-80°	218.2	2.3
80°-90°	60.7	0.6
90°-100°	108.5	1.1
100°-110°	344.8	3.6
110°-120°	590.1	6.1
120°-130°	776.0	8.1
130°-140°	871.0	9.1
140°-150°	854.2	8.9
150°-160°	716.5	7.4
160°-170°	475.2	4.9
170°-180°	166.1	1.7
0°-30°	1632.2	17.0
0°-40°	2534.6	26.3
0°-60°	4015.3	41.7
0°-90°	4718.3	49.0
90°-120°	1043.4	10.8
90°-150°	3544.6	36.8
90°-180°	4902.0	51.0
0°-180°	9620.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2292	2292	2292	2292	2292	
5°	2292	2281	2254	2273	2267	217
15°	2180	2157	2086	2047	2026	614
25°	1979	1912	1775	1690	1659	910
35°	1705	1599	1417	1286	1240	1067
45°	1394	1255	1037	890	840	1076
55°	1060	898	674	550	510	947
65°	716	548	361	290	284	709
75°	382	236	166	151	149	404
85°	89	46	39	39	39	102
90°	2	19	52	49	50	9
95°	77	92	95	95	92	86
105°	318	322	326	328	328	336
115°	592	601	598	596	592	586
125°	861	874	870	866	864	770
135°	1114	1130	1134	1132	1128	861
145°	1352	1363	1371	1373	1367	845
155°	1546	1551	1555	1563	1558	712
165°	1682	1681	1681	1691	1684	475
175°	1751	1746	1743	1754	1745	166
180°	1754	1754	1754	1754	1754	



TEST NUMBER: P911838

CATALOG NUMBER: DFN2DIP-SQ3F0-050D050US850-RLFL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2291.7	2291.7	2291.7	2291.7	2291.7
2.5°	2302.1	2291.7	2268.9	2289.8	2285.5
5°	2291.7	2281.4	2254.4	2273.0	2266.9
7.5°	2273.0	2260.7	2231.6	2239.8	2229.4
10°	2248.2	2233.6	2192.3	2185.9	2173.5
12.5°	2217.1	2198.5	2142.4	2130.1	2107.1
15°	2179.7	2156.9	2086.5	2047.1	2026.4
17.5°	2136.2	2103.0	2015.8	1970.2	1937.0
20°	2086.5	2044.9	1941.2	1889.5	1843.7
22.5°	2032.6	1984.8	1864.5	1794.0	1763.0
25°	1978.6	1912.1	1775.3	1690.3	1659.1
27.5°	1914.4	1843.7	1692.3	1594.9	1547.2
30°	1845.9	1767.0	1601.1	1495.4	1439.3
32.5°	1779.5	1684.0	1514.1	1389.6	1337.7
35°	1704.9	1599.1	1416.6	1285.9	1240.2
37.5°	1632.2	1518.1	1325.4	1182.1	1130.4
40°	1555.5	1431.2	1229.8	1082.6	1028.7
42.5°	1476.7	1344.0	1134.5	980.9	929.2
45°	1393.8	1254.7	1037.0	889.6	839.8
47.5°	1314.9	1167.8	943.8	796.4	750.8
50°	1227.9	1080.6	852.5	709.2	665.8
52.5°	1142.7	987.1	765.3	628.5	589.1
55°	1059.8	898.0	673.9	549.6	510.3
57.5°	974.8	808.9	593.2	477.1	443.8
60°	887.6	721.7	508.0	402.5	369.2
62.5°	802.7	636.8	435.5	336.0	319.5
65°	715.5	547.5	360.9	290.4	284.1
67.5°	632.6	464.6	290.4	255.1	248.9
70°	545.5	383.7	240.5	219.8	211.5
72.5°	462.6	309.0	201.2	184.6	180.4
75°	381.6	236.3	165.9	151.4	149.4
77.5°	300.8	167.9	130.8	122.3	118.1
80°	226.0	120.3	99.5	91.3	91.3
82.5°	157.6	81.0	68.4	64.2	64.2
85°	89.2	45.6	39.4	39.4	39.4
87.5°	33.3	16.5	16.5	14.5	14.5
90°	1.6	19.1	51.8	48.7	50.2
92.5°	32.8	44.4	46.0	47.6	47.6
95°	77.2	92.0	94.6	94.6	92.0
97.5°	128.4	142.2	148.1	148.1	148.1
100°	187.6	199.8	204.1	204.1	202.5
102.5°	250.1	259.1	264.8	266.5	264.8
105°	318.3	322.5	325.7	328.3	328.3
107.5°	385.9	392.3	392.3	393.4	385.9
110°	451.5	460.0	460.0	460.0	455.7



TEST NUMBER: P911838

CATALOG NUMBER: DFN2DIP-SQ3F0-050D050US850-RLFL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	522.3	531.3	529.8	525.6	522.3
115°	592.1	600.6	598.0	596.4	592.1
117.5°	661.4	673.1	665.6	661.4	657.2
120°	731.2	742.8	731.2	731.2	726.4
122.5°	794.6	809.5	802.0	797.8	794.6
125°	861.2	874.4	870.2	865.5	863.9
127.5°	926.2	942.6	936.9	930.5	926.2
130°	987.1	1006.1	1003.4	1000.3	994.4
132.5°	1055.3	1070.1	1071.2	1063.8	1059.5
135°	1114.0	1130.3	1133.5	1132.0	1127.7
137.5°	1179.5	1192.7	1195.4	1194.3	1188.0
140°	1237.1	1250.4	1257.7	1257.7	1252.0
142.5°	1296.3	1309.6	1313.8	1315.4	1309.6
145°	1352.4	1363.0	1371.4	1373.1	1367.2
147.5°	1402.7	1415.9	1422.2	1424.8	1419.0
150°	1454.5	1463.4	1469.2	1474.0	1469.2
152.5°	1500.5	1509.5	1516.8	1522.7	1516.8
155°	1546.4	1550.6	1555.4	1562.8	1558.0
157.5°	1586.1	1589.2	1591.9	1602.5	1595.1
160°	1621.5	1624.7	1626.2	1635.2	1628.9
162.5°	1654.3	1654.3	1655.8	1665.9	1658.5
165°	1682.4	1680.7	1680.7	1691.3	1683.9
167.5°	1707.6	1702.9	1702.9	1713.5	1706.1
170°	1726.7	1722.5	1720.9	1731.5	1722.5
172.5°	1739.9	1735.7	1734.1	1744.7	1735.7
175°	1750.6	1746.2	1743.1	1753.7	1744.7
177.5°	1756.3	1752.1	1748.9	1757.9	1748.9
180°	1753.7	1753.7	1753.7	1753.7	1753.7



TEST NUMBER: P911838  
 CATALOG NUMBER: DFN2DIP-SQ3F0-050D050US850-RLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.38	11.20	11.35	12.18	13.47	6.34	7.16	7.31	8.14	9.43
	3H	12.05	12.78	13.03	13.77	15.08	7.52	8.25	8.50	9.24	10.55
	4H	12.65	13.35	13.65	14.34	15.66	7.96	8.66	8.96	9.65	10.97
	6H	13.07	13.71	14.08	14.71	16.04	8.28	8.92	9.28	9.92	11.25
	8H	13.19	13.80	14.21	14.82	16.15	8.37	8.97	9.38	9.99	11.32
	12H	13.25	13.83	14.27	14.84	16.19	8.41	8.98	9.42	9.99	11.34
4H	2H	10.39	11.09	11.39	12.08	13.40	6.93	7.62	7.93	8.62	9.94
	3H	12.21	12.79	13.23	13.82	15.15	8.27	8.85	9.28	9.87	11.20
	4H	12.90	13.43	13.92	14.45	15.80	8.81	9.34	9.83	10.36	11.71
	6H	13.41	13.87	14.44	14.91	16.26	9.22	9.68	10.25	10.72	12.07
	8H	13.58	14.01	14.62	15.04	16.41	9.35	9.77	10.38	10.80	12.17
	12H	13.68	14.06	14.73	15.11	16.48	9.41	9.79	10.46	10.84	12.21
8H	4H	12.87	13.29	13.90	14.32	15.69	9.09	9.51	10.12	10.55	11.91
	6H	13.43	13.78	14.48	14.85	16.22	9.60	9.95	10.65	11.02	12.39
	8H	13.64	13.95	14.70	15.01	16.39	9.78	10.09	10.85	11.15	12.53
	12H	13.78	14.05	14.84	15.10	16.53	9.90	10.17	10.96	11.22	12.65
12H	4H	12.82	13.20	13.87	14.25	15.62	9.09	9.48	10.14	10.52	11.89
	6H	13.40	13.71	14.46	14.77	16.15	9.65	9.95	10.71	11.01	12.40
	8H	13.62	13.89	14.68	14.94	16.37	9.85	10.12	10.92	11.17	12.60