

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911868

Luminaire Tested: DFN2DIP-SQ3F0-060D040US850-FLLFLL

Issue Date: 11/21/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P911868  
REPORT IS A COMBINATION OF REPORTS P899865 AND P896733  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ3F0-060D040US850-FLLFLL  
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 10513.2 lumens  
Efficiency: N/A  
Efficacy: 125.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')  
CIE Type: Semi-Direct

Input Watts (W): 83.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9971  
Total Harmonic Distortion (THDi): 0.049  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P911868  
CATALOG NUMBER: DFN2DIP-SQ3F0-060D040US850-FLLFLL

### Luminous Intensity Polar Plot

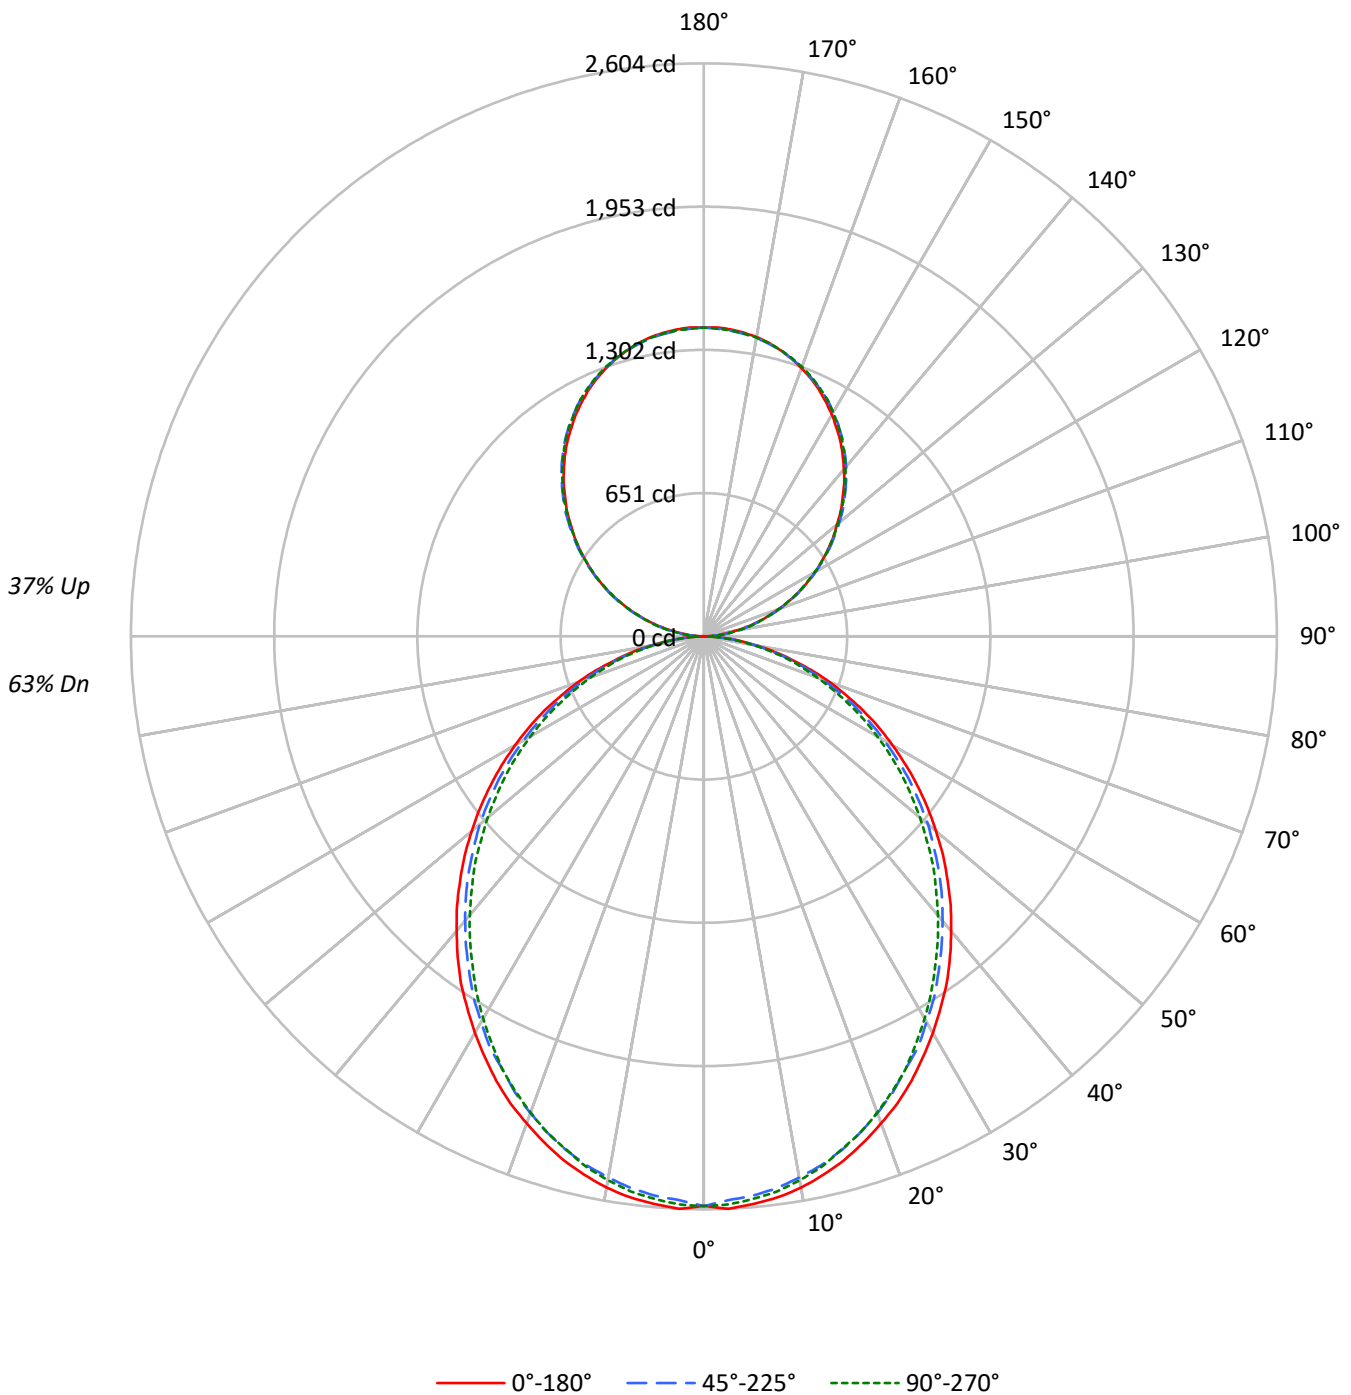



TEST NUMBER: P911868  
 CATALOG NUMBER: DFN2DIP-SQ3F0-060D040US850-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	110	110	110	110	103	103	103	103	90	90	90	79	79	79	68	68	68	68	68	68	63
1	101	96	92	89	94	90	87	84	79	77	74	69	67	66	60	59	57	60	59	57	53
2	92	84	78	72	86	79	73	69	70	65	62	61	58	55	53	50	48	53	50	48	44
3	84	74	66	60	78	70	63	58	61	56	52	54	50	46	47	44	41	47	44	41	37
4	77	66	57	51	71	62	54	49	55	49	44	48	43	40	42	38	35	42	38	35	32
5	70	58	50	44	66	55	48	42	49	43	38	43	38	35	38	34	31	38	34	31	28
6	65	53	44	38	61	50	42	37	44	38	33	39	34	30	34	30	27	34	30	27	25
7	60	48	39	34	56	45	38	32	40	34	30	36	31	27	31	27	24	31	27	24	22
8	56	43	35	30	52	41	34	29	37	31	26	33	28	24	29	25	22	29	25	22	20
9	52	40	32	27	49	38	30	26	34	28	24	30	25	22	27	23	20	27	23	20	18
10	49	36	29	24	46	35	28	23	31	25	21	28	23	20	25	21	18	25	21	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2967	2967	2967
5°	2969	2923	2944
10°	2944	2882	2903
15°	2898	2833	2840
20°	2838	2765	2775
25°	2778	2684	2700
30°	2703	2609	2606
35°	2632	2520	2506
40°	2545	2431	2410
45°	2458	2341	2313
50°	2362	2246	2200
55°	2262	2137	2096
60°	2149	2008	1977
65°	2025	1874	1836
70°	1868	1710	1684
75°	1650	1513	1543
80°	1387	1262	1275
85°	976	836	835

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2458 cd/sqm



TEST NUMBER: P911868

CATALOG NUMBER: DFN2DIP-SQ3F0-060D040US850-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	243.7	2.3
10°-20°	685.6	6.5
20°-30°	1007.6	9.6
30°-40°	1170.3	11.1
40°-50°	1168.8	11.1
50°-60°	1019.2	9.7
60°-70°	753.4	7.2
70°-80°	426.3	4.1
80°-90°	116.5	1.1
90°-100°	86.8	0.8
100°-110°	275.8	2.6
110°-120°	472.0	4.5
120°-130°	620.8	5.9
130°-140°	696.8	6.6
140°-150°	683.3	6.5
150°-160°	573.2	5.5
160°-170°	380.1	3.6
170°-180°	132.9	1.3
0°-30°	1937.0	18.4
0°-40°	3107.2	29.6
0°-60°	5295.3	50.4
0°-90°	6591.4	62.7
90°-120°	834.7	7.9
90°-150°	2835.6	27.0
90°-180°	3922.0	37.3
0°-180°	10513.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2589	2589	2589	2589	2589	
5°	2589	2579	2552	2572	2567	246
15°	2465	2450	2417	2428	2415	694
25°	2231	2211	2168	2173	2168	1026
35°	1925	1900	1860	1845	1832	1202
45°	1566	1549	1511	1484	1474	1209
55°	1185	1170	1140	1110	1098	1060
65°	799	784	759	737	724	790
75°	418	413	401	386	391	446
85°	102	100	97	90	87	114
90°	1	15	42	39	40	10
95°	62	74	76	76	74	69
105°	255	258	260	263	263	269
115°	474	480	478	477	474	469
125°	689	700	696	692	691	616
135°	891	904	907	906	902	689
145°	1082	1090	1097	1098	1094	676
155°	1237	1240	1244	1250	1246	569
165°	1346	1345	1345	1353	1347	380
175°	1400	1397	1394	1403	1396	133
180°	1403	1403	1403	1403	1403	



TEST NUMBER: P911868

CATALOG NUMBER: DFN2DIP-SQ3F0-060D040US850-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2589.1	2589.1	2589.1	2589.1	2589.1
2.5°	2604.2	2591.7	2564.2	2589.1	2584.3
5°	2589.1	2579.3	2551.8	2571.7	2566.9
7.5°	2571.7	2556.9	2529.4	2549.5	2544.5
10°	2544.5	2527.1	2497.1	2517.0	2509.6
12.5°	2507.0	2492.1	2462.3	2474.7	2469.7
15°	2464.6	2449.9	2417.4	2427.5	2415.1
17.5°	2412.4	2397.7	2365.2	2377.5	2365.2
20°	2355.1	2340.3	2305.4	2312.8	2303.1
22.5°	2298.1	2275.6	2243.1	2243.1	2238.1
25°	2230.6	2210.9	2168.5	2173.3	2168.5
27.5°	2155.9	2138.5	2106.2	2098.9	2086.5
30°	2081.5	2061.3	2024.1	2016.7	2006.6
32.5°	2001.6	1986.9	1947.0	1931.9	1921.9
35°	1924.6	1899.7	1859.8	1844.7	1832.3
37.5°	1837.4	1814.9	1775.1	1757.5	1745.1
40°	1747.8	1727.7	1687.9	1665.7	1655.6
42.5°	1660.6	1640.5	1601.0	1575.9	1561.0
45°	1566.1	1548.6	1511.1	1484.0	1473.9
47.5°	1473.9	1456.4	1416.6	1389.1	1374.3
50°	1376.7	1364.3	1329.5	1294.5	1282.1
52.5°	1282.1	1264.7	1232.4	1205.0	1187.6
55°	1185.2	1170.1	1140.3	1110.4	1098.0
57.5°	1088.0	1075.6	1043.1	1013.3	1003.2
60°	990.8	981.0	946.2	918.7	911.3
62.5°	896.2	878.8	853.9	829.1	819.1
65°	799.3	784.3	759.4	736.9	724.5
67.5°	699.7	687.0	664.8	647.4	637.3
70°	607.5	597.5	575.0	557.6	547.8
72.5°	512.9	502.9	490.5	473.1	465.7
75°	418.1	413.4	400.7	385.9	390.9
77.5°	333.6	323.6	318.5	311.2	303.8
80°	249.1	246.4	241.4	234.0	229.0
82.5°	169.3	169.3	166.9	156.9	156.9
85°	101.9	99.6	97.1	89.5	87.2
87.5°	44.9	39.9	34.8	27.5	24.8
90°	1.2	15.2	41.5	38.9	40.1
92.5°	26.2	35.5	36.8	38.0	38.0
95°	61.8	73.6	75.7	75.7	73.6
97.5°	102.8	113.8	118.4	118.4	118.4
100°	150.2	159.9	163.2	163.2	162.0
102.5°	200.1	207.3	211.9	213.1	211.9
105°	254.6	258.0	260.5	262.6	262.6
107.5°	308.7	313.8	313.8	314.6	308.7
110°	361.2	368.0	368.0	368.0	364.6



TEST NUMBER: P911868

CATALOG NUMBER: DFN2DIP-SQ3F0-060D040US850-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	417.9	425.1	423.7	420.4	417.9
115°	473.7	480.5	478.3	477.1	473.7
117.5°	529.1	538.4	532.5	529.1	525.8
120°	585.0	594.2	585.0	585.0	581.1
122.5°	635.7	647.5	641.7	638.2	635.7
125°	689.0	699.6	696.2	692.3	691.1
127.5°	741.0	754.1	749.5	744.4	741.0
130°	789.6	804.9	802.8	800.3	795.6
132.5°	844.2	856.0	856.9	850.9	847.6
135°	891.2	904.3	906.8	905.5	902.2
137.5°	943.6	954.2	956.3	955.4	950.4
140°	989.7	1000.3	1006.2	1006.2	1001.5
142.5°	1037.1	1047.7	1051.0	1052.3	1047.7
145°	1081.9	1090.4	1097.1	1098.5	1093.8
147.5°	1122.1	1132.6	1137.7	1139.8	1135.2
150°	1163.6	1170.8	1175.4	1179.2	1175.4
152.5°	1200.4	1207.5	1213.5	1218.1	1213.5
155°	1237.1	1240.5	1244.3	1250.3	1246.4
157.5°	1268.9	1271.4	1273.5	1282.0	1276.0
160°	1297.2	1299.7	1301.0	1308.2	1303.1
162.5°	1323.4	1323.4	1324.7	1332.7	1326.8
165°	1345.9	1344.6	1344.6	1353.0	1347.1
167.5°	1366.2	1362.3	1362.3	1370.8	1364.8
170°	1381.4	1377.9	1376.7	1385.1	1377.9
172.5°	1391.9	1388.6	1387.2	1395.8	1388.6
175°	1400.4	1397.0	1394.5	1402.9	1395.8
177.5°	1405.1	1401.7	1399.1	1406.3	1399.1
180°	1402.9	1402.9	1402.9	1402.9	1402.9



TEST NUMBER: P911868  
 CATALOG NUMBER: DFN2DIP-SQ3F0-060D040US850-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.11	13.10	12.95	13.96	15.04	11.67	12.65	12.51	13.52	14.59
	3H	13.78	14.66	14.63	15.53	16.64	13.29	14.17	14.14	15.04	16.15
	4H	14.37	15.20	15.23	16.08	17.20	13.87	14.71	14.74	15.59	16.70
	6H	14.77	15.54	15.65	16.43	17.56	14.27	15.04	15.15	15.93	17.06
	8H	14.88	15.61	15.76	16.52	17.64	14.37	15.11	15.26	16.01	17.14
	12H	14.93	15.63	15.82	16.53	17.68	14.42	15.12	15.31	16.02	17.17
4H	2H	12.58	13.42	13.46	14.30	15.41	12.23	13.07	13.10	13.95	15.06
	3H	14.45	15.15	15.34	16.07	17.20	14.05	14.75	14.93	15.66	16.79
	4H	15.17	15.81	16.07	16.72	17.87	14.75	15.38	15.64	16.29	17.45
	6H	15.69	16.24	16.60	17.17	18.33	15.26	15.81	16.17	16.74	17.90
	8H	15.84	16.35	16.75	17.28	18.45	15.40	15.92	16.32	16.84	18.01
	12H	15.92	16.38	16.85	17.32	18.50	15.47	15.93	16.40	16.87	18.05
8H	4H	15.37	15.89	16.29	16.81	17.99	15.00	15.51	15.91	16.44	17.61
	6H	16.00	16.43	16.94	17.40	18.57	15.62	16.05	16.56	17.01	18.18
	8H	16.22	16.60	17.17	17.56	18.75	15.83	16.21	16.78	17.16	18.35
	12H	16.36	16.69	17.31	17.64	18.88	15.95	16.28	16.90	17.23	18.47
12H	4H	15.36	15.83	16.30	16.77	17.95	15.00	15.46	15.93	16.40	17.58
	6H	16.03	16.41	16.98	17.37	18.56	15.66	16.04	16.61	17.00	18.18
	8H	16.28	16.61	17.23	17.56	18.80	15.90	16.23	16.85	17.18	18.42