

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911898

Luminaire Tested: DFN2DIP-SQ3F0-060D110US850-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911898
REPORT IS A COMBINATION OF REPORTS P899992 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-060D110US850-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 16452.0 lumens
Efficiency: N/A
Efficacy: 118.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 139.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911898

CATALOG NUMBER: DFN2DIP-SQ3F0-060D110US850-RLLFLL

Luminous Intensity Polar Plot

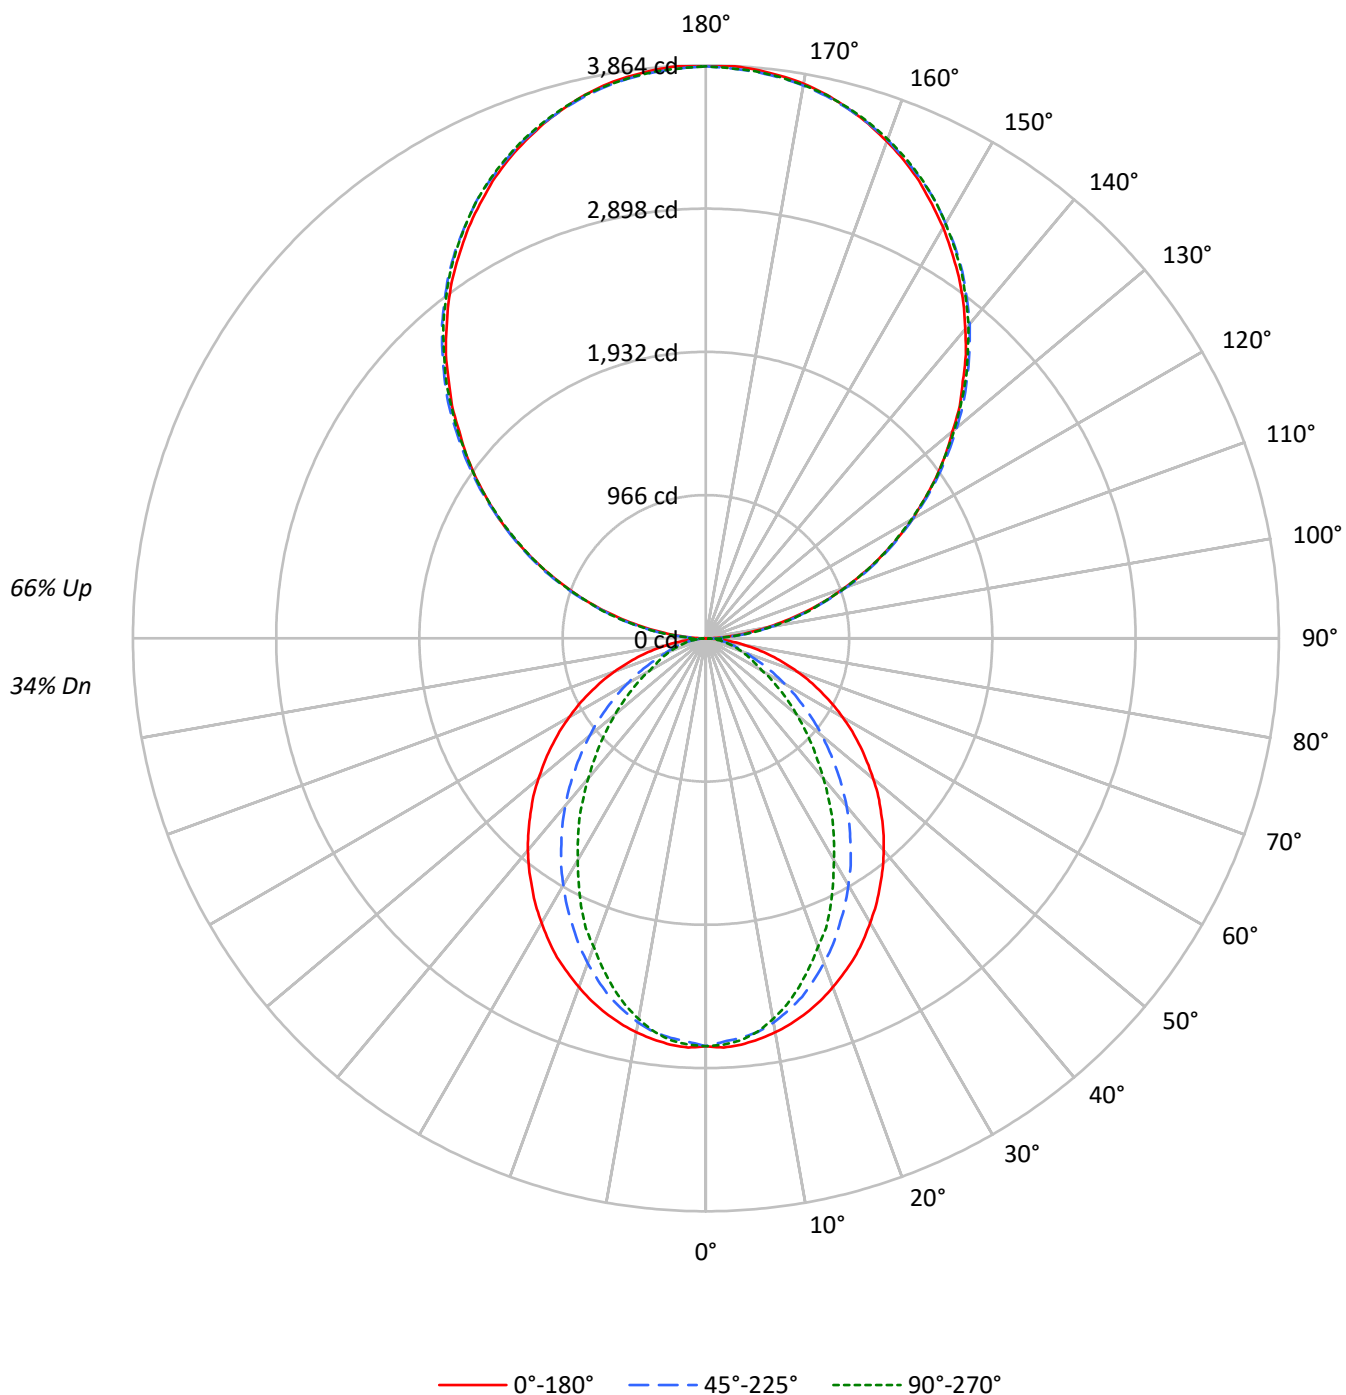

TEST NUMBER: P911898

CATALOG NUMBER: DFN2DIP-SQ3F0-060D110US850-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	75	75	75	58	58	58	42	42	42
1	95	91	87	84	85	82	79	76	66	64	62	51	50	48	37	37	36
2	86	79	74	69	78	72	67	63	58	55	52	45	43	41	33	32	31
3	79	70	63	58	71	64	58	53	51	47	44	40	37	35	30	28	27
4	72	62	55	49	65	56	50	45	46	41	38	36	33	30	27	25	23
5	66	55	48	42	60	50	44	39	41	36	32	32	29	26	24	22	20
6	61	50	42	36	55	45	39	34	37	32	28	29	26	23	22	20	18
7	57	45	37	32	51	41	34	30	34	29	25	27	23	21	20	18	16
8	53	41	33	28	47	37	31	26	31	26	22	25	21	18	19	16	15
9	49	37	30	25	44	34	28	23	28	23	20	23	19	17	17	15	13
10	46	34	27	23	41	31	25	21	26	21	18	21	17	15	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3151	3151	3151
5°	3154	3099	3120
10°	3121	3036	3017
15°	3076	2934	2859
20°	3017	2794	2666
25°	2957	2637	2479
30°	2877	2476	2243
35°	2798	2303	2035
40°	2718	2125	1797
45°	2625	1928	1582
50°	2528	1728	1371
55°	2427	1516	1169
60°	2310	1294	961
65°	2176	1068	864
70°	2012	858	780
75°	1807	752	708
80°	1510	624	610
85°	1024	406	452

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 3881 cd/sqm

TEST NUMBER: P911898

CATALOG NUMBER: DFN2DIP-SQ3F0-060D110US850-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	257.7	1.6
10°-20°	707.6	4.3
20°-30°	993.4	6.0
30°-40°	1082.8	6.6
40°-50°	995.2	6.0
50°-60°	781.6	4.8
60°-70°	508.8	3.1
70°-80°	261.9	1.6
80°-90°	77.8	0.5
90°-100°	238.7	1.5
100°-110°	758.6	4.6
110°-120°	1298.1	7.9
120°-130°	1707.2	10.4
130°-140°	1916.3	11.6
140°-150°	1879.1	11.4
150°-160°	1576.3	9.6
160°-170°	1045.4	6.4
170°-180°	365.4	2.2
0°-30°	1958.7	11.9
0°-40°	3041.5	18.5
0°-60°	4818.4	29.3
0°-90°	5666.9	34.4
90°-120°	2295.4	14.0
90°-150°	7798.0	47.4
90°-180°	10785.0	65.6
0°-180°	16452.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2750	2750	2750	2750	2750	
5°	2750	2738	2705	2728	2720	261
15°	2616	2588	2504	2456	2432	737
25°	2374	2295	2130	2028	1991	1092
35°	2046	1919	1700	1543	1488	1281
45°	1672	1506	1244	1068	1008	1292
55°	1272	1078	809	660	612	1136
65°	859	657	433	349	341	851
75°	458	284	199	182	179	484
85°	107	55	47	47	47	123
90°	3	42	114	107	110	16
95°	170	202	208	208	202	189
105°	700	710	716	722	722	739
115°	1303	1321	1316	1312	1303	1288
125°	1895	1924	1914	1904	1900	1693
135°	2451	2487	2494	2490	2481	1894
145°	2975	2998	3017	3021	3008	1859
155°	3402	3411	3422	3438	3428	1566
165°	3701	3698	3698	3721	3704	1044
175°	3851	3842	3835	3858	3838	366
180°	3858	3858	3858	3858	3858	

TEST NUMBER: P911898

CATALOG NUMBER: DFN2DIP-SQ3F0-060D110US850-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2750.1	2750.1	2750.1	2750.1	2750.1
2.5°	2762.5	2750.1	2722.6	2747.7	2742.7
5°	2750.1	2737.7	2705.2	2727.7	2720.3
7.5°	2727.7	2712.8	2678.0	2687.8	2675.4
10°	2697.8	2680.3	2630.8	2623.1	2608.3
12.5°	2660.6	2638.1	2570.8	2556.0	2528.5
15°	2615.7	2588.2	2503.7	2456.4	2431.6
17.5°	2563.5	2523.5	2419.0	2364.3	2324.5
20°	2503.7	2453.8	2329.5	2267.4	2212.5
22.5°	2439.0	2381.7	2237.3	2152.8	2115.5
25°	2374.4	2294.6	2130.4	2028.5	1991.0
27.5°	2297.3	2212.5	2030.8	1913.8	1856.6
30°	2215.1	2120.3	1921.2	1794.5	1727.2
32.5°	2135.4	2020.8	1817.0	1667.5	1605.2
35°	2045.9	1918.9	1700.0	1543.1	1488.2
37.5°	1958.7	1821.6	1590.4	1418.5	1356.4
40°	1866.6	1717.4	1475.7	1299.1	1234.4
42.5°	1772.1	1612.8	1361.4	1177.1	1115.1
45°	1672.5	1505.6	1244.5	1067.5	1007.9
47.5°	1578.0	1401.3	1132.5	955.6	901.0
50°	1473.4	1296.8	1022.9	851.0	799.0
52.5°	1371.2	1184.5	918.4	754.1	706.9
55°	1271.7	1077.6	808.8	659.6	612.3
57.5°	1169.8	970.6	711.9	572.5	532.5
60°	1065.2	866.1	609.7	483.0	443.0
62.5°	963.3	764.2	522.6	403.2	383.4
65°	858.7	657.0	433.1	348.6	340.9
67.5°	759.1	557.4	348.6	306.1	298.7
70°	654.5	460.5	288.6	263.8	253.7
72.5°	555.1	370.7	241.3	221.6	216.5
75°	457.9	283.6	199.1	181.7	179.3
77.5°	361.0	201.5	156.8	146.8	141.8
80°	271.2	144.4	119.3	109.6	109.6
82.5°	189.1	97.1	82.1	77.1	77.1
85°	106.9	54.7	47.2	47.2	47.2
87.5°	39.9	19.9	19.9	17.4	17.4
90°	3.4	41.9	114.0	107.0	110.5
92.5°	72.1	97.7	101.1	104.7	104.7
95°	169.8	202.4	208.2	208.2	202.4
97.5°	282.7	312.8	325.7	325.7	325.7
100°	412.9	439.6	448.9	448.9	445.5
102.5°	550.2	569.9	582.8	586.2	582.8
105°	700.2	709.5	716.5	722.3	722.3
107.5°	849.1	863.0	863.0	865.4	849.1
110°	993.3	1012.0	1012.0	1012.0	1002.6

TEST NUMBER: P911898

CATALOG NUMBER: DFN2DIP-SQ3F0-060D110US850-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1149.1	1168.9	1165.4	1156.1	1149.1
115°	1302.7	1321.3	1315.5	1312.1	1302.7
117.5°	1455.1	1480.6	1464.3	1455.1	1445.8
120°	1608.6	1634.2	1608.6	1608.6	1598.2
122.5°	1748.2	1780.7	1764.4	1755.1	1748.2
125°	1894.7	1923.8	1914.5	1904.0	1900.5
127.5°	2037.8	2073.8	2061.1	2047.1	2037.8
130°	2171.5	2213.5	2207.6	2200.6	2187.8
132.5°	2321.6	2354.2	2356.5	2340.2	2330.9
135°	2450.7	2486.7	2493.7	2490.3	2480.9
137.5°	2594.9	2624.0	2629.8	2627.4	2613.6
140°	2721.7	2750.8	2767.1	2767.1	2754.3
142.5°	2852.0	2881.1	2890.4	2893.8	2881.1
145°	2975.2	2998.5	3017.1	3020.6	3007.8
147.5°	3085.8	3114.8	3128.8	3134.6	3121.8
150°	3199.8	3219.5	3232.3	3242.8	3232.3
152.5°	3300.9	3320.7	3337.0	3349.8	3337.0
155°	3402.2	3411.4	3421.9	3438.2	3427.7
157.5°	3489.4	3496.3	3502.1	3525.4	3509.1
160°	3567.3	3574.3	3577.7	3597.6	3583.6
162.5°	3639.4	3639.4	3643.0	3665.0	3648.7
165°	3701.1	3697.5	3697.5	3720.8	3704.5
167.5°	3756.8	3746.4	3746.4	3769.7	3753.4
170°	3798.8	3789.5	3786.0	3809.2	3789.5
172.5°	3827.8	3818.5	3815.1	3838.4	3818.5
175°	3851.1	3841.8	3834.8	3858.1	3838.4
177.5°	3863.9	3854.6	3847.6	3867.4	3847.6
180°	3858.1	3858.1	3858.1	3858.1	3858.1

TEST NUMBER: P911898

CATALOG NUMBER: DFN2DIP-SQ3F0-060D110US850-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.44	10.16	10.53	11.24	12.72	5.40	6.12	6.49	7.20	8.68
	3H	11.11	11.75	12.20	12.84	14.34	6.58	7.22	7.67	8.31	9.81
	4H	11.71	12.32	12.81	13.41	14.91	7.02	7.63	8.12	8.72	10.22
	6H	12.12	12.68	13.23	13.77	15.29	7.33	7.89	8.44	8.98	10.50
	8H	12.24	12.77	13.36	13.88	15.39	7.41	7.94	8.53	9.05	10.56
	12H	12.30	12.80	13.42	13.91	15.44	7.45	7.95	8.57	9.06	10.59
4H	2H	9.45	10.05	10.56	11.14	12.65	5.98	6.59	7.09	7.68	9.19
	3H	11.26	11.76	12.38	12.88	14.40	7.32	7.82	8.43	8.94	10.45
	4H	11.94	12.41	13.06	13.51	15.05	7.85	8.32	8.98	9.43	10.96
	6H	12.45	12.84	13.58	13.98	15.50	8.26	8.66	9.39	9.79	11.32
	8H	12.62	12.99	13.75	14.11	15.66	8.38	8.75	9.51	9.88	11.42
	12H	12.70	13.04	13.85	14.18	15.72	8.44	8.77	9.58	9.91	11.46
8H	4H	11.90	12.27	13.03	13.39	14.94	8.12	8.49	9.25	9.62	11.16
	6H	12.46	12.76	13.61	13.93	15.47	8.63	8.93	9.78	10.10	11.64
	8H	12.67	12.94	13.83	14.08	15.64	8.81	9.08	9.97	10.23	11.79
	12H	12.80	13.04	13.96	14.18	15.77	8.92	9.16	10.08	10.30	11.89
12H	4H	11.85	12.18	12.99	13.32	14.87	8.12	8.46	9.27	9.59	11.14
	6H	12.43	12.70	13.59	13.84	15.40	8.68	8.94	9.83	10.09	11.65
	8H	12.64	12.88	13.80	14.02	15.62	8.88	9.11	10.03	10.25	11.85