

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911951

Luminaire Tested: DFN2DIP-SQ3F0-080D060US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911951
REPORT IS A COMBINATION OF REPORTS P901426 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-080D060US850-RLLONL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14128.7 lumens
Efficiency: N/A
Efficacy: 116.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 121.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911951

CATALOG NUMBER: DFN2DIP-SQ3F0-080D060US850-RLLONL

Luminous Intensity Polar Plot

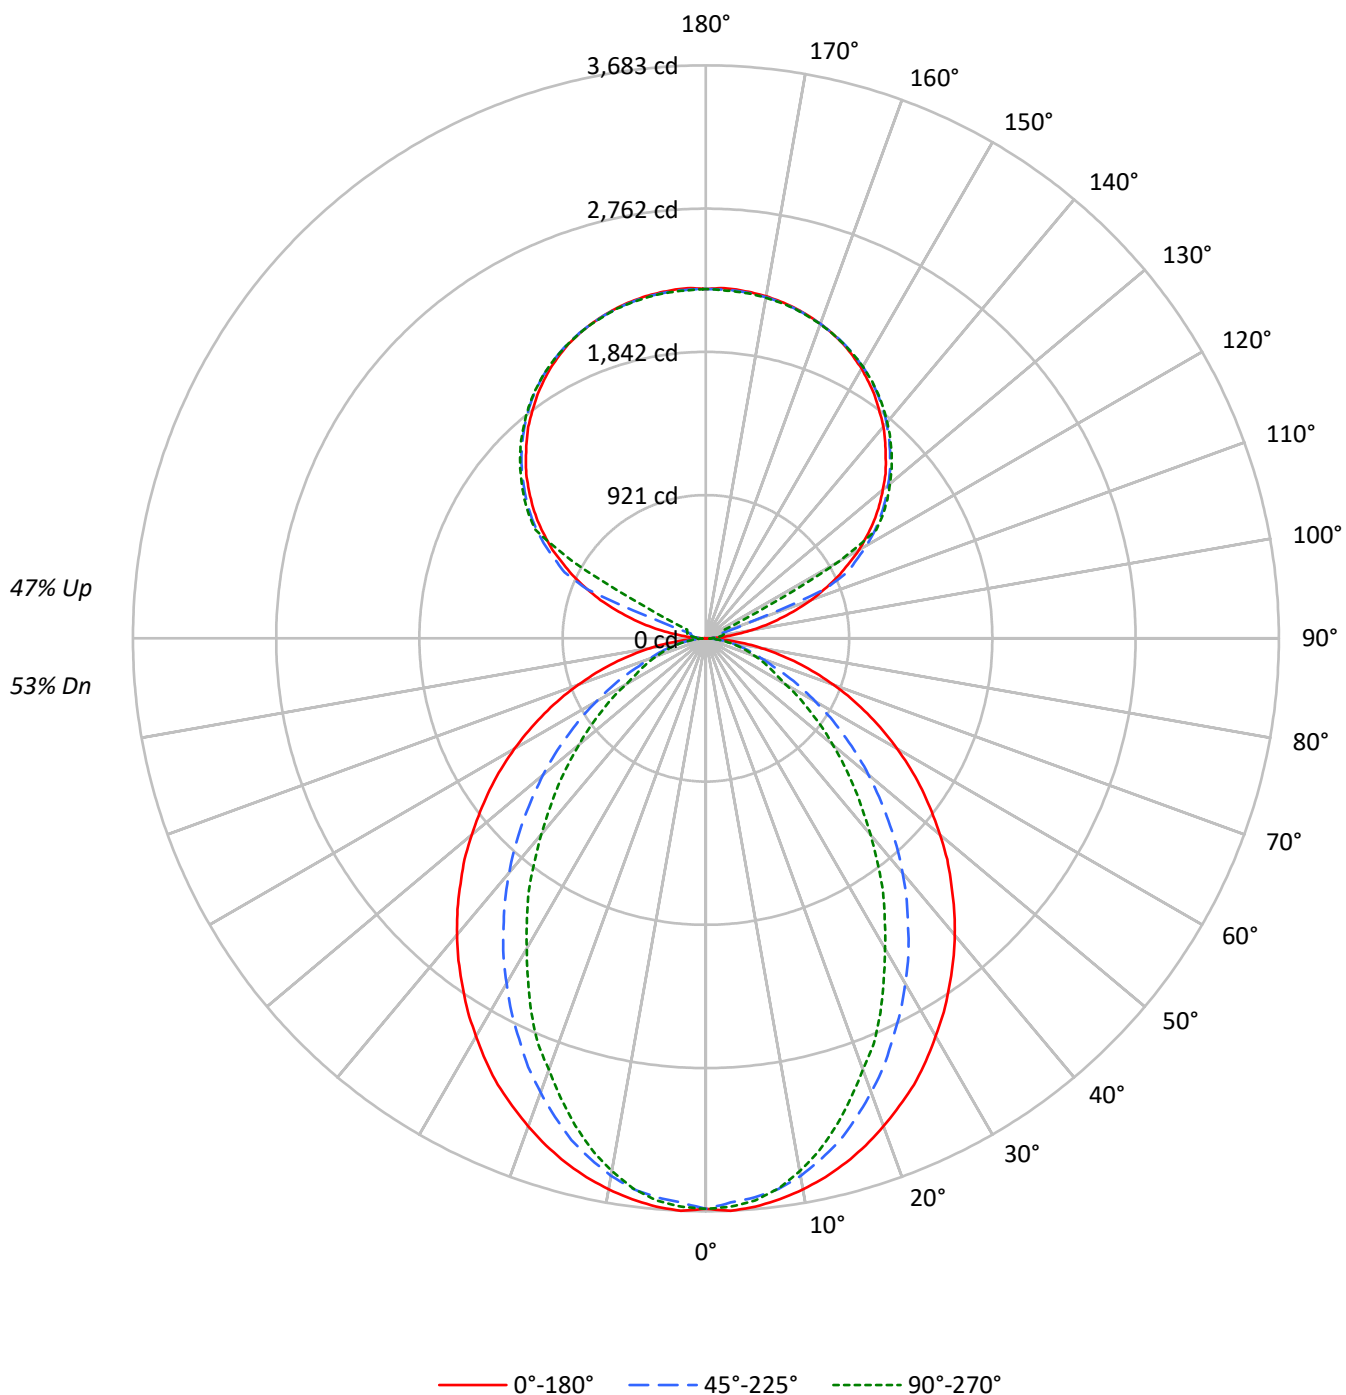

TEST NUMBER: P911951

CATALOG NUMBER: DFN2DIP-SQ3F0-080D060US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59
1	99	95	91	88	92	88	85	82	76	73	71	64	62	61	53	52	51
2	91	83	78	73	84	78	73	68	67	63	60	57	54	52	47	45	44
3	83	74	67	61	77	69	63	58	59	55	51	51	47	44	42	40	38
4	76	66	58	52	70	61	55	49	53	48	44	45	42	38	38	35	33
5	70	59	51	45	65	55	48	43	48	42	38	41	37	34	35	32	29
6	65	53	45	39	60	50	43	37	43	38	34	37	33	30	32	28	26
7	60	48	40	35	56	45	38	33	39	34	30	34	30	26	29	26	23
8	56	44	36	31	52	41	34	29	36	31	27	31	27	24	27	24	21
9	52	40	33	28	48	38	31	26	33	28	24	29	25	22	25	22	19
10	49	37	30	25	45	35	28	24	31	25	22	27	23	20	23	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4201	4201	4201
5°	4205	4132	4160
10°	4161	4048	4023
15°	4101	3912	3813
20°	4023	3725	3555
25°	3942	3515	3306
30°	3835	3301	2990
35°	3730	3071	2713
40°	3623	2833	2396
45°	3499	2570	2109
50°	3371	2305	1828
55°	3236	2021	1558
60°	3080	1725	1281
65°	2901	1424	1152
70°	2683	1144	1040
75°	2409	1003	944
80°	2013	832	814
85°	1365	542	603

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3499 cd/sqm

TEST NUMBER: P911951

CATALOG NUMBER: DFN2DIP-SQ3F0-080D060US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	343.7	2.4
10°-20°	943.4	6.7
20°-30°	1324.5	9.4
30°-40°	1443.8	10.2
40°-50°	1327.0	9.4
50°-60°	1042.1	7.4
60°-70°	678.3	4.8
70°-80°	349.2	2.5
80°-90°	93.1	0.7
90°-100°	74.1	0.5
100°-110°	276.0	2.0
110°-120°	732.1	5.2
120°-130°	1214.2	8.6
130°-140°	1289.8	9.1
140°-150°	1198.7	8.5
150°-160°	963.8	6.8
160°-170°	621.0	4.4
170°-180°	213.7	1.5
0°-30°	2611.6	18.5
0°-40°	4055.4	28.7
0°-60°	6424.5	45.5
0°-90°	7545.2	53.4
90°-120°	1082.2	7.7
90°-150°	4785.0	33.9
90°-180°	6583.0	46.6
0°-180°	14128.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3667	3667	3667	3667	3667	
5°	3667	3650	3607	3637	3627	348
15°	3488	3451	3338	3275	3242	983
25°	3166	3060	2840	2705	2655	1456
35°	2728	2558	2267	2058	1984	1707
45°	2230	2008	1659	1423	1344	1722
55°	1696	1437	1078	879	816	1515
65°	1145	876	577	465	454	1135
75°	610	378	266	242	239	646
85°	143	73	63	63	63	164
90°	2	20	32	41	44	13
95°	106	52	63	72	70	125
105°	494	543	99	117	124	528
115°	934	962	1003	250	133	920
125°	1321	1342	1373	1384	1389	1178
135°	1635	1661	1675	1692	1688	1263
145°	1896	1895	1922	1934	1926	1186
155°	2088	2074	2093	2103	2090	962
165°	2200	2190	2195	2207	2195	622
175°	2250	2239	2242	2254	2238	214
180°	2246	2246	2246	2246	2246	

TEST NUMBER: P911951

CATALOG NUMBER: DFN2DIP-SQ3F0-080D060US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3666.8	3666.8	3666.8	3666.8	3666.8
2.5°	3683.3	3666.8	3630.2	3663.6	3656.9
5°	3666.8	3650.3	3606.9	3636.9	3627.0
7.5°	3636.9	3617.1	3570.6	3583.7	3567.1
10°	3597.0	3573.9	3507.7	3497.5	3477.7
12.5°	3547.5	3517.5	3427.7	3408.0	3371.4
15°	3487.6	3451.0	3338.3	3275.3	3242.2
17.5°	3417.8	3364.7	3225.3	3152.4	3099.2
20°	3338.3	3271.8	3106.0	3023.2	2949.9
22.5°	3252.0	3175.6	2983.1	2870.4	2820.7
25°	3165.8	3059.5	2840.5	2704.6	2654.6
27.5°	3062.9	2949.9	2707.7	2551.8	2475.4
30°	2953.5	2827.1	2561.7	2392.7	2302.8
32.5°	2847.1	2694.4	2422.6	2223.3	2140.3
35°	2727.8	2558.5	2266.6	2057.5	1984.2
37.5°	2611.6	2428.9	2120.5	1891.3	1808.6
40°	2488.8	2289.9	1967.7	1732.1	1645.9
42.5°	2362.7	2150.5	1815.2	1569.6	1486.7
45°	2230.0	2007.5	1659.3	1423.4	1343.9
47.5°	2104.0	1868.4	1510.0	1274.1	1201.3
50°	1964.5	1729.0	1364.0	1134.7	1065.3
52.5°	1828.3	1579.3	1224.4	1005.5	942.5
55°	1695.6	1436.8	1078.4	879.4	816.4
57.5°	1559.7	1294.2	949.2	763.3	710.1
60°	1420.2	1154.8	812.9	643.9	590.8
62.5°	1284.3	1018.8	696.8	537.6	511.2
65°	1144.9	875.9	577.3	464.8	454.5
67.5°	1012.2	743.3	464.8	408.0	398.2
70°	872.8	614.1	384.8	351.7	338.4
72.5°	740.0	494.3	321.8	295.4	288.7
75°	610.5	378.2	265.5	242.2	239.1
77.5°	481.3	268.6	209.2	195.7	189.1
80°	361.5	192.6	159.1	146.1	146.1
82.5°	252.1	129.5	109.5	102.8	102.8
85°	142.6	72.9	63.0	63.0	63.0
87.5°	53.1	26.4	26.4	23.3	23.3
90°	1.6	19.5	32.4	40.7	43.8
92.5°	40.7	34.2	38.9	42.3	43.8
95°	105.6	51.9	63.3	71.6	69.9
97.5°	190.1	56.9	82.7	87.8	89.4
100°	287.7	65.0	92.6	105.6	108.8
102.5°	394.8	391.7	95.9	113.7	118.7
105°	493.9	542.7	99.1	116.9	123.5
107.5°	609.4	649.9	102.5	120.2	126.8
110°	720.0	753.9	284.5	122.0	128.3

TEST NUMBER: P911951

CATALOG NUMBER: DFN2DIP-SQ3F0-080D060US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	823.9	853.0	825.4	125.0	130.1
115°	934.3	961.9	1002.6	250.3	133.3
117.5°	1030.2	1062.6	1090.4	857.9	432.2
120°	1137.5	1161.8	1191.2	1210.6	991.2
122.5°	1228.3	1254.4	1287.0	1296.6	1298.4
125°	1321.0	1342.2	1373.1	1384.5	1389.2
127.5°	1405.5	1428.3	1452.8	1469.0	1470.5
130°	1485.2	1511.2	1529.0	1546.9	1545.4
132.5°	1566.5	1587.6	1605.4	1620.0	1618.5
135°	1634.8	1660.8	1675.3	1691.7	1688.3
137.5°	1706.1	1725.6	1742.0	1758.2	1753.4
140°	1776.0	1789.1	1806.9	1821.5	1813.4
142.5°	1834.6	1846.0	1867.1	1880.0	1871.9
145°	1896.4	1894.6	1922.2	1933.7	1925.6
147.5°	1949.8	1945.0	1972.6	1980.7	1974.4
150°	2002.0	1990.5	2016.6	2026.3	2018.2
152.5°	2045.8	2032.8	2057.1	2067.0	2055.5
155°	2088.0	2073.5	2093.0	2102.7	2089.7
157.5°	2122.2	2109.2	2123.8	2135.3	2122.2
160°	2151.5	2141.6	2151.5	2161.1	2149.8
162.5°	2177.3	2167.7	2175.7	2187.2	2172.5
165°	2200.1	2190.5	2195.3	2206.7	2195.3
167.5°	2218.0	2208.2	2213.2	2224.7	2209.9
170°	2232.7	2222.9	2226.2	2237.5	2222.9
172.5°	2242.4	2232.7	2236.0	2247.4	2232.7
175°	2250.5	2239.1	2242.4	2253.7	2237.5
177.5°	2253.7	2242.4	2244.1	2255.5	2240.8
180°	2245.6	2245.6	2245.6	2245.6	2245.6

TEST NUMBER: P911951

CATALOG NUMBER: DFN2DIP-SQ3F0-080D060US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.41	13.27	13.35	14.22	15.44	8.37	9.23	9.31	10.18	11.40
	3H	14.09	14.86	15.03	15.81	17.06	9.56	10.33	10.50	11.28	12.53
	4H	14.70	15.42	15.66	16.38	17.64	10.01	10.73	10.97	11.69	12.95
	6H	15.11	15.78	16.09	16.75	18.02	10.32	10.99	11.29	11.96	13.23
	8H	15.24	15.87	16.22	16.86	18.12	10.41	11.05	11.39	12.03	13.30
	12H	15.30	15.90	16.28	16.88	18.17	10.45	11.06	11.43	12.03	13.32
4H	2H	12.43	13.16	13.40	14.12	15.38	8.97	9.70	9.94	10.66	11.91
	3H	14.26	14.86	15.23	15.85	17.12	10.32	10.92	11.29	11.91	13.18
	4H	14.95	15.50	15.93	16.48	17.78	10.86	11.41	11.84	12.39	13.69
	6H	15.46	15.93	16.46	16.94	18.24	11.27	11.75	12.27	12.75	14.05
	8H	15.63	16.08	16.63	17.08	18.38	11.40	11.84	12.40	12.84	14.15
	12H	15.73	16.13	16.74	17.14	18.46	11.46	11.86	12.48	12.88	14.19
8H	4H	14.92	15.36	15.92	16.36	17.67	11.14	11.58	12.14	12.58	13.89
	6H	15.48	15.84	16.50	16.89	18.19	11.65	12.01	12.67	13.06	14.36
	8H	15.69	16.01	16.72	17.04	18.37	11.84	12.16	12.87	13.19	14.51
	12H	15.83	16.11	16.86	17.13	18.50	11.95	12.23	12.98	13.26	14.63
12H	4H	14.87	15.27	15.89	16.29	17.60	11.14	11.54	12.16	12.56	13.87
	6H	15.45	15.78	16.48	16.80	18.13	11.70	12.02	12.73	13.05	14.37
	8H	15.67	15.95	16.71	16.98	18.35	11.90	12.19	12.94	13.21	14.58