

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912083

Luminaire Tested: DFN2DIP-SQ3F0-110D120US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912083
REPORT IS A COMBINATION OF REPORTS P901540 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-110D120US850-RLLONL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 23544.1 lumens
Efficiency: N/A
Efficacy: 114.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 206
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912083

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US850-RLLONL

Luminous Intensity Polar Plot

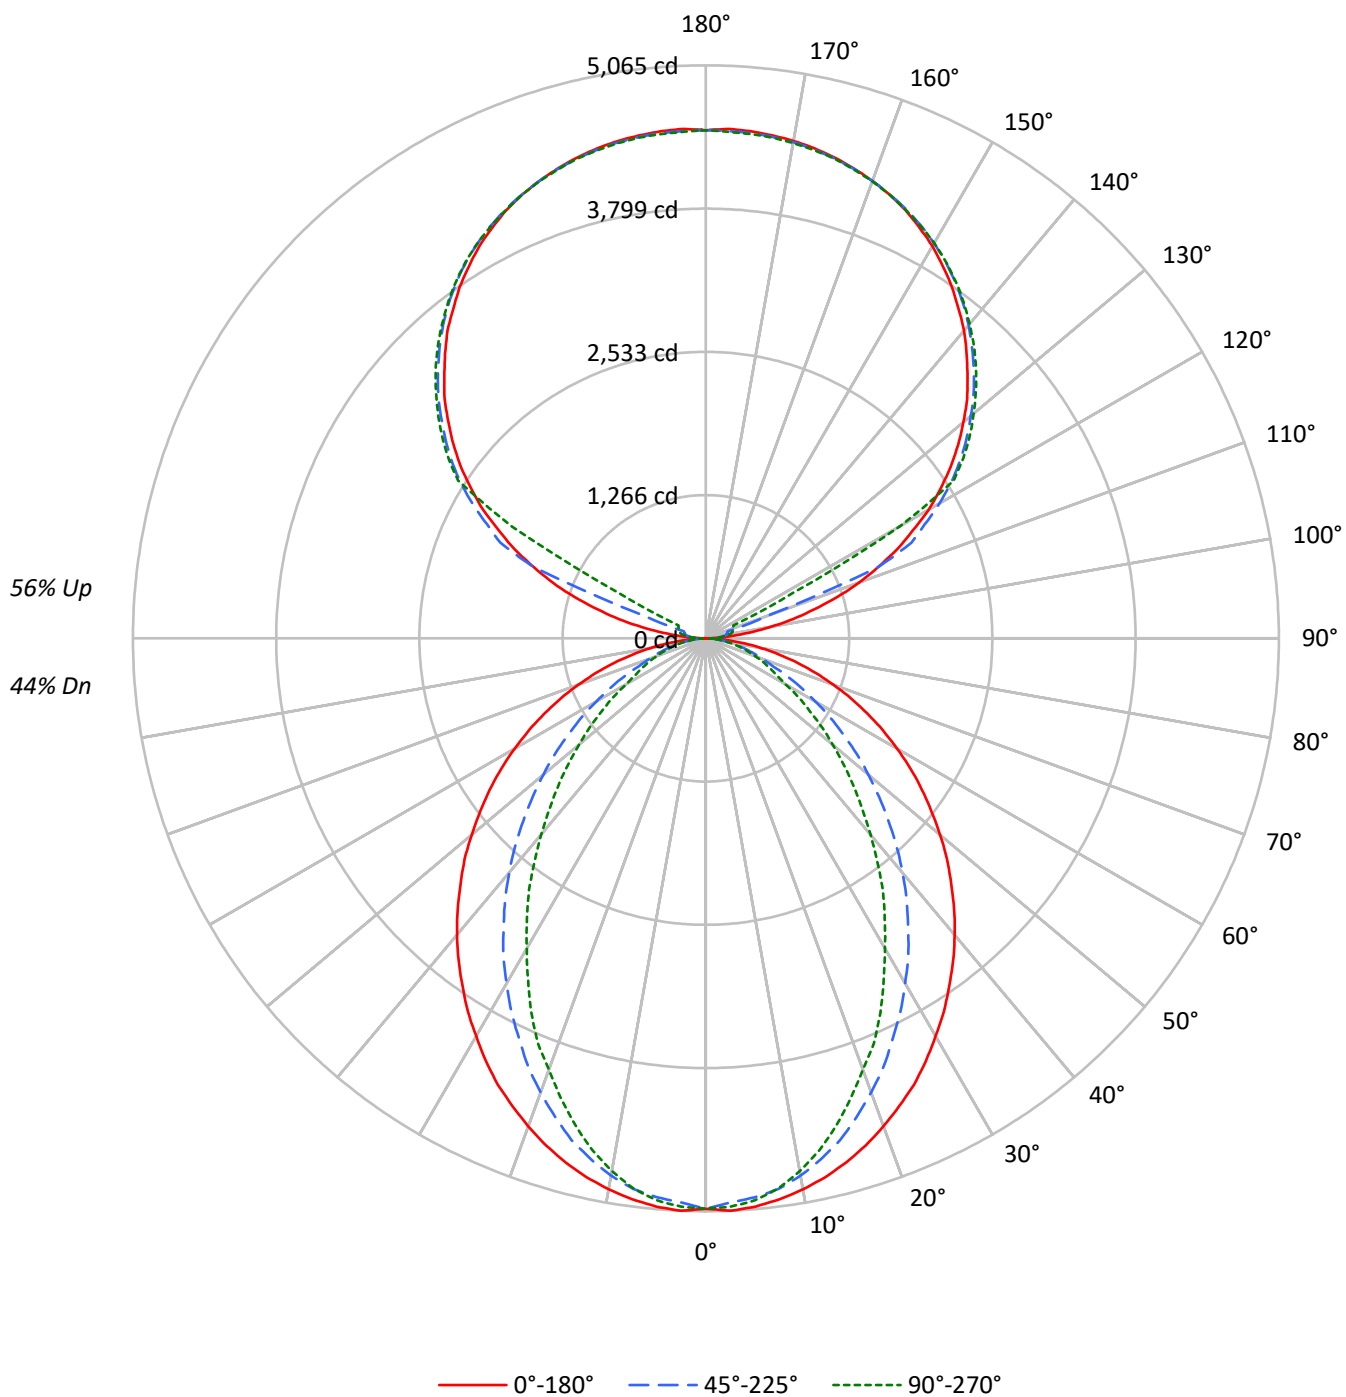

TEST NUMBER: P912083

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51
1	97	93	89	86	89	85	82	79	71	69	67	58	56	55	45	44	44
2	89	81	76	71	81	75	70	66	62	59	56	51	49	46	40	39	37
3	81	72	65	59	74	66	60	55	55	51	47	46	42	40	36	34	32
4	74	64	56	51	68	59	52	47	50	45	41	41	37	34	33	30	28
5	68	57	49	44	62	53	46	41	45	39	35	37	33	30	30	27	25
6	63	51	44	38	58	48	41	36	40	35	31	33	29	26	27	24	22
7	58	46	39	33	53	43	36	31	37	31	27	31	27	24	25	22	20
8	54	42	35	30	50	39	33	28	33	28	24	28	24	21	23	20	18
9	51	39	31	26	46	36	29	25	31	26	22	26	22	19	21	18	16
10	47	35	28	24	43	33	27	22	28	23	20	24	20	17	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5777	5777	5777
5°	5782	5681	5720
10°	5722	5566	5532
15°	5639	5378	5242
20°	5531	5121	4888
25°	5421	4834	4545
30°	5274	4539	4112
35°	5129	4223	3731
40°	4982	3896	3295
45°	4812	3534	2900
50°	4635	3169	2514
55°	4450	2779	2143
60°	4236	2372	1762
65°	3989	1959	1583
70°	3689	1573	1430
75°	3313	1378	1297
80°	2768	1144	1119
85°	1878	745	829

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4812 cd/sqm

TEST NUMBER: P912083

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	472.5	2.0
10°-20°	1297.2	5.5
20°-30°	1821.2	7.7
30°-40°	1985.2	8.4
40°-50°	1824.6	7.7
50°-60°	1433.0	6.1
60°-70°	932.7	4.0
70°-80°	480.1	2.0
80°-90°	130.5	0.6
90°-100°	148.1	0.6
100°-110°	552.1	2.3
110°-120°	1464.2	6.2
120°-130°	2428.5	10.3
130°-140°	2579.6	11.0
140°-150°	2397.5	10.2
150°-160°	1927.5	8.2
160°-170°	1242.0	5.3
170°-180°	427.5	1.8
0°-30°	3590.9	15.3
0°-40°	5576.1	23.7
0°-60°	8833.7	37.5
0°-90°	10377.1	44.1
90°-120°	2164.4	9.2
90°-150°	9570.0	40.6
90°-180°	13167.0	55.9
0°-180°	23544.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5042	5042	5042	5042	5042	
5°	5042	5019	4960	5001	4987	478
15°	4795	4745	4590	4504	4458	1351
25°	4353	4207	3906	3719	3650	2002
35°	3751	3518	3117	2829	2728	2348
45°	3066	2760	2282	1957	1848	2368
55°	2331	1976	1483	1209	1123	2083
65°	1574	1204	794	639	625	1561
75°	839	520	365	333	329	888
85°	196	100	87	87	87	225
90°	3	39	65	81	88	22
95°	211	104	126	143	140	250
105°	988	1086	198	234	247	1056
115°	1869	1924	2005	500	267	1840
125°	2642	2684	2746	2769	2779	2356
135°	3269	3322	3350	3383	3377	2526
145°	3793	3789	3844	3867	3851	2372
155°	4176	4147	4186	4205	4180	1924
165°	4400	4381	4390	4413	4390	1243
175°	4501	4478	4485	4508	4475	428
180°	4491	4491	4491	4491	4491	

TEST NUMBER: P912083

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5041.8	5041.8	5041.8	5041.8	5041.8
2.5°	5064.6	5041.8	4991.5	5037.5	5028.3
5°	5041.8	5019.1	4959.6	5000.7	4987.2
7.5°	5000.7	4973.5	4909.7	4927.6	4904.8
10°	4946.0	4914.0	4823.0	4809.0	4781.9
12.5°	4877.7	4836.6	4713.1	4686.0	4635.6
15°	4795.4	4745.1	4590.2	4503.5	4458.0
17.5°	4699.6	4626.5	4434.8	4334.5	4261.4
20°	4590.2	4498.7	4270.6	4156.9	4056.2
22.5°	4471.6	4366.5	4101.7	3946.8	3878.5
25°	4352.9	4206.8	3905.7	3718.8	3650.1
27.5°	4211.6	4056.2	3723.1	3508.7	3403.6
30°	4061.0	3887.3	3522.3	3289.8	3166.4
32.5°	3914.9	3704.7	3331.0	3057.1	2942.8
35°	3750.7	3517.9	3116.6	2829.1	2728.4
37.5°	3591.1	3339.8	2915.7	2600.5	2486.8
40°	3422.0	3148.6	2705.6	2381.7	2263.1
42.5°	3248.7	2956.8	2496.0	2158.1	2044.3
45°	3066.3	2760.3	2281.5	1957.2	1847.8
47.5°	2892.9	2569.1	2076.3	1751.9	1651.7
50°	2701.2	2377.4	1875.4	1560.3	1464.9
52.5°	2513.9	2171.6	1683.7	1382.6	1295.9
55°	2331.3	1975.6	1482.7	1209.3	1122.6
57.5°	2144.6	1779.5	1305.1	1049.6	976.4
60°	1952.8	1587.9	1117.8	885.4	812.3
62.5°	1766.0	1401.0	958.1	739.3	702.9
65°	1574.2	1204.4	793.9	639.0	624.9
67.5°	1391.8	1021.9	639.0	561.0	547.5
70°	1200.0	844.3	529.1	483.6	465.2
72.5°	1017.5	679.7	442.5	406.1	396.9
75°	839.4	519.9	365.0	333.0	328.7
77.5°	661.7	369.4	287.6	269.2	259.9
80°	497.2	264.8	218.8	201.0	201.0
82.5°	346.6	178.1	150.6	141.4	141.4
85°	196.1	100.3	86.6	86.6	86.6
87.5°	73.1	36.3	36.3	31.9	31.9
90°	3.1	38.9	64.9	81.4	87.6
92.5°	81.4	68.3	78.0	84.5	87.6
95°	211.0	103.8	126.5	143.2	139.7
97.5°	380.2	113.9	165.6	175.6	178.7
100°	575.3	130.1	185.2	211.0	217.7
102.5°	789.6	783.4	191.7	227.3	237.3
105°	987.9	1085.6	198.4	233.9	247.0
107.5°	1218.7	1299.7	204.9	240.4	253.5
110°	1439.8	1507.8	568.8	243.9	256.6

TEST NUMBER: P912083

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1647.9	1706.1	1651.0	250.1	260.1
115°	1868.6	1923.8	2005.2	500.5	266.7
117.5°	2060.4	2125.3	2180.8	1715.7	864.5
120°	2275.0	2323.6	2382.2	2421.3	1982.4
122.5°	2456.8	2508.9	2574.1	2593.4	2596.8
125°	2642.0	2684.4	2746.2	2769.0	2778.6
127.5°	2811.0	2856.6	2905.6	2938.0	2941.1
130°	2970.3	3022.5	3058.0	3093.9	3090.8
132.5°	3132.8	3175.3	3210.8	3240.2	3237.1
135°	3269.4	3321.6	3350.5	3383.3	3376.8
137.5°	3412.3	3451.2	3484.0	3516.4	3506.8
140°	3552.0	3578.2	3613.7	3643.1	3626.9
142.5°	3669.2	3692.1	3734.1	3760.0	3743.8
145°	3792.8	3789.3	3844.5	3867.3	3851.0
147.5°	3899.7	3890.0	3945.3	3961.5	3948.7
150°	4003.8	3981.1	4033.2	4052.5	4036.3
152.5°	4091.4	4065.6	4114.3	4133.9	4111.2
155°	4175.9	4147.0	4186.0	4205.3	4179.5
157.5°	4244.3	4218.4	4247.8	4270.5	4244.3
160°	4302.9	4283.3	4302.9	4322.2	4299.5
162.5°	4354.7	4335.4	4351.6	4374.3	4345.1
165°	4400.2	4380.9	4390.5	4413.4	4390.5
167.5°	4436.1	4416.4	4426.5	4449.2	4419.9
170°	4465.4	4445.8	4452.3	4475.0	4445.8
172.5°	4484.7	4465.4	4472.0	4494.8	4465.4
175°	4500.9	4478.1	4484.7	4507.5	4475.0
177.5°	4507.5	4484.7	4488.2	4511.0	4481.7
180°	4491.3	4491.3	4491.3	4491.3	4491.3

TEST NUMBER: P912083

CATALOG NUMBER: DFN2DIP-SQ3F0-110D120US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.63	13.41	13.64	14.43	15.78	8.59	9.37	9.60	10.39	11.75
	3H	14.30	15.00	15.32	16.02	17.40	9.77	10.47	10.79	11.49	12.87
	4H	14.90	15.56	15.94	16.59	17.98	10.21	10.87	11.25	11.90	13.29
	6H	15.32	15.93	16.36	16.96	18.36	10.52	11.13	11.57	12.17	13.56
	8H	15.44	16.02	16.49	17.07	18.46	10.61	11.19	11.66	12.24	13.63
	12H	15.50	16.05	16.55	17.09	18.51	10.65	11.20	11.70	12.24	13.66
4H	2H	12.64	13.30	13.68	14.33	15.71	9.18	9.84	10.22	10.87	12.25
	3H	14.46	15.01	15.51	16.07	17.46	10.51	11.07	11.56	12.12	13.52
	4H	15.14	15.65	16.20	16.70	18.12	11.05	11.56	12.11	12.61	14.03
	6H	15.65	16.09	16.72	17.16	18.57	11.46	11.90	12.53	12.97	14.38
	8H	15.82	16.23	16.89	17.29	18.72	11.59	11.99	12.65	13.06	14.49
	12H	15.91	16.28	17.00	17.36	18.79	11.65	12.01	12.73	13.09	14.53
8H	4H	15.11	15.51	16.17	16.58	18.01	11.33	11.73	12.39	12.80	14.23
	6H	15.67	16.00	16.75	17.11	18.53	11.84	12.17	12.93	13.28	14.70
	8H	15.88	16.17	16.97	17.26	18.71	12.02	12.32	13.12	13.41	14.85
	12H	16.01	16.27	17.11	17.35	18.84	12.13	12.39	13.23	13.48	14.96
12H	4H	15.06	15.42	16.14	16.50	17.93	11.33	11.70	12.41	12.77	14.21
	6H	15.64	15.93	16.74	17.02	18.47	11.88	12.18	12.98	13.27	14.71
	8H	15.86	16.11	16.95	17.20	18.68	12.09	12.34	13.19	13.43	14.92

END OF REPORT