

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P912105

Luminaire Tested: DFN2DIP-SQ3F0-120D090US850-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P912105
REPORT IS A COMBINATION OF REPORTS P901487 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-120D090US850-FLLONL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 23056.1 lumens
Efficiency: N/A
Efficacy: 118.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 194.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9957
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P912105

CATALOG NUMBER: DFN2DIP-SQ3F0-120D090US850-FLLONL

Luminous Intensity Polar Plot

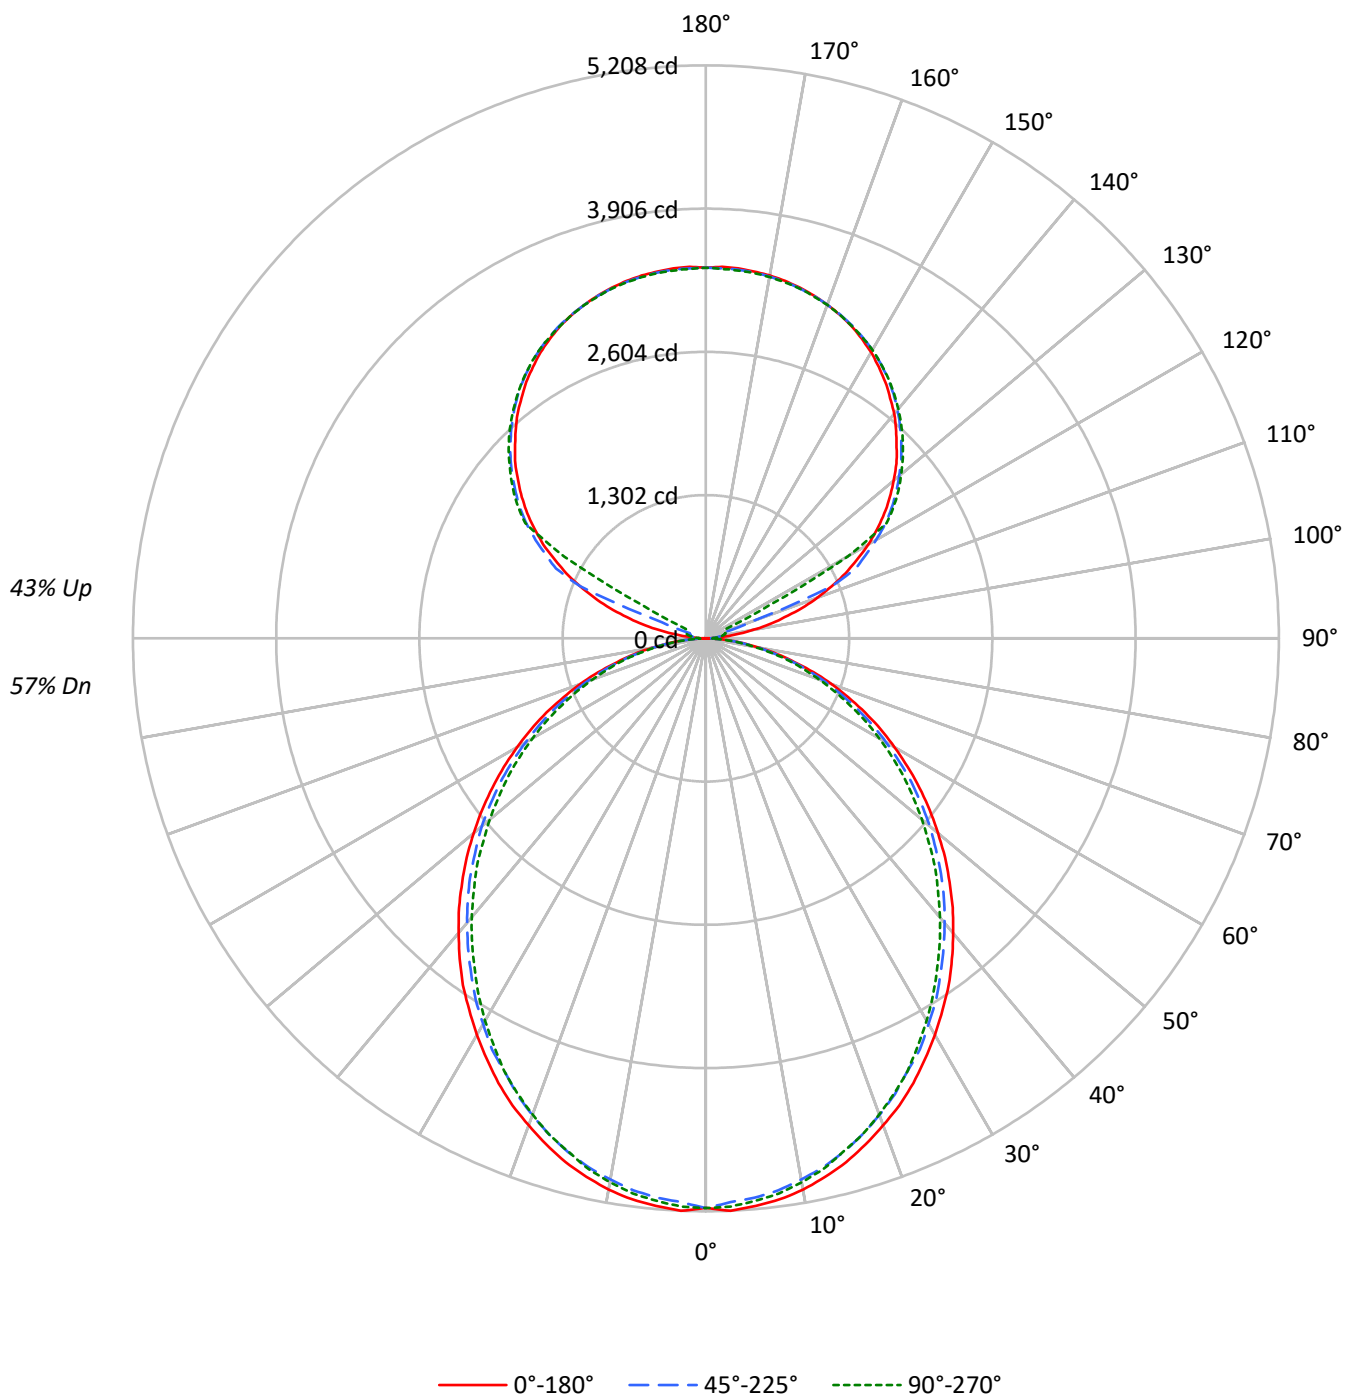

TEST NUMBER: P912105

CATALOG NUMBER: DFN2DIP-SQ3F0-120D090US850-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	63	63	63
1	99	95	91	88	92	89	85	82	77	74	72	66	64	62	55	54	53
2	91	83	77	72	84	77	72	67	67	63	59	58	55	52	49	47	45
3	83	73	66	60	77	68	62	56	59	54	50	51	47	44	43	40	38
4	76	65	57	50	70	61	53	48	53	47	43	45	41	38	39	35	33
5	69	58	49	43	64	54	47	41	47	41	37	41	36	33	35	31	29
6	64	52	44	38	59	49	41	36	43	37	32	37	32	29	32	28	25
7	59	47	39	33	55	44	37	31	39	33	28	34	29	25	29	25	22
8	55	43	35	29	51	40	33	28	35	29	25	31	26	23	27	23	20
9	51	39	31	26	48	37	30	25	32	27	23	28	24	20	25	21	18
10	48	36	28	24	45	34	27	22	30	24	20	26	22	18	23	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5933	5933	5933
5°	5939	5847	5888
10°	5887	5764	5806
15°	5797	5665	5680
20°	5676	5529	5550
25°	5556	5368	5401
30°	5406	5217	5212
35°	5264	5040	5012
40°	5089	4861	4821
45°	4915	4681	4626
50°	4724	4492	4400
55°	4524	4274	4192
60°	4298	4015	3953
65°	4051	3747	3672
70°	3736	3419	3369
75°	3300	3027	3085
80°	2774	2526	2550
85°	1952	1673	1669

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4915 cd/sqm

TEST NUMBER: P912105

CATALOG NUMBER: DFN2DIP-SQ3F0-120D090US850-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	487.4	2.1
10°-20°	1371.3	5.9
20°-30°	2015.2	8.7
30°-40°	2340.6	10.2
40°-50°	2337.7	10.1
50°-60°	2038.4	8.8
60°-70°	1506.8	6.5
70°-80°	852.5	3.7
80°-90°	230.9	1.0
90°-100°	111.1	0.5
100°-110°	414.0	1.8
110°-120°	1098.2	4.8
120°-130°	1821.4	7.9
130°-140°	1934.7	8.4
140°-150°	1798.1	7.8
150°-160°	1445.6	6.3
160°-170°	931.5	4.0
170°-180°	320.6	1.4
0°-30°	3873.9	16.8
0°-40°	6214.5	27.0
0°-60°	10590.5	45.9
0°-90°	13180.8	57.2
90°-120°	1623.3	7.0
90°-150°	7177.5	31.1
90°-180°	9875.0	42.8
0°-180°	23056.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5178	5178	5178	5178	5178	
5°	5178	5159	5104	5143	5134	492
15°	4929	4900	4835	4855	4830	1388
25°	4461	4422	4337	4347	4337	2053
35°	3849	3799	3720	3690	3665	2404
45°	3132	3097	3022	2968	2948	2417
55°	2370	2340	2280	2221	2196	2119
65°	1599	1568	1519	1474	1449	1581
75°	836	827	801	772	782	893
85°	204	199	194	179	174	227
90°	2	29	49	61	66	21
95°	158	78	95	107	105	188
105°	741	814	149	175	185	792
115°	1401	1443	1504	375	200	1380
125°	1982	2013	2060	2077	2084	1767
135°	2452	2491	2513	2538	2533	1894
145°	2845	2842	2883	2900	2888	1779
155°	3132	3110	3140	3154	3135	1443
165°	3300	3286	3293	3310	3293	932
175°	3376	3359	3364	3381	3356	321
180°	3368	3368	3368	3368	3368	

TEST NUMBER: P912105

CATALOG NUMBER: DFN2DIP-SQ3F0-120D090US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5178.3	5178.3	5178.3	5178.3	5178.3
2.5°	5208.3	5183.5	5128.6	5178.3	5168.7
5°	5178.3	5158.6	5103.7	5143.3	5133.8
7.5°	5143.3	5113.7	5058.8	5099.0	5089.0
10°	5089.0	5054.0	4994.4	5034.0	5019.2
12.5°	5013.9	4984.3	4924.6	4949.5	4939.4
15°	4929.4	4899.8	4834.8	4854.9	4830.0
17.5°	4824.8	4795.2	4730.2	4755.1	4730.2
20°	4710.1	4680.5	4610.9	4625.6	4606.1
22.5°	4596.0	4551.1	4486.1	4486.1	4476.1
25°	4461.3	4421.7	4337.2	4346.7	4337.2
27.5°	4311.8	4277.0	4212.5	4197.7	4172.9
30°	4162.9	4122.7	4048.2	4033.4	4013.4
32.5°	4003.3	3973.8	3893.9	3863.9	3843.8
35°	3849.0	3799.4	3719.6	3689.5	3664.7
37.5°	3674.7	3629.9	3550.0	3515.2	3490.4
40°	3495.7	3455.5	3375.7	3331.3	3311.3
42.5°	3321.3	3281.2	3201.9	3151.8	3122.2
45°	3132.1	3097.3	3022.2	2967.9	2947.8
47.5°	2947.8	2912.9	2833.2	2778.3	2748.7
50°	2753.4	2728.6	2658.8	2589.1	2564.2
52.5°	2564.2	2529.4	2465.0	2410.0	2375.1
55°	2370.4	2340.3	2280.5	2220.9	2196.0
57.5°	2176.0	2151.1	2086.1	2026.5	2006.4
60°	1981.6	1962.0	1892.3	1837.4	1822.5
62.5°	1792.5	1757.5	1708.0	1658.3	1638.2
65°	1598.6	1568.5	1518.8	1473.9	1449.1
67.5°	1399.4	1374.1	1329.7	1294.9	1274.8
70°	1215.0	1194.9	1150.0	1115.2	1095.7
72.5°	1025.9	1005.9	981.0	946.2	931.3
75°	836.3	826.8	801.4	771.9	781.8
77.5°	667.2	647.1	637.1	622.3	607.5
80°	498.2	492.8	482.9	468.1	458.0
82.5°	338.6	338.6	333.9	313.8	313.8
85°	203.9	199.2	194.4	179.1	174.3
87.5°	89.8	79.7	69.8	54.9	49.7
90°	2.3	29.3	48.6	61.1	65.7
92.5°	61.1	51.2	58.4	63.4	65.7
95°	158.4	77.9	94.9	107.4	104.8
97.5°	285.1	85.4	124.2	131.6	134.0
100°	431.5	97.6	139.0	158.4	163.2
102.5°	592.2	587.5	143.8	170.5	178.0
105°	740.9	814.2	148.7	175.4	185.2
107.5°	914.0	974.8	153.7	180.3	190.2
110°	1079.8	1130.8	426.6	182.9	192.5

TEST NUMBER: P912105

CATALOG NUMBER: DFN2DIP-SQ3F0-120D090US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1235.9	1279.6	1238.2	187.5	195.1
115°	1401.4	1442.8	1503.9	375.4	200.0
117.5°	1545.3	1594.0	1635.6	1286.9	648.3
120°	1706.2	1742.7	1786.7	1815.9	1486.8
122.5°	1842.6	1881.6	1930.5	1945.0	1947.6
125°	1981.5	2013.3	2059.6	2076.7	2083.9
127.5°	2108.2	2142.4	2179.2	2203.5	2205.8
130°	2227.8	2266.9	2293.5	2320.4	2318.1
132.5°	2349.6	2381.5	2408.1	2430.2	2427.8
135°	2452.1	2491.1	2512.9	2537.5	2532.6
137.5°	2559.2	2588.4	2613.0	2637.3	2630.1
140°	2663.9	2683.7	2710.3	2732.2	2720.2
142.5°	2752.0	2769.1	2800.6	2820.0	2807.9
145°	2844.6	2841.9	2883.4	2900.5	2888.3
147.5°	2924.8	2917.6	2958.9	2971.1	2961.5
150°	3003.0	2985.9	3024.9	3039.3	3027.2
152.5°	3068.6	3049.2	3085.7	3100.4	3083.4
155°	3132.0	3110.3	3139.5	3154.0	3134.6
157.5°	3183.3	3163.9	3185.8	3202.9	3183.3
160°	3227.2	3212.4	3227.2	3241.7	3224.6
162.5°	3266.0	3251.5	3263.7	3280.8	3258.8
165°	3300.2	3285.6	3293.0	3310.0	3293.0
167.5°	3327.1	3312.4	3319.8	3336.9	3314.9
170°	3349.1	3334.3	3339.2	3356.3	3334.3
172.5°	3363.6	3349.1	3353.9	3371.0	3349.1
175°	3375.7	3358.6	3363.6	3380.6	3356.3
177.5°	3380.6	3363.6	3366.1	3383.2	3361.3
180°	3368.5	3368.5	3368.5	3368.5	3368.5

TEST NUMBER: P912105

CATALOG NUMBER: DFN2DIP-SQ3F0-120D090US850-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.06	14.99	14.95	15.90	17.07	13.62	14.55	14.51	15.46	16.62
	3H	15.72	16.56	16.63	17.48	18.67	15.23	16.07	16.14	16.99	18.18
	4H	16.31	17.10	17.23	18.03	19.23	15.82	16.60	16.74	17.53	18.73
	6H	16.71	17.44	17.64	18.37	19.58	16.21	16.94	17.14	17.87	19.08
	8H	16.81	17.51	17.75	18.46	19.67	16.31	17.01	17.25	17.96	19.17
	12H	16.86	17.52	17.81	18.47	19.70	16.35	17.01	17.30	17.96	19.20
4H	2H	14.53	15.32	15.45	16.24	17.44	14.17	14.96	15.10	15.89	17.09
	3H	16.39	17.05	17.33	18.01	19.22	15.99	16.64	16.92	17.60	18.82
	4H	17.11	17.71	18.05	18.66	19.90	16.68	17.28	17.63	18.24	19.48
	6H	17.62	18.14	18.58	19.12	20.36	17.19	17.71	18.15	18.68	19.92
	8H	17.77	18.25	18.73	19.23	20.48	17.33	17.82	18.29	18.79	20.04
	12H	17.84	18.28	18.82	19.27	20.53	17.40	17.83	18.38	18.82	20.08
8H	4H	17.30	17.79	18.27	18.76	20.01	16.93	17.41	17.89	18.38	19.64
	6H	17.93	18.33	18.92	19.35	20.60	17.55	17.95	18.54	18.96	20.21
	8H	18.15	18.50	19.15	19.51	20.77	17.76	18.11	18.75	19.11	20.38
	12H	18.28	18.59	19.28	19.59	20.90	17.87	18.18	18.87	19.18	20.49
12H	4H	17.29	17.73	18.27	18.72	19.98	16.92	17.36	17.90	18.35	19.61
	6H	17.96	18.32	18.96	19.32	20.59	17.59	17.94	18.58	18.94	20.21
	8H	18.20	18.51	19.20	19.51	20.82	17.82	18.13	18.82	19.13	20.44