

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914526

Luminaire Tested: DFN2DIP-SQ3F0-040D040US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914526
REPORT IS A COMBINATION OF REPORTS P899862 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-040D040US927-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5497.7 lumens
Efficiency: N/A
Efficacy: 87.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 62.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914526

CATALOG NUMBER: DFN2DIP-SQ3F0-040D040US927-RLLFLL

Luminous Intensity Polar Plot

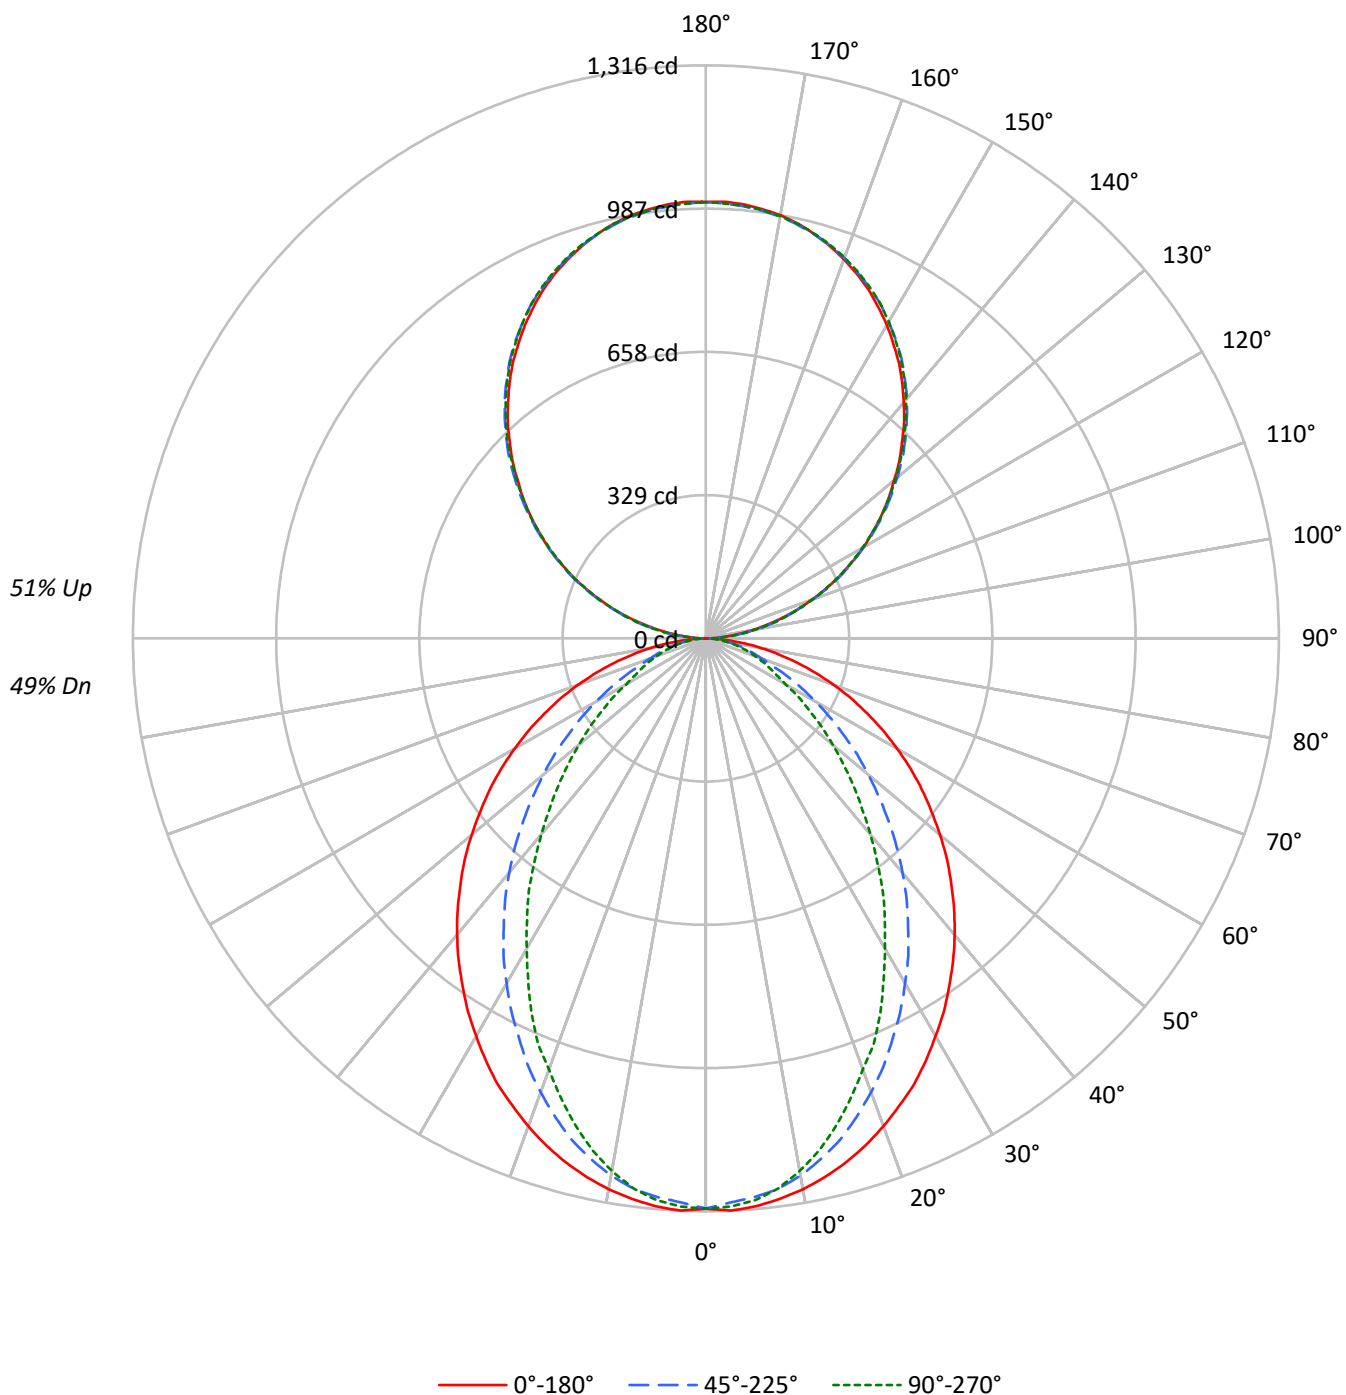

TEST NUMBER: P914526

CATALOG NUMBER: DFN2DIP-SQ3F0-040D040US927-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1501	1501	1501
5°	1502	1476	1486
10°	1486	1446	1437
15°	1465	1397	1362
20°	1437	1330	1270
25°	1408	1256	1181
30°	1370	1179	1068
35°	1332	1097	969
40°	1294	1012	856
45°	1250	918	753
50°	1204	823	653
55°	1156	722	557
60°	1100	616	458
65°	1036	509	411
70°	958	409	371
75°	860	358	337
80°	719	297	291
85°	487	194	215

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1250 cd/sqm

TEST NUMBER: P914526

CATALOG NUMBER: DFN2DIP-SQ3F0-040D040US927-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.7	2.2
10°-20°	336.9	6.1
20°-30°	473.1	8.6
30°-40°	515.7	9.4
40°-50°	473.9	8.6
50°-60°	372.2	6.8
60°-70°	242.3	4.4
70°-80°	124.7	2.3
80°-90°	34.7	0.6
90°-100°	62.0	1.1
100°-110°	197.0	3.6
110°-120°	337.2	6.1
120°-130°	443.5	8.1
130°-140°	497.8	9.1
140°-150°	488.1	8.9
150°-160°	409.5	7.4
160°-170°	271.5	4.9
170°-180°	94.9	1.7
0°-30°	932.7	17.0
0°-40°	1448.4	26.3
0°-60°	2294.6	41.7
0°-90°	2696.2	49.0
90°-120°	596.2	10.8
90°-150°	2025.6	36.8
90°-180°	2801.0	50.9
0°-180°	5497.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1310	1310	1310	1310	1310	
5°	1310	1304	1288	1299	1296	124
15°	1246	1233	1192	1170	1158	351
25°	1131	1093	1014	966	948	520
35°	974	914	810	735	709	610
45°	796	717	593	508	480	615
55°	606	513	385	314	292	541
65°	409	313	206	166	162	405
75°	218	135	95	86	85	231
85°	51	26	22	22	22	58
90°	1	11	30	28	29	5
95°	44	53	54	54	53	49
105°	182	184	186	188	188	192
115°	338	343	342	341	338	335
125°	492	500	497	495	494	440
135°	637	646	648	647	644	492
145°	773	779	784	785	781	483
155°	884	886	889	893	890	407
165°	961	960	960	966	962	271
175°	1000	998	996	1002	997	95
180°	1002	1002	1002	1002	1002	

TEST NUMBER: P914526

CATALOG NUMBER: DFN2DIP-SQ3F0-040D040US927-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1309.6	1309.6	1309.6	1309.6	1309.6
2.5°	1315.6	1309.6	1296.6	1308.5	1306.1
5°	1309.6	1303.7	1288.2	1298.9	1295.5
7.5°	1298.9	1291.9	1275.3	1279.9	1274.1
10°	1284.8	1276.4	1252.8	1249.1	1242.1
12.5°	1267.0	1256.3	1224.2	1217.2	1204.1
15°	1245.6	1232.6	1192.3	1169.8	1158.0
17.5°	1220.8	1201.7	1151.9	1125.9	1106.9
20°	1192.3	1168.5	1109.3	1079.7	1053.6
22.5°	1161.5	1134.2	1065.4	1025.2	1007.5
25°	1130.7	1092.7	1014.5	966.0	948.1
27.5°	1094.0	1053.6	967.1	911.4	884.1
30°	1054.9	1009.7	914.9	854.5	822.5
32.5°	1016.9	962.3	865.2	794.1	764.4
35°	974.3	913.8	809.5	734.8	708.7
37.5°	932.8	867.5	757.3	675.5	645.9
40°	888.9	817.8	702.8	618.7	587.9
42.5°	843.8	768.0	648.3	560.5	531.0
45°	796.5	717.0	592.6	508.4	480.0
47.5°	751.5	667.3	539.3	455.1	429.0
50°	701.6	617.5	487.1	405.3	380.5
52.5°	653.0	564.1	437.4	359.1	336.6
55°	605.6	513.2	385.2	314.1	291.6
57.5°	557.1	462.2	339.0	272.6	253.7
60°	507.2	412.4	290.3	230.0	211.0
62.5°	458.8	363.9	248.8	192.0	182.6
65°	408.9	312.8	206.2	166.0	162.3
67.5°	361.6	265.5	166.0	145.8	142.2
70°	311.7	219.3	137.4	125.6	120.8
72.5°	264.4	176.6	114.9	105.5	103.1
75°	218.0	135.1	94.8	86.5	85.4
77.5°	171.9	95.9	74.7	69.9	67.5
80°	129.1	68.8	56.8	52.2	52.2
82.5°	90.1	46.3	39.1	36.7	36.7
85°	50.9	26.1	22.5	22.5	22.5
87.5°	19.0	9.4	9.4	8.3	8.3
90°	0.9	10.9	29.6	27.8	28.7
92.5°	18.7	25.3	26.3	27.2	27.2
95°	44.1	52.6	54.1	54.1	52.6
97.5°	73.4	81.3	84.6	84.6	84.6
100°	107.3	114.2	116.6	116.6	115.7
102.5°	142.9	148.1	151.4	152.3	151.4
105°	181.9	184.3	186.1	187.6	187.6
107.5°	220.5	224.2	224.2	224.7	220.5
110°	258.0	262.8	262.8	262.8	260.5

TEST NUMBER: P914526

CATALOG NUMBER: DFN2DIP-SQ3F0-040D040US927-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	298.5	303.6	302.7	300.3	298.5
115°	338.3	343.3	341.7	340.8	338.3
117.5°	377.9	384.6	380.4	377.9	375.6
120°	417.9	424.5	417.9	417.9	415.1
122.5°	454.1	462.6	458.4	455.9	454.1
125°	492.2	499.7	497.3	494.6	493.7
127.5°	529.3	538.7	535.4	531.7	529.3
130°	564.0	575.0	573.5	571.6	568.3
132.5°	603.0	611.5	612.1	607.8	605.5
135°	636.6	645.9	647.8	646.8	644.4
137.5°	674.1	681.6	683.1	682.5	678.9
140°	706.9	714.5	718.7	718.7	715.4
142.5°	740.8	748.4	750.8	751.7	748.4
145°	772.9	778.9	783.7	784.7	781.3
147.5°	801.5	809.1	812.7	814.2	810.9
150°	831.2	836.3	839.6	842.3	839.6
152.5°	857.5	862.5	866.8	870.1	866.8
155°	883.7	886.1	888.8	893.1	890.3
157.5°	906.4	908.2	909.7	915.8	911.5
160°	926.6	928.4	929.3	934.5	930.8
162.5°	945.3	945.3	946.3	952.0	947.8
165°	961.4	960.4	960.4	966.5	962.3
167.5°	975.9	973.1	973.1	979.2	974.9
170°	986.7	984.3	983.4	989.4	984.3
172.5°	994.3	991.9	990.9	997.0	991.9
175°	1000.4	997.9	996.1	1002.1	997.0
177.5°	1003.7	1001.2	999.4	1004.6	999.4
180°	1002.1	1002.1	1002.1	1002.1	1002.1

TEST NUMBER: P914526

CATALOG NUMBER: DFN2DIP-SQ3F0-040D040US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.43	9.25	9.40	10.23	11.52	4.39	5.21	5.36	6.20	7.48
	3H	10.10	10.84	11.09	11.83	13.14	5.57	6.31	6.56	7.30	8.61
	4H	10.71	11.40	11.71	12.40	13.72	6.02	6.71	7.02	7.71	9.03
	6H	11.13	11.77	12.13	12.77	14.10	6.33	6.97	7.34	7.97	9.30
	8H	11.25	11.86	12.26	12.87	14.20	6.42	7.03	7.43	8.05	9.37
	12H	11.31	11.89	12.33	12.90	14.25	6.46	7.04	7.48	8.05	9.40
4H	2H	8.45	9.14	9.45	10.14	11.45	4.98	5.68	5.99	6.67	7.99
	3H	10.27	10.85	11.28	11.87	13.20	6.33	6.90	7.34	7.93	9.26
	4H	10.96	11.49	11.98	12.50	13.86	6.87	7.40	7.89	8.41	9.77
	6H	11.47	11.92	12.50	12.96	14.31	7.28	7.73	8.31	8.77	10.12
	8H	11.64	12.06	12.67	13.10	14.46	7.40	7.83	8.44	8.86	10.23
	12H	11.73	12.12	12.78	13.16	14.53	7.47	7.85	8.51	8.89	10.27
8H	4H	10.92	11.35	11.95	12.38	13.75	7.14	7.57	8.18	8.60	9.97
	6H	11.48	11.83	12.54	12.91	14.27	7.65	8.00	8.71	9.08	10.44
	8H	11.70	12.00	12.76	13.06	14.45	7.84	8.15	8.90	9.21	10.59
	12H	11.83	12.10	12.90	13.16	14.58	7.95	8.22	9.02	9.28	10.70
12H	4H	10.88	11.26	11.92	12.30	13.68	7.15	7.53	8.20	8.58	9.95
	6H	11.46	11.77	12.52	12.83	14.21	7.70	8.01	8.76	9.07	10.45
	8H	11.68	11.95	12.74	13.00	14.42	7.91	8.18	8.97	9.23	10.66

END OF REPORT