

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914793

Luminaire Tested: DFN2DIP-SQ3F0-110D080US927-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914793
REPORT IS A COMBINATION OF REPORTS P901467 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-110D080US927-FLLONL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14900.9 lumens
Efficiency: N/A
Efficacy: 86.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 172.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914793

CATALOG NUMBER: DFN2DIP-SQ3F0-110D080US927-FLLONL

Luminous Intensity Polar Plot

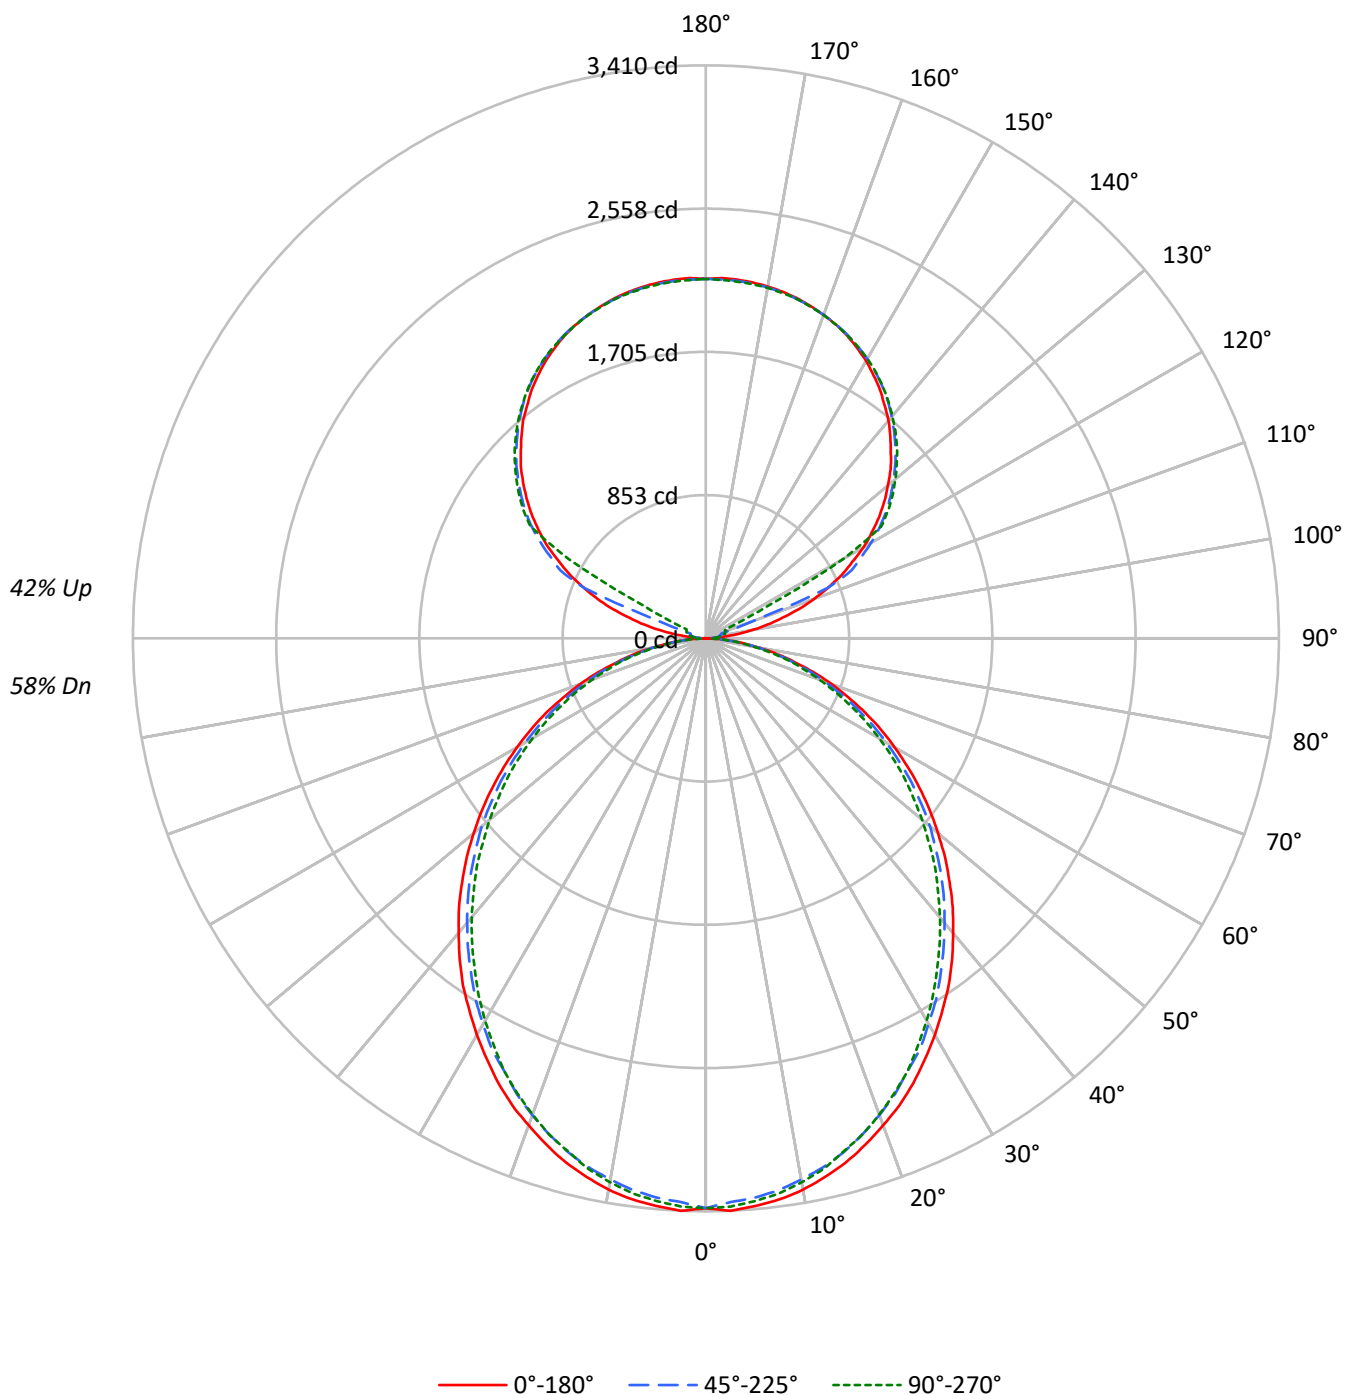

TEST NUMBER: P914793

CATALOG NUMBER: DFN2DIP-SQ3F0-110D080US927-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	63	63	63
1	100	95	91	88	93	89	85	82	77	74	72	66	64	63	56	55	54
2	91	83	77	72	84	78	72	68	67	63	60	58	55	52	49	47	45
3	83	73	66	60	77	68	62	57	60	54	50	51	47	44	44	41	38
4	76	65	57	51	70	61	54	48	53	47	43	46	41	38	39	36	33
5	70	58	50	43	65	54	47	41	47	42	37	41	37	33	35	32	29
6	64	52	44	38	60	49	41	36	43	37	32	37	32	29	32	28	25
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	29	26	23
8	55	43	35	29	51	40	33	28	35	30	25	31	26	23	27	23	20
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	18
10	48	36	28	24	45	34	27	23	30	24	21	26	22	19	23	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3885	3885	3885
5°	3889	3828	3855
10°	3855	3774	3802
15°	3796	3709	3719
20°	3717	3621	3634
25°	3638	3515	3537
30°	3540	3416	3413
35°	3447	3300	3282
40°	3332	3183	3157
45°	3218	3065	3029
50°	3093	2942	2881
55°	2963	2799	2745
60°	2814	2629	2589
65°	2652	2454	2404
70°	2446	2239	2206
75°	2161	1982	2021
80°	1816	1654	1670
85°	1279	1096	1094

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3218 cd/sqm

TEST NUMBER: P914793

CATALOG NUMBER: DFN2DIP-SQ3F0-110D080US927-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	319.1	2.1
10°-20°	897.9	6.0
20°-30°	1319.6	8.9
30°-40°	1532.6	10.3
40°-50°	1530.7	10.3
50°-60°	1334.7	9.0
60°-70°	986.7	6.6
70°-80°	558.2	3.7
80°-90°	151.1	1.0
90°-100°	70.5	0.5
100°-110°	262.9	1.8
110°-120°	697.3	4.7
120°-130°	1156.5	7.8
130°-140°	1228.4	8.2
140°-150°	1141.7	7.7
150°-160°	917.9	6.2
160°-170°	591.5	4.0
170°-180°	203.6	1.4
0°-30°	2536.6	17.0
0°-40°	4069.2	27.3
0°-60°	6934.6	46.5
0°-90°	8630.6	57.9
90°-120°	1030.7	6.9
90°-150°	4557.3	30.6
90°-180°	6270.0	42.1
0°-180°	14900.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3391	3391	3391	3391	3391	
5°	3391	3378	3342	3368	3362	322
15°	3228	3208	3166	3179	3163	909
25°	2921	2895	2840	2846	2840	1344
35°	2520	2488	2436	2416	2400	1574
45°	2051	2028	1979	1943	1930	1583
55°	1552	1532	1493	1454	1438	1388
65°	1047	1027	994	965	949	1035
75°	548	541	525	505	512	585
85°	134	130	127	117	114	149
90°	2	18	31	39	42	14
95°	100	49	60	68	66	119
105°	470	517	94	111	118	503
115°	890	916	955	238	127	876
125°	1258	1278	1308	1319	1323	1122
135°	1557	1582	1596	1611	1608	1203
145°	1806	1804	1831	1842	1834	1130
155°	1989	1975	1993	2003	1990	916
165°	2096	2086	2091	2102	2091	592
175°	2143	2133	2136	2146	2131	204
180°	2139	2139	2139	2139	2139	

TEST NUMBER: P914793

CATALOG NUMBER: DFN2DIP-SQ3F0-110D080US927-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3390.7	3390.7	3390.7	3390.7	3390.7
2.5°	3410.3	3394.1	3358.1	3390.7	3384.4
5°	3390.7	3377.9	3341.9	3367.8	3361.6
7.5°	3367.8	3348.5	3312.5	3338.8	3332.2
10°	3332.2	3309.3	3270.3	3296.2	3286.5
12.5°	3283.1	3263.7	3224.7	3240.9	3234.3
15°	3227.7	3208.3	3165.8	3178.9	3162.7
17.5°	3159.2	3139.9	3097.3	3113.6	3097.3
20°	3084.2	3064.8	3019.2	3028.8	3016.1
22.5°	3009.5	2980.0	2937.5	2937.5	2930.9
25°	2921.2	2895.3	2840.0	2846.2	2840.0
27.5°	2823.3	2800.5	2758.3	2748.6	2732.4
30°	2725.8	2699.5	2650.7	2641.1	2627.9
32.5°	2621.3	2602.0	2549.7	2530.0	2516.8
35°	2520.3	2487.8	2435.6	2415.8	2399.6
37.5°	2406.2	2376.8	2324.6	2301.7	2285.4
40°	2288.9	2262.6	2210.4	2181.4	2168.2
42.5°	2174.8	2148.5	2096.6	2063.7	2044.4
45°	2051.0	2028.1	1978.9	1943.4	1930.2
47.5°	1930.2	1907.4	1855.1	1819.2	1799.8
50°	1802.9	1786.7	1741.0	1695.3	1679.1
52.5°	1679.1	1656.2	1614.1	1578.0	1555.2
55°	1552.1	1532.4	1493.3	1454.2	1438.0
57.5°	1424.8	1408.6	1366.0	1326.9	1313.8
60°	1297.5	1284.8	1239.1	1203.1	1193.4
62.5°	1173.7	1150.9	1118.3	1085.8	1072.7
65°	1046.7	1027.0	994.5	965.1	948.9
67.5°	916.3	899.8	870.7	847.9	834.7
70°	795.6	782.4	753.0	730.2	717.4
72.5°	671.8	658.6	642.4	619.6	609.8
75°	547.6	541.4	524.7	505.4	512.0
77.5°	436.9	423.7	417.2	407.5	397.8
80°	326.2	322.7	316.2	306.5	299.9
82.5°	221.7	221.7	218.6	205.5	205.5
85°	133.6	130.4	127.3	117.2	114.2
87.5°	58.8	52.2	45.6	36.0	32.5
90°	1.5	18.5	30.9	38.7	41.7
92.5°	38.7	32.6	37.2	40.2	41.7
95°	100.5	49.4	60.3	68.2	66.5
97.5°	181.0	54.2	78.8	83.7	85.1
100°	274.0	61.9	88.2	100.5	103.6
102.5°	376.0	373.0	91.3	108.2	113.0
105°	470.5	517.0	94.4	111.4	117.6
107.5°	580.4	618.9	97.6	114.5	120.7
110°	685.7	718.0	270.9	116.1	122.2

TEST NUMBER: P914793

CATALOG NUMBER: DFN2DIP-SQ3F0-110D080US927-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	784.7	812.5	786.2	119.1	123.9
115°	889.9	916.2	954.9	238.4	127.0
117.5°	981.2	1012.1	1038.5	817.1	411.7
120°	1083.4	1106.5	1134.5	1153.0	944.0
122.5°	1169.9	1194.8	1225.8	1235.0	1236.7
125°	1258.1	1278.3	1307.7	1318.6	1323.2
127.5°	1338.6	1360.3	1383.7	1399.1	1400.6
130°	1414.5	1439.3	1456.3	1473.4	1471.9
132.5°	1491.9	1512.1	1529.1	1543.0	1541.5
135°	1557.0	1581.7	1595.5	1611.2	1608.0
137.5°	1625.0	1643.5	1659.1	1674.6	1670.0
140°	1691.5	1704.0	1720.9	1734.9	1727.1
142.5°	1747.4	1758.2	1778.2	1790.6	1782.8
145°	1806.2	1804.5	1830.8	1841.7	1833.9
147.5°	1857.1	1852.5	1878.7	1886.5	1880.4
150°	1906.7	1895.8	1920.6	1929.8	1922.1
152.5°	1948.4	1936.1	1959.2	1968.6	1957.8
155°	1988.7	1974.9	1993.4	2002.6	1990.4
157.5°	2021.2	2008.9	2022.8	2033.7	2021.2
160°	2049.1	2039.8	2049.1	2058.3	2047.5
162.5°	2073.8	2064.6	2072.3	2083.1	2069.2
165°	2095.5	2086.3	2090.9	2101.7	2090.9
167.5°	2112.5	2103.2	2107.9	2118.8	2104.8
170°	2126.5	2117.1	2120.3	2131.1	2117.1
172.5°	2135.7	2126.5	2129.6	2140.5	2126.5
175°	2143.4	2132.6	2135.7	2146.5	2131.1
177.5°	2146.5	2135.7	2137.3	2148.2	2134.2
180°	2138.8	2138.8	2138.8	2138.8	2138.8

TEST NUMBER: P914793

CATALOG NUMBER: DFN2DIP-SQ3F0-110D080US927-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.65	13.59	13.54	14.50	15.65	12.21	13.15	13.10	14.05	15.21
	3H	14.32	15.16	15.21	16.07	17.25	13.83	14.67	14.72	15.58	16.76
	4H	14.90	15.70	15.82	16.62	17.81	14.41	15.20	15.32	16.13	17.31
	6H	15.30	16.04	16.23	16.96	18.17	14.80	15.54	15.73	16.46	17.67
	8H	15.41	16.11	16.34	17.05	18.25	14.91	15.61	15.84	16.55	17.75
	12H	15.46	16.12	16.40	17.06	18.29	14.95	15.61	15.89	16.55	17.78
4H	2H	13.12	13.92	14.04	14.84	16.03	12.77	13.56	13.68	14.48	15.67
	3H	14.99	15.65	15.92	16.60	17.81	14.58	15.24	15.51	16.20	17.40
	4H	15.70	16.31	16.64	17.25	18.48	15.28	15.88	16.22	16.83	18.06
	6H	16.22	16.74	17.17	17.71	18.94	15.78	16.31	16.74	17.28	18.51
	8H	16.37	16.85	17.32	17.82	19.06	15.93	16.42	16.88	17.38	18.62
	12H	16.44	16.88	17.41	17.86	19.11	15.99	16.43	16.97	17.41	18.66
8H	4H	15.90	16.39	16.85	17.35	18.60	15.52	16.01	16.48	16.98	18.22
	6H	16.53	16.93	17.51	17.94	19.18	16.14	16.55	17.13	17.55	18.80
	8H	16.75	17.10	17.74	18.10	19.36	16.35	16.71	17.34	17.71	18.96
	12H	16.88	17.19	17.87	18.18	19.49	16.47	16.78	17.46	17.77	19.08
12H	4H	15.89	16.33	16.86	17.31	18.56	15.52	15.96	16.49	16.94	18.19
	6H	16.56	16.91	17.55	17.91	19.17	16.18	16.54	17.17	17.54	18.80
	8H	16.80	17.11	17.79	18.10	19.41	16.42	16.73	17.41	17.72	19.03