

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914825

Luminaire Tested: DFN2DIP-SQ3F0-120D070US927-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914825
REPORT IS A COMBINATION OF REPORTS P901451 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-120D070US927-FLLONL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14900.9 lumens
Efficiency: N/A
Efficacy: 83.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 178.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9957
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914825

CATALOG NUMBER: DFN2DIP-SQ3F0-120D070US927-FLLONL

Luminous Intensity Polar Plot

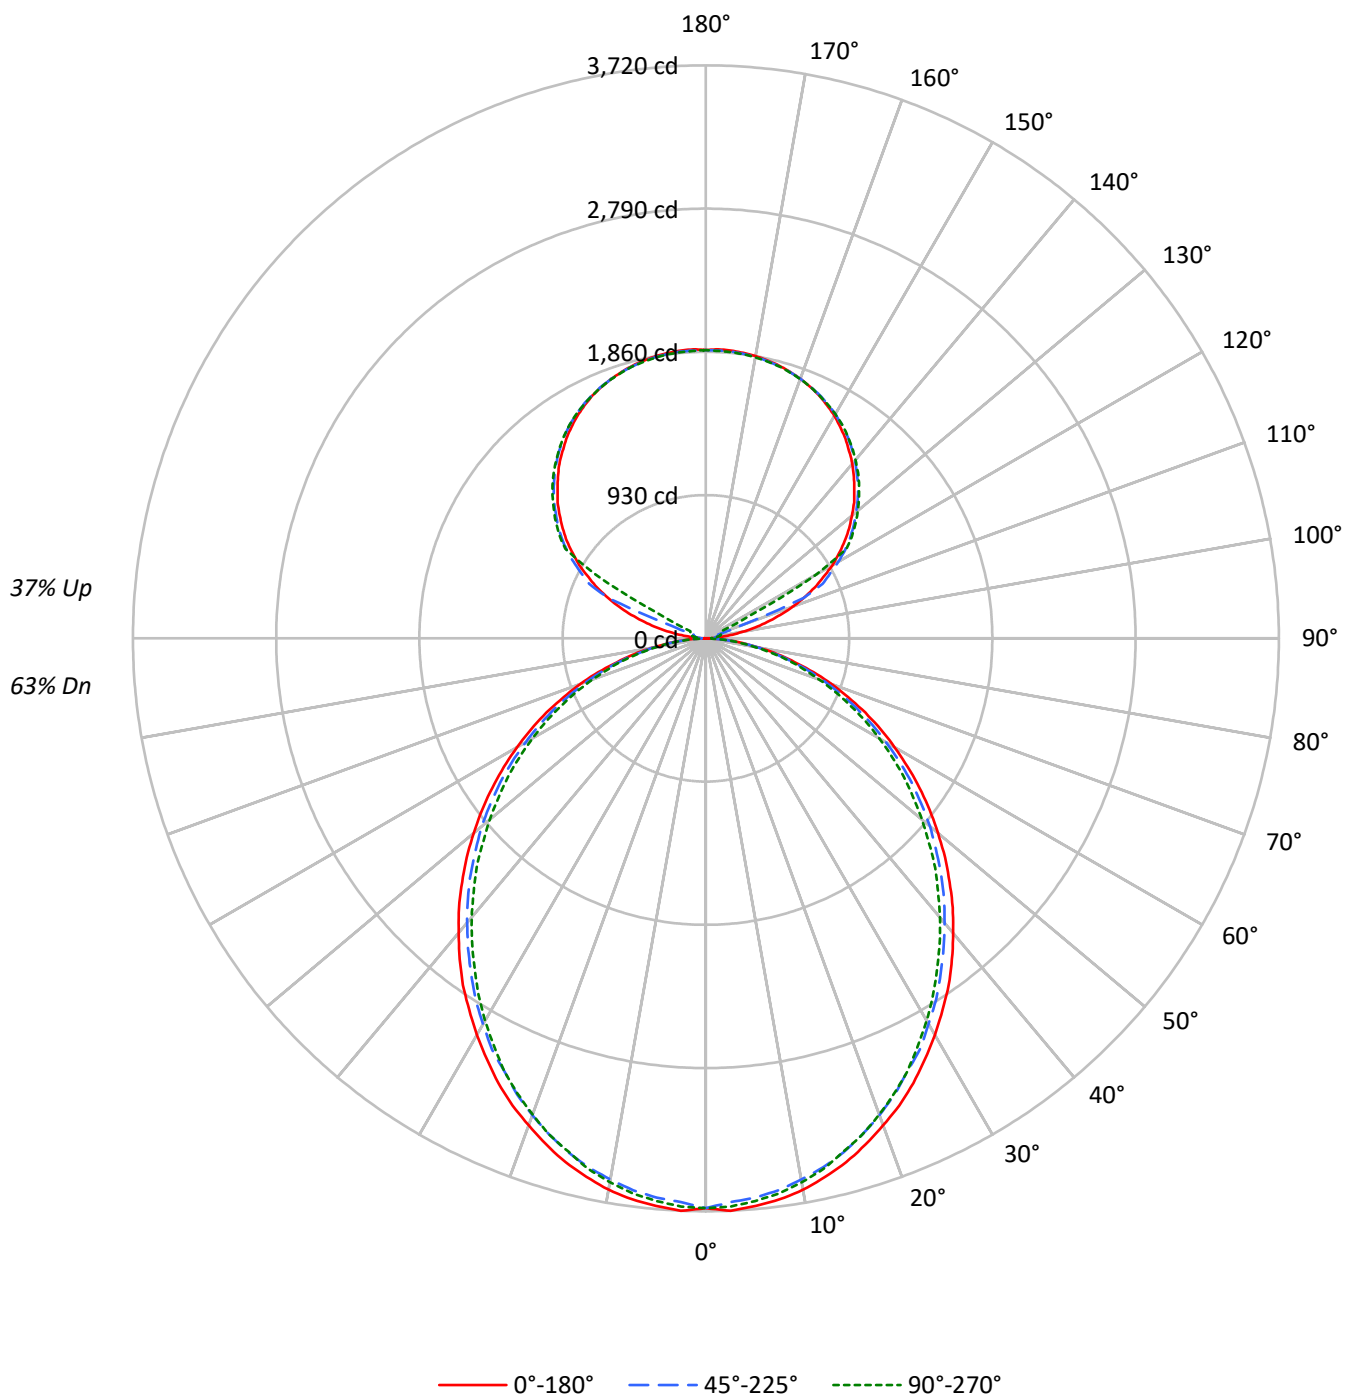

TEST NUMBER: P914825

CATALOG NUMBER: DFN2DIP-SQ3F0-120D070US927-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68
1	101	96	92	89	94	91	87	84	80	77	75	70	68	66	60	59	58
2	92	84	78	73	86	79	74	69	70	66	62	61	58	55	53	51	49
3	84	74	67	61	78	70	63	58	62	56	52	54	50	47	47	44	41
4	77	66	57	51	72	62	55	49	55	49	44	48	44	40	42	39	36
5	70	59	50	44	66	55	48	42	49	43	38	43	39	35	38	34	31
6	65	53	44	38	61	50	42	37	44	38	34	39	34	30	34	31	27
7	60	48	39	34	56	45	38	32	40	34	30	36	31	27	31	27	24
8	56	43	35	30	52	41	34	29	37	31	26	33	28	24	29	25	22
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	27	23	20
10	49	36	29	24	46	35	28	23	31	25	21	28	23	20	25	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4238	4238	4238
5°	4242	4176	4206
10°	4205	4117	4148
15°	4141	4047	4057
20°	4054	3950	3965
25°	3969	3834	3858
30°	3862	3727	3723
35°	3760	3600	3580
40°	3635	3472	3444
45°	3511	3344	3304
50°	3375	3209	3143
55°	3232	3053	2994
60°	3070	2868	2824
65°	2893	2677	2623
70°	2668	2442	2406
75°	2358	2162	2204
80°	1981	1804	1822
85°	1395	1196	1192

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3511 cd/sqm

TEST NUMBER: P914825

CATALOG NUMBER: DFN2DIP-SQ3F0-120D070US927-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	348.1	2.3
10°-20°	979.5	6.6
20°-30°	1439.5	9.7
30°-40°	1671.9	11.2
40°-50°	1669.9	11.2
50°-60°	1456.0	9.8
60°-70°	1076.3	7.2
70°-80°	609.0	4.1
80°-90°	164.0	1.1
90°-100°	61.7	0.4
100°-110°	230.0	1.5
110°-120°	610.1	4.1
120°-130°	1011.9	6.8
130°-140°	1074.9	7.2
140°-150°	999.0	6.7
150°-160°	803.2	5.4
160°-170°	517.5	3.5
170°-180°	178.1	1.2
0°-30°	2767.2	18.6
0°-40°	4439.1	29.8
0°-60°	7565.0	50.8
0°-90°	9414.4	63.2
90°-120°	901.9	6.1
90°-150°	3987.7	26.8
90°-180°	5487.0	36.8
0°-180°	14900.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3699	3699	3699	3699	3699	
5°	3699	3685	3646	3674	3667	351
15°	3521	3500	3454	3468	3450	992
25°	3187	3158	3098	3105	3098	1466
35°	2749	2714	2657	2636	2618	1717
45°	2237	2212	2159	2120	2106	1727
55°	1693	1672	1629	1586	1569	1514
65°	1142	1120	1085	1053	1035	1129
75°	597	591	572	551	558	638
85°	146	142	139	128	124	162
90°	1	16	27	34	36	14
95°	88	43	53	60	58	104
105°	412	452	83	97	103	440
115°	779	802	836	209	111	767
125°	1101	1119	1144	1154	1158	982
135°	1362	1384	1396	1410	1407	1052
145°	1580	1579	1602	1612	1605	988
155°	1740	1728	1744	1752	1742	802
165°	1834	1826	1830	1839	1830	518
175°	1876	1866	1869	1878	1865	178
180°	1871	1871	1871	1871	1871	

TEST NUMBER: P914825

CATALOG NUMBER: DFN2DIP-SQ3F0-120D070US927-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3698.9	3698.9	3698.9	3698.9	3698.9
2.5°	3720.4	3702.7	3663.4	3698.9	3692.1
5°	3698.9	3684.9	3645.7	3674.0	3667.2
7.5°	3674.0	3652.8	3613.6	3642.3	3635.2
10°	3635.2	3610.2	3567.6	3595.9	3585.3
12.5°	3581.5	3560.4	3517.8	3535.5	3528.3
15°	3521.2	3500.0	3453.6	3467.9	3450.2
17.5°	3446.5	3425.3	3378.9	3396.6	3378.9
20°	3364.6	3343.4	3293.7	3304.2	3290.2
22.5°	3283.0	3251.0	3204.5	3204.5	3197.4
25°	3186.8	3158.5	3098.1	3105.0	3098.1
27.5°	3080.0	3055.1	3009.1	2998.5	2980.8
30°	2973.6	2944.9	2891.7	2881.2	2866.8
32.5°	2859.6	2838.5	2781.5	2760.0	2745.7
35°	2749.4	2714.0	2657.0	2635.5	2617.8
37.5°	2624.9	2592.9	2535.9	2511.0	2493.2
40°	2497.0	2468.4	2411.3	2379.6	2365.3
42.5°	2372.5	2343.8	2287.2	2251.4	2230.2
45°	2237.4	2212.5	2158.9	2120.0	2105.7
47.5°	2105.7	2080.7	2023.8	1984.6	1963.4
50°	1966.8	1949.1	1899.3	1849.4	1831.7
52.5°	1831.7	1806.8	1760.8	1721.5	1696.6
55°	1693.2	1671.7	1629.0	1586.4	1568.7
57.5°	1554.3	1536.6	1490.2	1447.6	1433.2
60°	1415.5	1401.5	1351.7	1312.5	1301.9
62.5°	1280.4	1255.4	1220.0	1184.5	1170.2
65°	1141.9	1120.4	1084.9	1052.8	1035.1
67.5°	999.7	981.5	949.8	925.0	910.6
70°	867.9	853.6	821.5	796.6	782.7
72.5°	732.8	718.5	700.8	675.9	665.3
75°	597.4	590.6	572.4	551.4	558.5
77.5°	476.6	462.2	455.1	444.5	434.0
80°	355.8	352.0	344.9	334.4	327.2
82.5°	241.9	241.9	238.5	224.2	224.2
85°	145.7	142.3	138.9	127.9	124.5
87.5°	64.2	57.0	49.8	39.2	35.5
90°	1.3	16.2	27.0	33.9	36.5
92.5°	33.9	28.4	32.5	35.3	36.5
95°	87.9	43.3	52.8	59.7	58.2
97.5°	158.4	47.5	69.0	73.2	74.5
100°	239.8	54.2	77.2	87.9	90.7
102.5°	329.0	326.5	79.9	94.7	98.9
105°	411.7	452.3	82.6	97.4	102.9
107.5°	507.8	541.6	85.4	100.2	105.7
110°	600.0	628.3	237.0	101.6	106.9

TEST NUMBER: P914825

CATALOG NUMBER: DFN2DIP-SQ3F0-120D070US927-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	686.7	710.9	687.9	104.2	108.4
115°	778.6	801.6	835.5	208.6	111.1
117.5°	858.6	885.6	908.7	714.9	360.2
120°	947.9	968.2	992.7	1008.9	826.1
122.5°	1023.7	1045.4	1072.6	1080.6	1082.0
125°	1100.9	1118.6	1144.3	1153.8	1157.8
127.5°	1171.3	1190.3	1210.7	1224.2	1225.5
130°	1237.7	1259.4	1274.2	1289.2	1287.9
132.5°	1305.4	1323.1	1337.9	1350.1	1348.8
135°	1362.3	1384.0	1396.1	1409.8	1407.1
137.5°	1421.8	1438.1	1451.8	1465.3	1461.3
140°	1480.0	1491.0	1505.8	1518.0	1511.2
142.5°	1528.9	1538.4	1555.9	1566.7	1560.0
145°	1580.4	1579.0	1601.9	1611.5	1604.7
147.5°	1624.9	1621.0	1643.9	1650.7	1645.4
150°	1668.3	1658.9	1680.6	1688.6	1681.9
152.5°	1704.9	1694.1	1714.4	1722.5	1713.1
155°	1740.1	1728.0	1744.2	1752.3	1741.5
157.5°	1768.5	1757.8	1770.0	1779.5	1768.5
160°	1793.0	1784.8	1793.0	1801.0	1791.5
162.5°	1814.6	1806.5	1813.2	1822.7	1810.5
165°	1833.5	1825.5	1829.5	1839.0	1829.5
167.5°	1848.5	1840.2	1844.4	1853.9	1841.7
170°	1860.7	1852.5	1855.2	1864.7	1852.5
172.5°	1868.8	1860.7	1863.4	1872.9	1860.7
175°	1875.5	1866.0	1868.8	1878.2	1864.7
177.5°	1878.2	1868.8	1870.2	1879.7	1867.4
180°	1871.4	1871.4	1871.4	1871.4	1871.4

TEST NUMBER: P914825

CATALOG NUMBER: DFN2DIP-SQ3F0-120D070US927-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.39	14.38	14.22	15.24	16.31	12.95	13.94	13.78	14.80	15.87
	3H	15.06	15.95	15.90	16.81	17.91	14.57	15.46	15.41	16.32	17.42
	4H	15.65	16.49	16.51	17.36	18.47	15.15	16.00	16.02	16.87	17.98
	6H	16.05	16.83	16.93	17.71	18.83	15.55	16.33	16.43	17.21	18.33
	8H	16.16	16.90	17.04	17.80	18.92	15.65	16.40	16.54	17.29	18.41
	12H	16.21	16.91	17.10	17.81	18.95	15.70	16.40	16.59	17.30	18.44
4H	2H	13.86	14.71	14.73	15.58	16.69	13.51	14.35	14.38	15.22	16.33
	3H	15.74	16.44	16.62	17.34	18.47	15.33	16.03	16.21	16.94	18.06
	4H	16.45	17.09	17.34	18.00	19.14	16.03	16.67	16.92	17.57	18.72
	6H	16.97	17.52	17.88	18.45	19.60	16.54	17.09	17.44	18.02	19.17
	8H	17.12	17.64	18.03	18.56	19.72	16.68	17.20	17.59	18.12	19.29
	12H	17.20	17.66	18.13	18.60	19.77	16.75	17.22	17.68	18.15	19.32
8H	4H	16.65	17.17	17.56	18.09	19.26	16.28	16.80	17.19	17.72	18.88
	6H	17.28	17.71	18.22	18.68	19.84	16.90	17.33	17.84	18.29	19.46
	8H	17.50	17.88	18.45	18.84	20.02	17.11	17.49	18.06	18.44	19.63
	12H	17.64	17.97	18.59	18.92	20.15	17.23	17.56	18.18	18.51	19.74
12H	4H	16.65	17.11	17.57	18.05	19.22	16.28	16.74	17.21	17.68	18.85
	6H	17.31	17.69	18.26	18.65	19.83	16.94	17.32	17.89	18.28	19.46
	8H	17.56	17.89	18.51	18.84	20.07	17.18	17.51	18.13	18.46	19.69