

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914834

Luminaire Tested: DFN2DIP-SQ3F0-120D090US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914834
REPORT IS A COMBINATION OF REPORTS P899968 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-120D090US927-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14390.0 lumens
Efficiency: N/A
Efficacy: 74.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 194.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9957
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914834

CATALOG NUMBER: DFN2DIP-SQ3F0-120D090US927-RLFL

Luminous Intensity Polar Plot

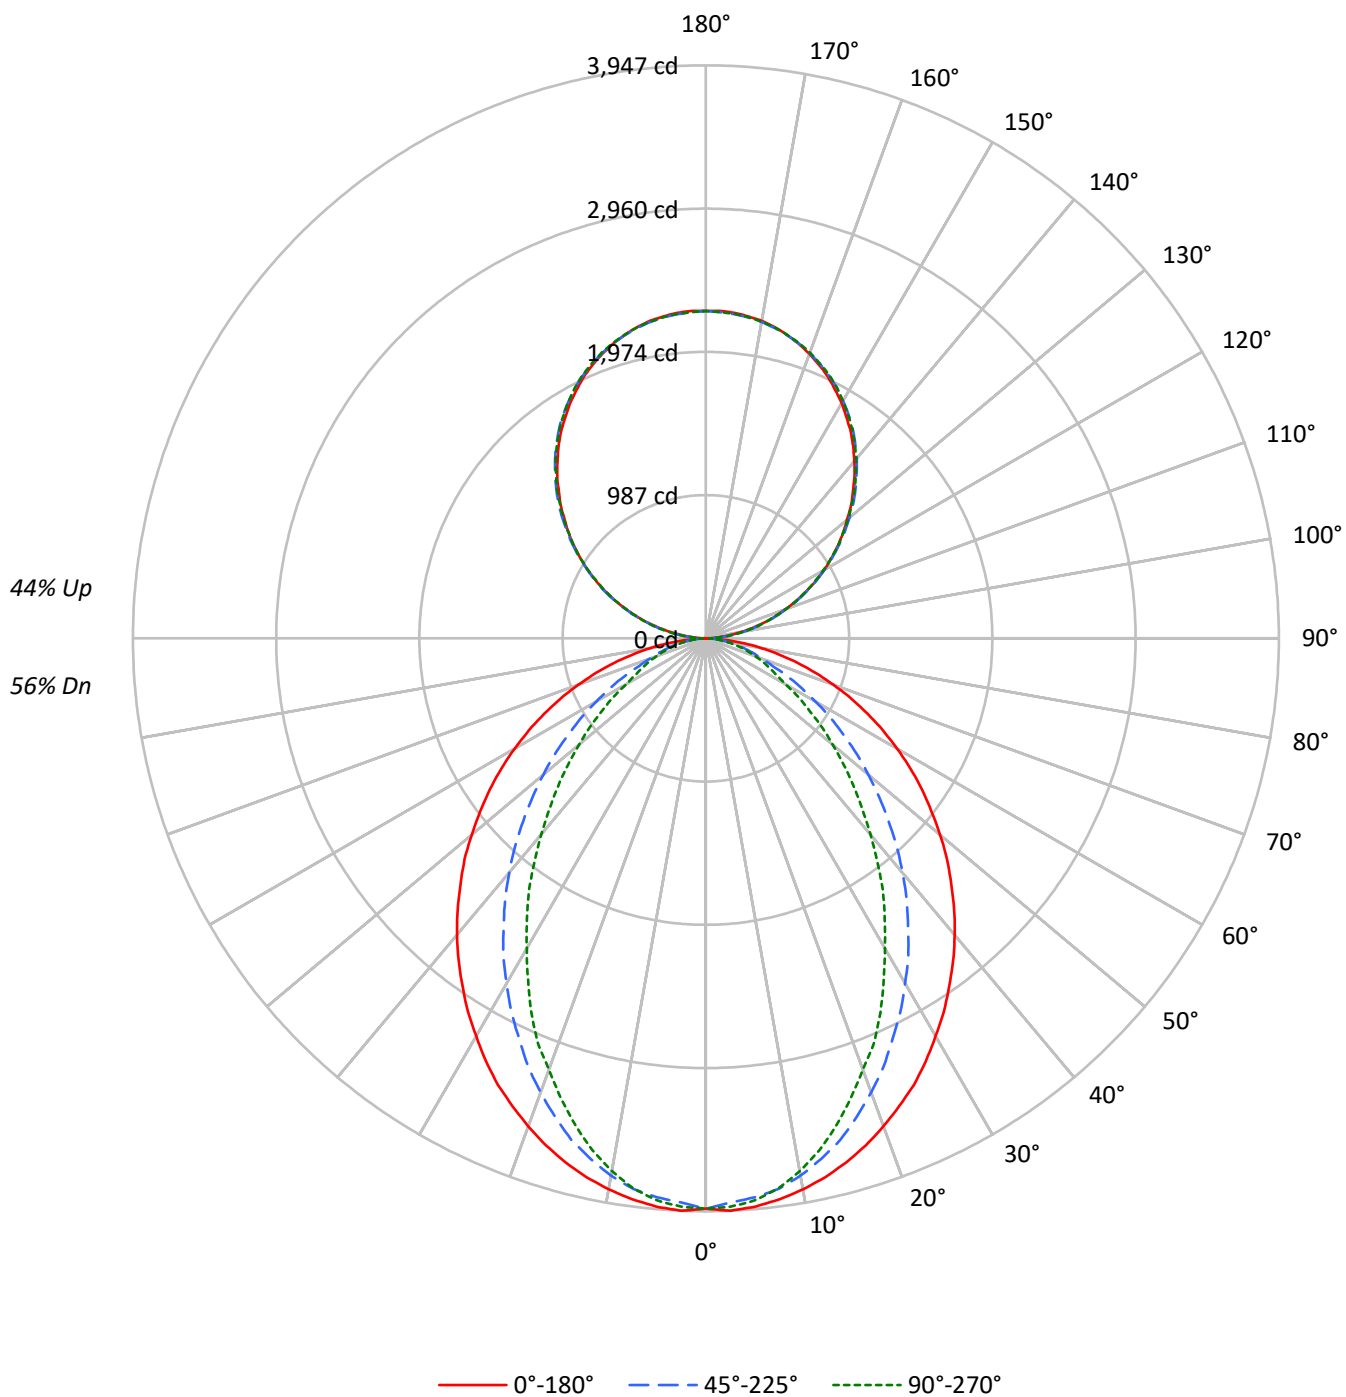

TEST NUMBER: P914834

CATALOG NUMBER: DFN2DIP-SQ3F0-120D090US927-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	109	109	109	109		101	101	101	101		87	87	87		74	74	74		62	62	62
1	100	96	92	88		93	89	86	83		77	75	72		66	64	63		55	54	53
2	91	84	78	73		85	79	73	69		68	64	61		58	56	53		49	47	46
3	84	74	67	62		78	70	63	58		61	56	52		52	49	46		44	42	40
4	77	66	59	53		71	62	55	50		54	49	45		47	43	40		40	37	35
5	71	59	51	46		66	56	49	43		49	43	39		42	38	35		36	33	30
6	65	53	46	40		61	50	43	38		44	38	34		38	34	31		33	30	27
7	61	48	41	35		56	46	39	34		40	35	30		35	31	27		30	27	24
8	56	44	37	31		52	42	35	30		37	31	27		32	28	25		28	25	22
9	53	41	33	28		49	38	32	27		34	28	25		30	25	22		26	23	20
10	49	37	30	25		46	35	29	24		31	26	22		28	23	20		24	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4502	4502	4502
5°	4506	4427	4457
10°	4459	4337	4311
15°	4394	4191	4085
20°	4310	3991	3809
25°	4224	3767	3542
30°	4110	3537	3204
35°	3997	3291	2907
40°	3882	3036	2568
45°	3749	2754	2260
50°	3612	2469	1959
55°	3468	2166	1670
60°	3301	1848	1373
65°	3109	1526	1234
70°	2875	1226	1115
75°	2581	1074	1011
80°	2158	892	871
85°	1463	581	646

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3749 cd/sqm

TEST NUMBER: P914834

CATALOG NUMBER: DFN2DIP-SQ3F0-120D090US927-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	368.2	2.6
10°-20°	1010.8	7.0
20°-30°	1419.2	9.9
30°-40°	1547.0	10.8
40°-50°	1421.9	9.9
50°-60°	1116.7	7.8
60°-70°	726.9	5.1
70°-80°	374.2	2.6
80°-90°	101.9	0.7
90°-100°	139.5	1.0
100°-110°	443.3	3.1
110°-120°	758.7	5.3
120°-130°	997.8	6.9
130°-140°	1120.0	7.8
140°-150°	1098.2	7.6
150°-160°	921.3	6.4
160°-170°	611.0	4.2
170°-180°	213.5	1.5
0°-30°	2798.2	19.4
0°-40°	4345.2	30.2
0°-60°	6883.7	47.8
0°-90°	8086.7	56.2
90°-120°	1341.5	9.3
90°-150°	4557.5	31.7
90°-180°	6303.0	43.8
0°-180°	14390.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3929	3929	3929	3929	3929	
5°	3929	3911	3865	3897	3886	373
15°	3737	3698	3577	3509	3474	1053
25°	3392	3278	3044	2898	2844	1560
35°	2923	2741	2429	2205	2126	1829
45°	2389	2151	1778	1525	1440	1845
55°	1817	1540	1156	942	875	1623
65°	1227	939	619	498	487	1216
75°	654	405	284	260	256	692
85°	153	78	68	68	68	175
90°	2	24	67	62	65	14
95°	99	118	122	122	118	110
105°	409	415	419	422	422	432
115°	761	772	769	767	761	753
125°	1107	1124	1119	1113	1111	990
135°	1432	1453	1458	1455	1450	1107
145°	1739	1752	1763	1765	1758	1086
155°	1988	1994	2000	2009	2003	915
165°	2163	2161	2161	2175	2165	610
175°	2251	2245	2241	2255	2243	214
180°	2255	2255	2255	2255	2255	

TEST NUMBER: P914834

CATALOG NUMBER: DFN2DIP-SQ3F0-120D090US927-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3928.9	3928.9	3928.9	3928.9	3928.9
2.5°	3946.6	3928.9	3889.7	3925.5	3918.3
5°	3928.9	3911.2	3864.7	3896.8	3886.3
7.5°	3896.8	3875.7	3825.9	3839.9	3822.1
10°	3854.2	3829.3	3758.3	3747.4	3726.3
12.5°	3801.0	3769.0	3672.7	3651.6	3612.4
15°	3736.9	3697.7	3576.9	3509.4	3474.0
17.5°	3662.2	3605.2	3455.8	3377.8	3320.8
20°	3576.9	3505.6	3328.0	3239.3	3160.8
22.5°	3484.5	3402.7	3196.3	3075.6	3022.4
25°	3392.1	3278.1	3043.5	2897.9	2844.3
27.5°	3281.9	3160.8	2901.3	2734.2	2652.3
30°	3164.6	3029.2	2744.7	2563.7	2467.5
32.5°	3050.7	2886.9	2595.7	2382.2	2293.2
35°	2922.8	2741.3	2428.6	2204.6	2126.1
37.5°	2798.3	2602.6	2272.1	2026.5	1937.8
40°	2666.6	2453.5	2108.4	1856.0	1763.6
42.5°	2531.6	2304.1	1945.0	1681.7	1593.1
45°	2389.4	2151.0	1777.9	1525.2	1439.9
47.5°	2254.3	2002.0	1618.0	1365.2	1287.1
50°	2105.0	1852.6	1461.4	1215.8	1141.5
52.5°	1959.0	1692.3	1312.0	1077.4	1009.9
55°	1816.8	1539.5	1155.5	942.3	874.8
57.5°	1671.1	1386.7	1017.0	817.8	760.9
60°	1521.8	1237.3	871.0	690.0	633.0
62.5°	1376.2	1091.7	746.6	576.1	547.7
65°	1226.8	938.6	618.7	498.0	487.0
67.5°	1084.6	796.3	498.0	437.2	426.7
70°	935.2	657.9	412.3	376.8	362.5
72.5°	793.0	529.7	344.8	316.5	309.3
75°	654.1	405.1	284.5	259.5	256.1
77.5°	515.7	287.8	224.1	209.8	202.6
80°	387.5	206.4	170.5	156.5	156.5
82.5°	270.1	138.8	117.3	110.1	110.1
85°	152.8	78.1	67.5	67.5	67.5
87.5°	57.0	28.3	28.3	24.9	24.9
90°	2.1	24.5	66.6	62.5	64.6
92.5°	42.1	57.1	59.2	61.2	61.2
95°	99.3	118.3	121.7	121.7	118.3
97.5°	165.2	182.8	190.4	190.4	190.4
100°	241.3	257.0	262.4	262.4	260.4
102.5°	321.5	333.1	340.6	342.6	340.6
105°	409.2	414.6	418.7	422.2	422.2
107.5°	496.2	504.4	504.4	505.7	496.2
110°	580.5	591.4	591.4	591.4	586.0

TEST NUMBER: P914834

CATALOG NUMBER: DFN2DIP-SQ3F0-120D090US927-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	671.6	683.2	681.1	675.7	671.6
115°	761.4	772.2	768.8	766.8	761.4
117.5°	850.4	865.4	855.9	850.4	844.9
120°	940.2	955.1	940.2	940.2	934.0
122.5°	1021.7	1040.8	1031.3	1025.8	1021.7
125°	1107.4	1124.3	1119.0	1112.8	1110.8
127.5°	1191.0	1212.0	1204.6	1196.4	1191.0
130°	1269.2	1293.6	1290.2	1286.1	1278.7
132.5°	1356.8	1375.9	1377.2	1367.7	1362.3
135°	1432.3	1453.3	1457.5	1455.4	1450.0
137.5°	1516.6	1533.6	1537.0	1535.6	1527.5
140°	1590.7	1607.7	1617.2	1617.2	1609.7
142.5°	1666.8	1683.8	1689.2	1691.3	1683.8
145°	1738.9	1752.5	1763.3	1765.4	1757.9
147.5°	1803.5	1820.4	1828.6	1832.0	1824.6
150°	1870.1	1881.7	1889.1	1895.2	1889.1
152.5°	1929.2	1940.8	1950.3	1957.8	1950.3
155°	1988.4	1993.8	1999.9	2009.4	2003.3
157.5°	2039.3	2043.4	2046.8	2060.4	2050.9
160°	2084.9	2089.0	2091.0	2102.5	2094.4
162.5°	2127.0	2127.0	2129.1	2142.0	2132.5
165°	2163.1	2161.0	2161.0	2174.6	2165.1
167.5°	2195.7	2189.6	2189.6	2203.1	2193.6
170°	2220.2	2214.7	2212.7	2226.3	2214.7
172.5°	2237.1	2231.7	2229.7	2243.3	2231.7
175°	2250.7	2245.3	2241.2	2254.9	2243.3
177.5°	2258.2	2252.8	2248.7	2260.3	2248.7
180°	2254.9	2254.9	2254.9	2254.9	2254.9

TEST NUMBER: P914834

CATALOG NUMBER: DFN2DIP-SQ3F0-120D090US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.90	13.78	13.81	14.71	15.89	8.86	9.74	9.77	10.67	11.85
	3H	14.58	15.37	15.50	16.30	17.51	10.05	10.84	10.97	11.77	12.98
	4H	15.18	15.93	16.12	16.87	18.08	10.49	11.24	11.43	12.18	13.39
	6H	15.60	16.29	16.55	17.24	18.46	10.81	11.50	11.76	12.44	13.67
	8H	15.73	16.38	16.69	17.34	18.57	10.90	11.55	11.86	12.51	13.74
	12H	15.79	16.41	16.75	17.37	18.62	10.94	11.56	11.90	12.52	13.77
4H	2H	12.92	13.67	13.86	14.61	15.82	9.46	10.21	10.40	11.14	12.36
	3H	14.75	15.37	15.70	16.34	17.57	10.81	11.43	11.76	12.39	13.63
	4H	15.44	16.01	16.40	16.97	18.22	11.35	11.92	12.31	12.88	14.13
	6H	15.95	16.44	16.93	17.43	18.68	11.77	12.25	12.74	13.24	14.49
	8H	16.13	16.58	17.10	17.56	18.83	11.89	12.35	12.87	13.33	14.59
	12H	16.22	16.63	17.22	17.63	18.90	11.96	12.37	12.95	13.36	14.64
8H	4H	15.41	15.87	16.39	16.84	18.11	11.63	12.09	12.61	13.07	14.34
	6H	15.97	16.35	16.97	17.37	18.64	12.14	12.52	13.14	13.54	14.81
	8H	16.19	16.52	17.20	17.53	18.81	12.33	12.66	13.34	13.67	14.96
	12H	16.32	16.62	17.34	17.62	18.95	12.45	12.74	13.46	13.74	15.07
12H	4H	15.37	15.77	16.36	16.77	18.04	11.64	12.05	12.63	13.04	14.32
	6H	15.95	16.28	16.96	17.29	18.58	12.19	12.52	13.20	13.53	14.82
	8H	16.17	16.46	17.18	17.46	18.79	12.40	12.69	13.41	13.69	15.03