

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917255

Luminaire Tested: DFN2DIP-SQ3F0-040D040US930-RLLONL

Issue Date: 11/21/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P917255  
REPORT IS A COMBINATION OF REPORTS P901382 AND P898289  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ3F0-040D040US930-RLLONL  
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6000.6 lumens  
Efficiency: N/A  
Efficacy: 95.9 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')  
CIE Type: General Diffuse

Input Watts (W): 62.6  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9933  
Total Harmonic Distortion (THDi): 0.066  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P917255  
CATALOG NUMBER: DFN2DIP-SQ3F0-040D040US930-RLLONL

### Luminous Intensity Polar Plot

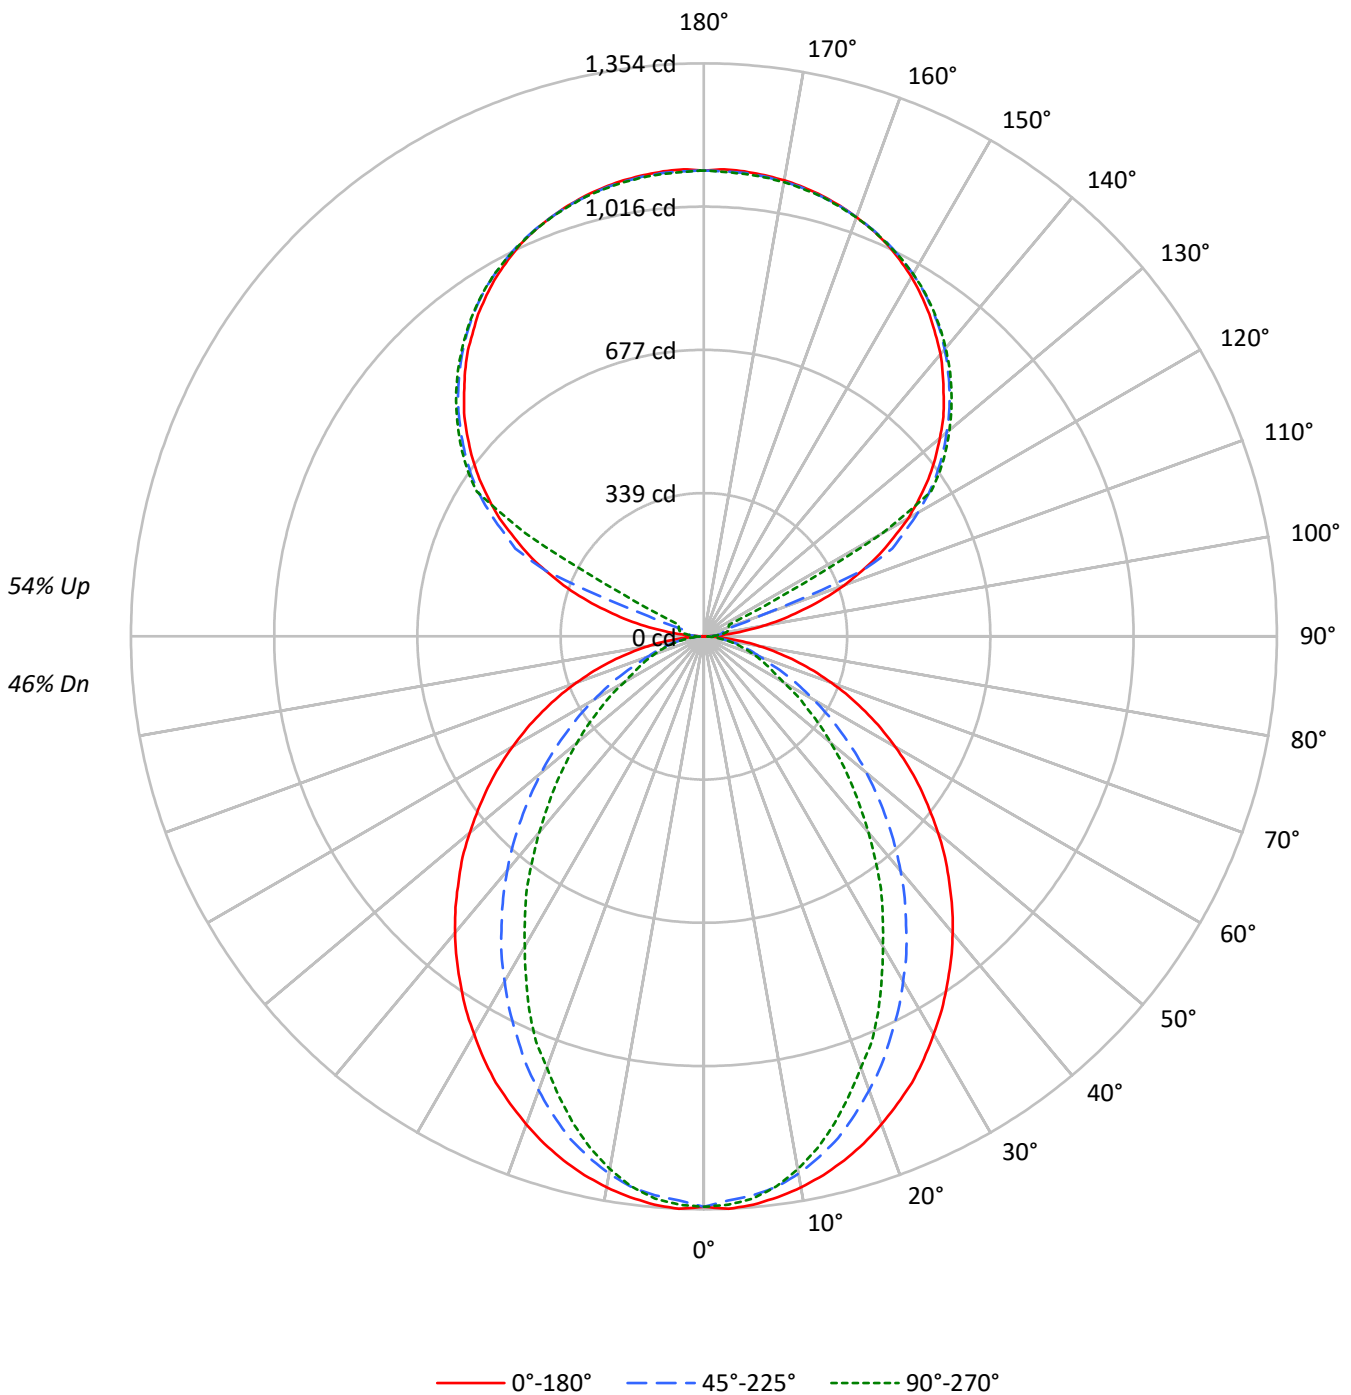



TEST NUMBER: P917255  
 CATALOG NUMBER: DFN2DIP-SQ3F0-040D040US930-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53	46			46
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45	40			40
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39	34			34
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34	29			29
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29	26			26
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26	23			23
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23	20			20
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21	18			18
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19	16			16
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17	15			15
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15	13			13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1544	1544	1544
5°	1546	1519	1529
10°	1530	1488	1479
15°	1508	1438	1401
20°	1479	1369	1307
25°	1449	1292	1215
30°	1410	1213	1099
35°	1371	1129	997
40°	1332	1042	881
45°	1286	945	775
50°	1239	847	672
55°	1190	743	573
60°	1132	634	471
65°	1067	524	423
70°	986	421	382
75°	886	369	347
80°	740	306	299
85°	502	200	222

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1286 cd/sqm



TEST NUMBER: P917255

CATALOG NUMBER: DFN2DIP-SQ3F0-040D040US930-RLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	126.3	2.1
10°-20°	346.8	5.8
20°-30°	486.9	8.1
30°-40°	530.7	8.8
40°-50°	487.8	8.1
50°-60°	383.1	6.4
60°-70°	249.3	4.2
70°-80°	128.4	2.1
80°-90°	34.7	0.6
90°-100°	36.3	0.6
100°-110°	135.3	2.3
110°-120°	358.8	6.0
120°-130°	595.1	9.9
130°-140°	632.1	10.5
140°-150°	587.5	9.8
150°-160°	472.3	7.9
160°-170°	304.4	5.1
170°-180°	104.8	1.7
0°-30°	960.0	16.0
0°-40°	1490.7	24.8
0°-60°	2361.5	39.4
0°-90°	2774.0	46.2
90°-120°	530.4	8.8
90°-150°	2345.2	39.1
90°-180°	3227.0	53.8
0°-180°	6000.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1348	1348	1348	1348	1348	
5°	1348	1342	1326	1337	1333	128
15°	1282	1268	1227	1204	1192	361
25°	1164	1125	1044	994	976	535
35°	1003	940	833	756	729	628
45°	820	738	610	523	494	633
55°	623	528	396	323	300	557
65°	421	322	212	171	167	417
75°	224	139	98	89	88	237
85°	52	27	23	23	23	60
90°	1	10	16	20	21	6
95°	52	25	31	35	34	61
105°	242	266	49	57	60	259
115°	458	471	491	123	65	451
125°	647	658	673	679	681	577
135°	801	814	821	829	828	619
145°	929	929	942	948	944	581
155°	1023	1016	1026	1030	1024	472
165°	1078	1074	1076	1082	1076	305
175°	1103	1097	1099	1105	1097	105
180°	1101	1101	1101	1101	1101	



TEST NUMBER: P917255

CATALOG NUMBER: DFN2DIP-SQ3F0-040D040US930-RLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1347.9	1347.9	1347.9	1347.9	1347.9
2.5°	1354.0	1347.9	1334.4	1346.7	1344.2
5°	1347.9	1341.7	1325.8	1336.8	1333.3
7.5°	1336.8	1329.6	1312.5	1317.3	1311.2
10°	1322.3	1313.7	1289.3	1285.6	1278.4
12.5°	1304.0	1293.0	1260.0	1252.7	1239.3
15°	1282.0	1268.5	1227.1	1204.0	1191.8
17.5°	1256.4	1236.8	1185.5	1158.8	1139.2
20°	1227.1	1202.6	1141.7	1111.3	1084.3
22.5°	1195.4	1167.3	1096.5	1055.1	1036.9
25°	1163.7	1124.6	1044.1	994.2	975.7
27.5°	1125.9	1084.3	995.3	938.0	909.9
30°	1085.7	1039.2	941.6	879.5	846.5
32.5°	1046.6	990.4	890.5	817.3	786.7
35°	1002.7	940.4	833.2	756.3	729.4
37.5°	960.0	892.8	779.4	695.2	664.8
40°	914.8	841.7	723.3	636.7	605.0
42.5°	868.5	790.4	667.2	576.9	546.5
45°	819.7	737.9	609.9	523.3	494.0
47.5°	773.4	686.8	555.1	468.4	441.6
50°	722.1	635.5	501.3	417.1	391.6
52.5°	672.1	580.6	450.1	369.6	346.4
55°	623.3	528.2	396.4	323.3	300.1
57.5°	573.3	475.7	348.9	280.5	261.1
60°	522.0	424.4	298.8	236.7	217.2
62.5°	472.1	374.5	256.1	197.6	187.9
65°	420.9	322.0	212.2	170.8	167.1
67.5°	372.1	273.2	170.8	150.0	146.3
70°	320.8	225.7	141.5	129.3	124.3
72.5°	272.1	181.7	118.3	108.6	106.2
75°	224.4	139.0	97.6	89.0	87.9
77.5°	176.9	98.7	76.9	72.0	69.5
80°	132.9	70.8	58.5	53.7	53.7
82.5°	92.7	47.6	40.3	37.7	37.7
85°	52.4	26.8	23.2	23.2	23.2
87.5°	19.6	9.7	9.7	8.6	8.6
90°	0.7	9.5	15.9	20.0	21.4
92.5°	20.0	16.7	19.1	20.7	21.4
95°	51.7	25.4	31.0	35.1	34.2
97.5°	93.2	27.9	40.6	43.0	43.8
100°	141.0	31.9	45.4	51.7	53.3
102.5°	193.5	192.0	47.0	55.7	58.1
105°	242.1	266.0	48.6	57.3	60.5
107.5°	298.6	318.5	50.2	58.9	62.1
110°	352.9	369.5	139.4	59.8	62.9



TEST NUMBER: P917255

CATALOG NUMBER: DFN2DIP-SQ3F0-040D040US930-RLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	403.8	418.1	404.6	61.3	63.8
115°	457.9	471.4	491.4	122.6	65.4
117.5°	504.9	520.8	534.4	420.4	211.8
120°	557.5	569.4	583.8	593.4	485.8
122.5°	602.0	614.8	630.8	635.5	636.3
125°	647.4	657.9	672.9	678.6	680.9
127.5°	688.8	700.0	712.0	720.0	720.7
130°	727.9	740.7	749.3	758.1	757.4
132.5°	767.7	778.1	786.8	794.0	793.3
135°	801.2	814.0	821.1	829.1	827.5
137.5°	836.2	845.7	853.8	861.7	859.3
140°	870.4	876.9	885.6	892.8	888.8
142.5°	899.2	904.7	915.1	921.4	917.5
145°	929.4	928.6	942.1	947.7	943.7
147.5°	955.6	953.2	966.8	970.8	967.7
150°	981.1	975.6	988.4	993.1	989.1
152.5°	1002.7	996.3	1008.2	1013.0	1007.5
155°	1023.4	1016.3	1025.8	1030.5	1024.2
157.5°	1040.1	1033.7	1041.0	1046.5	1040.1
160°	1054.4	1049.6	1054.4	1059.2	1053.6
162.5°	1067.1	1062.4	1066.4	1072.0	1064.8
165°	1078.3	1073.6	1075.9	1081.5	1075.9
167.5°	1087.1	1082.2	1084.8	1090.3	1083.1
170°	1094.3	1089.5	1091.0	1096.7	1089.5
172.5°	1099.0	1094.3	1095.9	1101.5	1094.3
175°	1102.9	1097.4	1099.0	1104.6	1096.7
177.5°	1104.6	1099.0	1099.8	1105.5	1098.3
180°	1100.7	1100.7	1100.7	1100.7	1100.7



TEST NUMBER: P917255  
 CATALOG NUMBER: DFN2DIP-SQ3F0-040D040US930-RLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.26	9.06	9.25	10.06	11.39	4.22	5.02	5.21	6.02	7.35
	3H	9.93	10.65	10.94	11.66	13.01	5.40	6.11	6.41	7.13	8.47
	4H	10.53	11.21	11.55	12.23	13.58	5.84	6.52	6.86	7.54	8.89
	6H	10.95	11.57	11.98	12.59	13.96	6.16	6.78	7.19	7.80	9.17
	8H	11.07	11.67	12.11	12.70	14.07	6.24	6.84	7.28	7.87	9.24
	12H	11.13	11.70	12.17	12.73	14.11	6.28	6.85	7.32	7.88	9.26
4H	2H	8.27	8.95	9.30	9.96	11.32	4.81	5.49	5.83	6.50	7.86
	3H	10.09	10.66	11.13	11.70	13.07	6.15	6.71	7.18	7.76	9.12
	4H	10.78	11.30	11.82	12.33	13.72	6.69	7.21	7.73	8.24	9.63
	6H	11.29	11.73	12.34	12.79	14.18	7.10	7.54	8.15	8.60	9.99
	8H	11.46	11.87	12.51	12.93	14.33	7.23	7.64	8.28	8.69	10.09
	12H	11.55	11.93	12.62	12.99	14.40	7.29	7.66	8.35	8.72	10.13
8H	4H	10.75	11.16	11.80	12.21	13.61	6.97	7.38	8.02	8.43	9.83
	6H	11.30	11.64	12.38	12.74	14.14	7.48	7.82	8.55	8.91	10.31
	8H	11.52	11.82	12.60	12.89	14.31	7.66	7.96	8.74	9.04	10.46
	12H	11.65	11.91	12.74	12.99	14.45	7.77	8.04	8.86	9.11	10.57
12H	4H	10.70	11.07	11.76	12.13	13.54	6.97	7.34	8.04	8.41	9.81
	6H	11.28	11.58	12.36	12.66	14.07	7.52	7.82	8.60	8.90	10.32
	8H	11.50	11.76	12.58	12.83	14.29	7.73	7.99	8.81	9.06	10.52