

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917343

Luminaire Tested: DFN2DIP-SQ3F0-060D080US930-RLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P917343  
REPORT IS A COMBINATION OF REPORTS P901458 AND P898289  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ3F0-060D080US930-RLLONL  
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 10615.2 lumens  
Efficiency: N/A  
Efficacy: 93.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 113.8  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9971  
Total Harmonic Distortion (THDi): 0.049  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P917343  
CATALOG NUMBER: DFN2DIP-SQ3F0-060D080US930-RLLONL

### Luminous Intensity Polar Plot

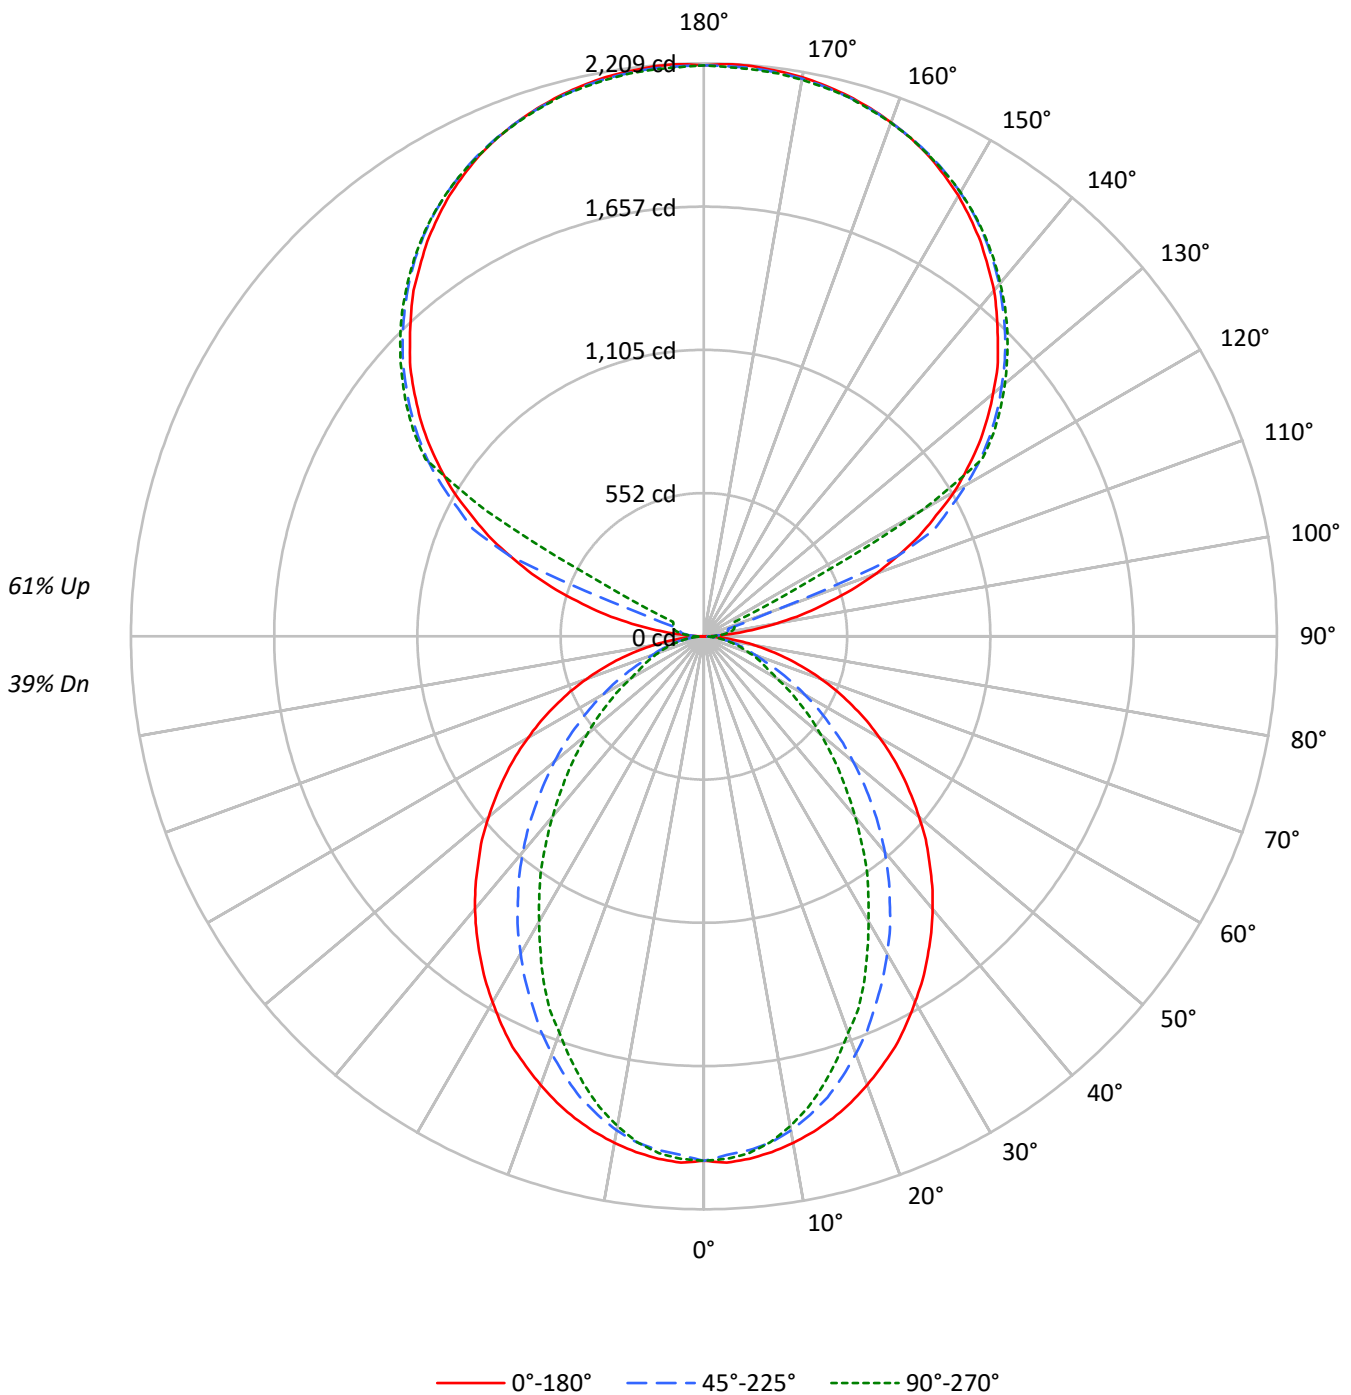



TEST NUMBER: P917343  
 CATALOG NUMBER: DFN2DIP-SQ3F0-060D080US930-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46	39			
1	96	92	88	85	87	83	80	78	68	66	64	54	53	52	41	41	40	34			
2	87	80	75	70	79	73	68	64	60	57	54	48	46	44	37	35	34	29			
3	80	71	64	58	73	65	59	54	53	49	46	43	40	37	33	31	29	25			
4	73	63	55	50	67	58	51	46	48	43	39	38	35	32	30	27	26	22			
5	67	56	48	43	61	52	45	40	43	38	34	35	31	28	27	25	23	19			
6	62	51	43	37	56	46	40	35	39	34	30	31	28	25	25	22	20	17			
7	57	46	38	33	52	42	35	31	35	30	26	29	25	22	23	20	18	15			
8	53	42	34	29	49	38	32	27	32	27	23	26	22	20	21	18	16	14			
9	50	38	31	26	45	35	29	24	29	24	21	24	20	18	19	17	15	12			
10	46	35	28	23	42	32	26	22	27	22	19	22	19	16	18	15	13	11			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2317	2317	2317
5°	2319	2278	2294
10°	2294	2232	2218
15°	2261	2157	2102
20°	2218	2054	1960
25°	2174	1938	1823
30°	2115	1820	1649
35°	2057	1693	1496
40°	1998	1562	1321
45°	1930	1417	1163
50°	1859	1271	1008
55°	1784	1114	859
60°	1699	951	706
65°	1600	786	635
70°	1479	631	573
75°	1328	553	520
80°	1110	459	449
85°	753	299	332

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1930 cd/sqm



TEST NUMBER: P917343

CATALOG NUMBER: DFN2DIP-SQ3F0-060D080US930-RLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	189.5	1.8
10°-20°	520.2	4.9
20°-30°	730.3	6.9
30°-40°	796.1	7.5
40°-50°	731.7	6.9
50°-60°	574.6	5.4
60°-70°	374.0	3.5
70°-80°	192.5	1.8
80°-90°	53.0	0.5
90°-100°	72.6	0.7
100°-110°	270.6	2.5
110°-120°	717.6	6.8
120°-130°	1190.2	11.2
130°-140°	1264.3	11.9
140°-150°	1175.0	11.1
150°-160°	944.7	8.9
160°-170°	608.7	5.7
170°-180°	209.5	2.0
0°-30°	1439.9	13.6
0°-40°	2236.0	21.1
0°-60°	3542.3	33.4
0°-90°	4161.9	39.2
90°-120°	1060.8	10.0
90°-150°	4690.4	44.2
90°-180°	6453.0	60.8
0°-180°	10615.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2022	2022	2022	2022	2022	
5°	2022	2013	1989	2005	2000	192
15°	1923	1903	1841	1806	1788	542
25°	1746	1687	1566	1491	1464	803
35°	1504	1411	1250	1134	1094	941
45°	1230	1107	915	785	741	950
55°	935	792	595	485	450	835
65°	631	483	318	256	251	626
75°	337	208	146	134	132	356
85°	79	40	35	35	35	90
90°	2	19	32	40	43	10
95°	104	51	62	70	68	123
105°	484	532	97	115	121	517
115°	916	943	983	245	131	902
125°	1295	1316	1346	1357	1362	1155
135°	1602	1628	1642	1658	1655	1238
145°	1859	1857	1884	1895	1887	1163
155°	2047	2032	2052	2061	2048	943
165°	2157	2147	2152	2163	2152	609
175°	2206	2195	2198	2209	2193	210
180°	2201	2201	2201	2201	2201	



TEST NUMBER: P917343

CATALOG NUMBER: DFN2DIP-SQ3F0-060D080US930-RLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2021.8	2021.8	2021.8	2021.8	2021.8
2.5°	2030.9	2021.8	2001.6	2020.0	2016.3
5°	2021.8	2012.6	1988.8	2005.3	1999.8
7.5°	2005.3	1994.4	1968.8	1976.0	1966.8
10°	1983.3	1970.5	1934.1	1928.4	1917.5
12.5°	1956.0	1939.4	1889.9	1879.1	1858.9
15°	1923.0	1902.7	1840.6	1805.9	1787.6
17.5°	1884.6	1855.2	1778.3	1738.1	1708.9
20°	1840.6	1803.9	1712.5	1666.9	1626.5
22.5°	1793.1	1750.9	1644.8	1582.7	1555.3
25°	1745.6	1686.9	1566.2	1491.3	1463.7
27.5°	1688.9	1626.5	1493.0	1407.0	1364.9
30°	1628.5	1558.8	1412.4	1319.2	1269.7
32.5°	1569.9	1485.6	1335.8	1225.9	1180.1
35°	1504.1	1410.7	1249.8	1134.4	1094.0
37.5°	1440.0	1339.2	1169.2	1042.8	997.2
40°	1372.2	1262.6	1084.9	955.0	907.5
42.5°	1302.8	1185.7	1000.9	865.4	819.8
45°	1229.6	1106.8	914.9	784.8	740.9
47.5°	1160.1	1030.2	832.6	702.5	662.3
50°	1083.2	953.3	752.0	625.7	587.4
52.5°	1008.0	870.8	675.1	554.4	519.7
55°	934.9	792.2	594.6	484.9	450.1
57.5°	860.0	713.5	523.3	420.9	391.5
60°	783.1	636.7	448.3	355.1	325.7
62.5°	708.2	561.8	384.2	296.4	281.8
65°	631.3	483.0	318.4	256.2	250.6
67.5°	558.1	409.8	256.2	225.0	219.6
70°	481.2	338.5	212.1	194.0	186.5
72.5°	408.1	272.6	177.4	162.9	159.1
75°	336.6	208.5	146.3	133.5	131.8
77.5°	265.4	148.1	115.3	107.9	104.3
80°	199.3	106.2	87.7	80.6	80.6
82.5°	139.0	71.4	60.3	56.7	56.7
85°	78.6	40.2	34.7	34.7	34.7
87.5°	29.4	14.6	14.6	12.8	12.8
90°	1.5	19.1	31.8	39.9	43.0
92.5°	39.9	33.5	38.2	41.4	43.0
95°	103.5	50.9	62.0	70.2	68.5
97.5°	186.3	55.8	81.1	86.1	87.6
100°	282.0	63.8	90.8	103.5	106.6
102.5°	387.0	383.9	94.0	111.4	116.3
105°	484.2	532.1	97.2	114.6	121.1
107.5°	597.3	637.0	100.4	117.8	124.3
110°	705.7	739.0	278.8	119.5	125.8



TEST NUMBER: P917343

CATALOG NUMBER: DFN2DIP-SQ3F0-060D080US930-RLLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	807.6	836.2	809.2	122.5	127.5
115°	915.8	942.9	982.8	245.3	130.7
117.5°	1009.8	1041.6	1068.9	840.9	423.7
120°	1115.0	1138.8	1167.6	1186.7	971.6
122.5°	1204.0	1229.6	1261.6	1271.0	1272.8
125°	1294.9	1315.6	1345.9	1357.1	1361.8
127.5°	1377.7	1400.0	1424.1	1439.9	1441.4
130°	1455.8	1481.3	1498.8	1516.4	1514.8
132.5°	1535.5	1556.2	1573.7	1588.0	1586.5
135°	1602.4	1627.9	1642.1	1658.2	1655.0
137.5°	1672.4	1691.5	1707.6	1723.5	1718.7
140°	1740.8	1753.7	1771.2	1785.5	1777.5
142.5°	1798.4	1809.5	1830.1	1842.8	1834.8
145°	1858.9	1857.2	1884.2	1895.4	1887.4
147.5°	1911.3	1906.6	1933.6	1941.6	1935.3
150°	1962.3	1951.2	1976.7	1986.1	1978.2
152.5°	2005.3	1992.6	2016.4	2026.1	2014.9
155°	2046.7	2032.5	2051.6	2061.1	2048.4
157.5°	2080.2	2067.5	2081.9	2093.0	2080.2
160°	2108.9	2099.3	2108.9	2118.4	2107.2
162.5°	2134.3	2124.8	2132.7	2143.9	2129.6
165°	2156.6	2147.2	2151.9	2163.0	2151.9
167.5°	2174.2	2164.5	2169.4	2180.6	2166.2
170°	2188.6	2178.9	2182.1	2193.3	2178.9
172.5°	2198.0	2188.6	2191.8	2202.9	2188.6
175°	2206.0	2194.8	2198.0	2209.1	2193.3
177.5°	2209.1	2198.0	2199.7	2210.8	2196.5
180°	2201.2	2201.2	2201.2	2201.2	2201.2



TEST NUMBER: P917343  
 CATALOG NUMBER: DFN2DIP-SQ3F0-060D080US930-RLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.93	9.68	9.98	10.73	12.15	4.89	5.64	5.95	6.69	8.11
	3H	10.60	11.27	11.66	12.33	13.77	6.07	6.74	7.13	7.80	9.24
	4H	11.20	11.84	12.27	12.90	14.34	6.51	7.15	7.58	8.21	9.65
	6H	11.62	12.20	12.70	13.26	14.72	6.82	7.41	7.90	8.47	9.93
	8H	11.74	12.29	12.82	13.37	14.83	6.91	7.46	7.99	8.55	10.00
	12H	11.79	12.32	12.88	13.40	14.87	6.95	7.47	8.04	8.55	10.02
4H	2H	8.94	9.57	10.02	10.64	12.08	5.48	6.11	6.56	7.17	8.62
	3H	10.76	11.28	11.84	12.37	13.83	6.81	7.34	7.90	8.43	9.89
	4H	11.44	11.92	12.53	13.00	14.48	7.35	7.84	8.44	8.92	10.40
	6H	11.95	12.36	13.05	13.46	14.94	7.76	8.17	8.86	9.28	10.75
	8H	12.12	12.51	13.22	13.60	15.09	7.88	8.27	8.98	9.37	10.85
	12H	12.21	12.56	13.32	13.66	15.16	7.94	8.29	9.06	9.40	10.89
8H	4H	11.40	11.79	12.50	12.88	14.37	7.62	8.01	8.72	9.10	10.59
	6H	11.96	12.28	13.08	13.42	14.90	8.13	8.45	9.25	9.59	11.07
	8H	12.17	12.45	13.30	13.57	15.08	8.32	8.60	9.44	9.71	11.22
	12H	12.30	12.55	13.43	13.66	15.21	8.43	8.67	9.56	9.79	11.33
12H	4H	11.35	11.70	12.46	12.81	14.30	7.62	7.97	8.74	9.08	10.57
	6H	11.93	12.21	13.06	13.33	14.84	8.18	8.46	9.30	9.58	11.08
	8H	12.15	12.39	13.28	13.51	15.05	8.38	8.62	9.51	9.74	11.28