

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917386

Luminaire Tested: DFN2DIP-SQ3F0-070D100US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917386
REPORT IS A COMBINATION OF REPORTS P899976 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-070D100US930-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12066.4 lumens
Efficiency: N/A
Efficacy: 84.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 143.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9963
Total Harmonic Distortion (THDi): 0.065
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917386

CATALOG NUMBER: DFN2DIP-SQ3F0-070D100US930-RLLFLL

Luminous Intensity Polar Plot

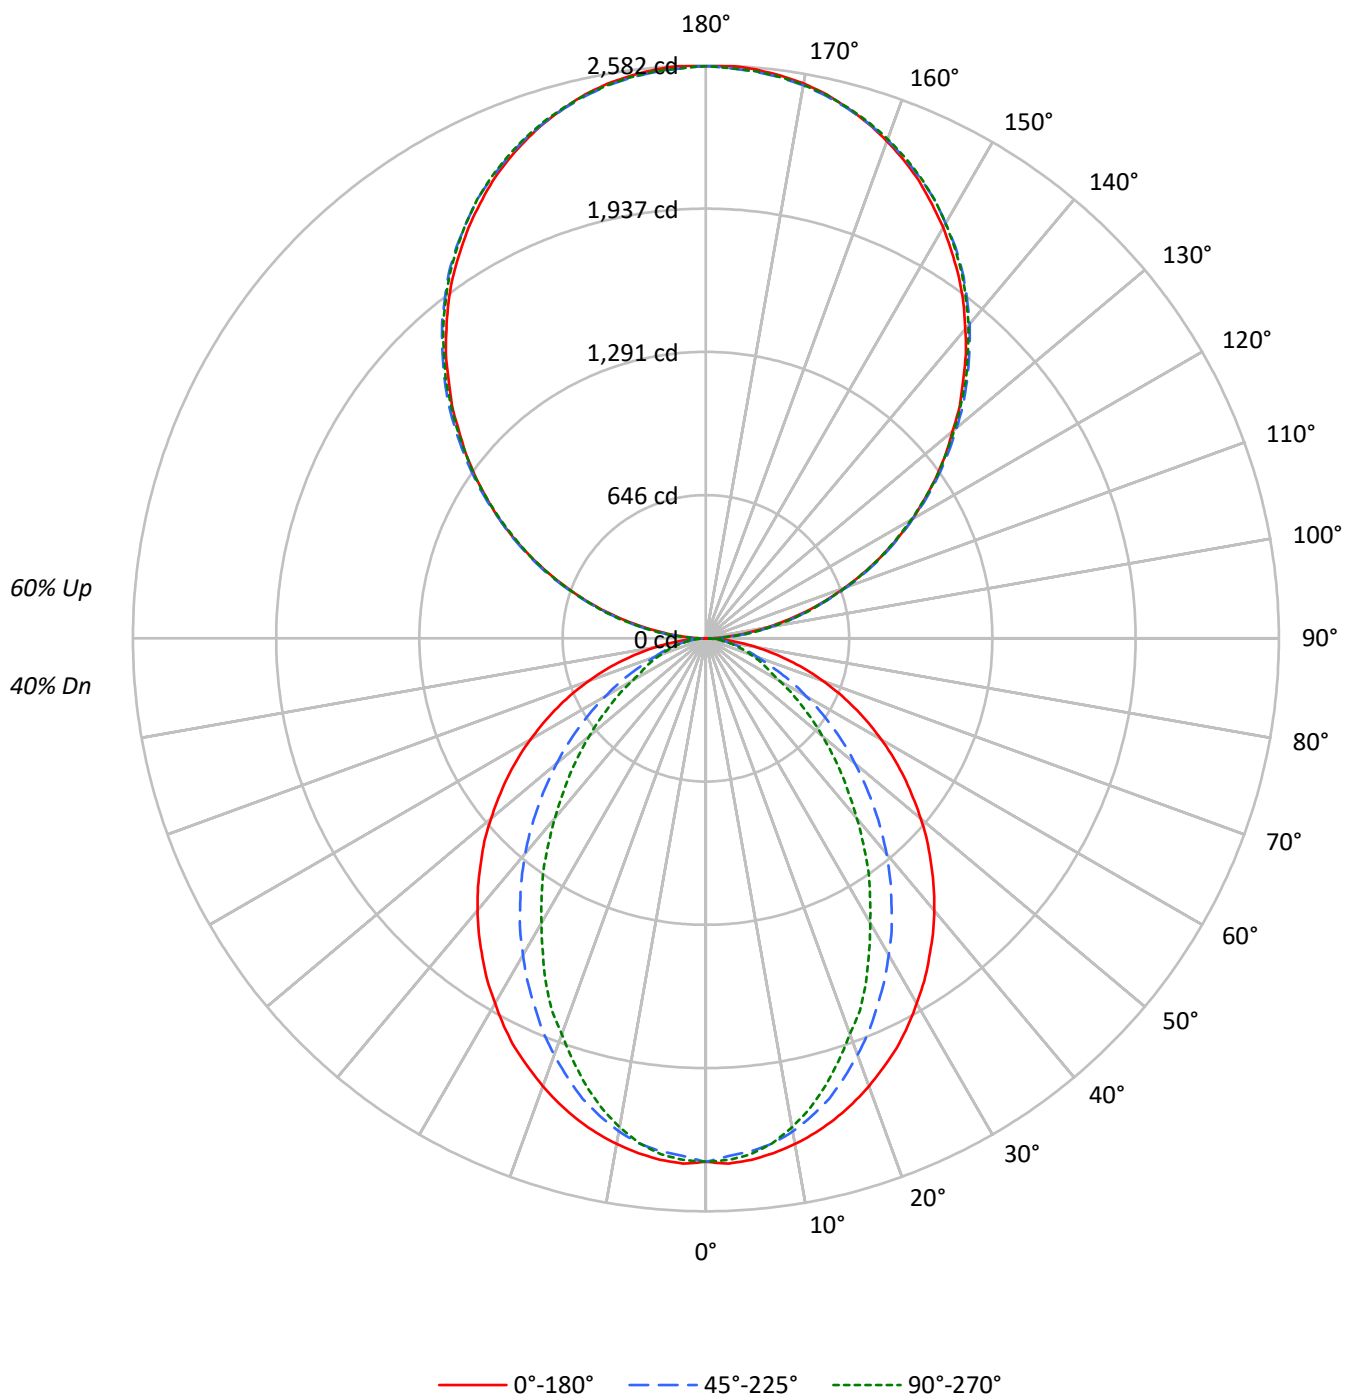

TEST NUMBER: P917386

CATALOG NUMBER: DFN2DIP-SQ3F0-070D100US930-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47
1	96	92	88	85	87	84	81	78	69	67	65	55	54	52	42	41	41
2	88	81	75	70	80	74	69	65	61	57	54	49	46	44	38	36	35
3	80	71	64	59	73	65	59	54	54	50	46	43	40	38	34	32	30
4	74	63	56	50	67	58	51	46	48	43	39	39	35	33	30	28	26
5	68	56	49	43	61	52	45	40	43	38	34	35	31	29	28	25	23
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	25	23	20
7	58	46	38	33	53	42	35	31	35	30	27	29	25	22	23	20	18
8	54	42	34	29	49	38	32	27	32	27	24	27	23	20	21	19	17
9	50	38	31	26	45	35	29	24	30	25	21	25	21	18	20	17	15
10	47	35	28	23	43	32	26	22	27	22	19	23	19	16	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2703	2703	2703
5°	2705	2658	2676
10°	2677	2604	2588
15°	2638	2516	2453
20°	2588	2396	2287
25°	2536	2261	2126
30°	2467	2124	1924
35°	2400	1976	1746
40°	2331	1823	1541
45°	2251	1653	1357
50°	2168	1482	1176
55°	2082	1300	1002
60°	1982	1110	824
65°	1866	916	741
70°	1726	736	669
75°	1550	645	607
80°	1295	536	523
85°	878	349	388

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2595 cd/sqm

TEST NUMBER: P917386

CATALOG NUMBER: DFN2DIP-SQ3F0-070D100US930-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	221.1	1.8
10°-20°	606.9	5.0
20°-30°	852.0	7.1
30°-40°	928.8	7.7
40°-50°	853.6	7.1
50°-60°	670.4	5.6
60°-70°	436.4	3.6
70°-80°	224.6	1.9
80°-90°	64.7	0.5
90°-100°	159.6	1.3
100°-110°	507.0	4.2
110°-120°	867.6	7.2
120°-130°	1141.0	9.5
130°-140°	1280.7	10.6
140°-150°	1255.9	10.4
150°-160°	1053.5	8.7
160°-170°	698.7	5.8
170°-180°	244.2	2.0
0°-30°	1679.9	13.9
0°-40°	2608.7	21.6
0°-60°	4132.7	34.2
0°-90°	4858.3	40.3
90°-120°	1534.1	12.7
90°-150°	5211.7	43.2
90°-180°	7208.0	59.7
0°-180°	12066.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2359	2359	2359	2359	2359	
5°	2359	2348	2320	2340	2333	224
15°	2244	2220	2147	2107	2086	632
25°	2036	1968	1827	1740	1708	937
35°	1755	1646	1458	1324	1276	1098
45°	1434	1291	1067	916	864	1108
55°	1091	924	694	566	525	975
65°	736	564	371	299	292	730
75°	393	243	171	156	154	415
85°	92	47	40	40	40	105
90°	2	28	76	72	74	12
95°	114	135	139	139	135	126
105°	468	474	479	483	483	494
115°	871	883	879	877	871	861
125°	1266	1286	1280	1272	1270	1132
135°	1638	1662	1667	1664	1658	1266
145°	1988	2004	2016	2019	2010	1242
155°	2274	2280	2287	2298	2291	1047
165°	2474	2471	2471	2487	2476	698
175°	2574	2568	2563	2578	2565	245
180°	2578	2578	2578	2578	2578	

TEST NUMBER: P917386

CATALOG NUMBER: DFN2DIP-SQ3F0-070D100US930-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2358.7	2358.7	2358.7	2358.7	2358.7
2.5°	2369.3	2358.7	2335.2	2356.7	2352.4
5°	2358.7	2348.1	2320.3	2339.5	2333.1
7.5°	2339.5	2326.8	2296.9	2305.3	2294.7
10°	2313.9	2299.0	2256.3	2249.8	2237.1
12.5°	2281.9	2262.7	2205.0	2192.3	2168.7
15°	2243.5	2219.9	2147.4	2106.9	2085.6
17.5°	2198.6	2164.5	2074.8	2027.8	1993.6
20°	2147.4	2104.6	1998.0	1944.7	1897.6
22.5°	2092.0	2042.8	1918.9	1846.4	1814.5
25°	2036.5	1968.0	1827.2	1739.8	1707.6
27.5°	1970.3	1897.6	1741.8	1641.5	1592.4
30°	1899.9	1818.6	1647.8	1539.1	1481.4
32.5°	1831.5	1733.2	1558.4	1430.2	1376.7
35°	1754.7	1645.8	1458.1	1323.6	1276.4
37.5°	1680.0	1562.4	1364.1	1216.6	1163.4
40°	1600.9	1473.0	1265.8	1114.3	1058.7
42.5°	1519.9	1383.3	1167.7	1009.6	956.4
45°	1434.5	1291.4	1067.4	915.7	864.5
47.5°	1353.4	1201.9	971.3	819.6	772.7
50°	1263.7	1112.2	877.3	729.9	685.3
52.5°	1176.1	1015.9	787.7	646.8	606.3
55°	1090.7	924.2	693.7	565.7	525.2
57.5°	1003.3	832.5	610.6	491.0	456.8
60°	913.6	742.8	522.9	414.3	380.0
62.5°	826.1	655.4	448.2	345.8	328.8
65°	736.5	563.5	371.4	299.0	292.4
67.5°	651.1	478.1	299.0	262.4	256.2
70°	561.4	394.9	247.5	226.2	217.6
72.5°	476.1	318.0	207.0	190.0	185.7
75°	392.7	243.2	170.7	155.8	153.8
77.5°	309.6	172.8	134.5	125.9	121.6
80°	232.6	123.8	102.4	94.0	94.0
82.5°	162.2	83.3	70.4	66.1	66.1
85°	91.7	46.9	40.5	40.5	40.5
87.5°	34.2	17.0	17.0	14.9	14.9
90°	2.4	28.0	76.1	71.5	73.9
92.5°	48.2	65.3	67.7	70.0	70.0
95°	113.5	135.3	139.2	139.2	135.3
97.5°	188.9	209.1	217.7	217.7	217.7
100°	276.0	293.8	300.0	300.0	297.7
102.5°	367.7	380.9	389.5	391.8	389.5
105°	468.0	474.2	478.8	482.7	482.7
107.5°	567.4	576.8	576.8	578.4	567.4
110°	663.9	676.3	676.3	676.3	670.1

TEST NUMBER: P917386

CATALOG NUMBER: DFN2DIP-SQ3F0-070D100US930-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	768.0	781.2	778.9	772.7	768.0
115°	870.7	883.0	879.2	876.9	870.7
117.5°	972.5	989.6	978.7	972.5	966.2
120°	1075.1	1092.2	1075.1	1075.1	1068.1
122.5°	1168.3	1190.1	1179.2	1173.1	1168.3
125°	1266.3	1285.7	1279.5	1272.5	1270.2
127.5°	1362.0	1386.0	1377.4	1368.2	1362.0
130°	1451.3	1479.3	1475.4	1470.7	1462.2
132.5°	1551.6	1573.4	1574.9	1564.1	1557.8
135°	1637.9	1662.0	1666.6	1664.3	1658.1
137.5°	1734.3	1753.7	1757.6	1756.1	1746.7
140°	1819.0	1838.4	1849.3	1849.3	1840.8
142.5°	1906.1	1925.5	1931.7	1934.1	1925.5
145°	1988.4	2004.0	2016.5	2018.8	2010.2
147.5°	2062.3	2081.8	2091.1	2095.0	2086.4
150°	2138.5	2151.7	2160.3	2167.2	2160.3
152.5°	2206.1	2219.3	2230.2	2238.8	2230.2
155°	2273.8	2280.0	2287.0	2297.8	2290.8
157.5°	2332.1	2336.7	2340.6	2356.1	2345.3
160°	2384.2	2388.8	2391.1	2404.3	2395.0
162.5°	2432.4	2432.4	2434.6	2449.4	2438.6
165°	2473.5	2471.2	2471.2	2486.7	2475.9
167.5°	2510.9	2503.9	2503.9	2519.4	2508.5
170°	2538.8	2532.6	2530.3	2545.9	2532.6
172.5°	2558.2	2552.0	2549.7	2565.3	2552.0
175°	2573.8	2567.6	2563.0	2578.5	2565.3
177.5°	2582.4	2576.2	2571.5	2584.7	2571.5
180°	2578.5	2578.5	2578.5	2578.5	2578.5

TEST NUMBER: P917386

CATALOG NUMBER: DFN2DIP-SQ3F0-070D100US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.58	10.34	10.63	11.38	12.79	5.54	6.30	6.59	7.34	8.75
	3H	11.25	11.93	12.30	12.98	14.41	6.72	7.40	7.77	8.45	9.87
	4H	11.85	12.49	12.92	13.55	14.98	7.16	7.80	8.23	8.86	10.29
	6H	12.27	12.86	13.34	13.91	15.36	7.47	8.06	8.55	9.12	10.57
	8H	12.39	12.95	13.47	14.02	15.46	7.56	8.12	8.64	9.19	10.63
	12H	12.45	12.98	13.53	14.05	15.51	7.60	8.13	8.68	9.20	10.66
4H	2H	9.59	10.23	10.66	11.29	12.72	6.13	6.77	7.20	7.82	9.26
	3H	11.41	11.94	12.48	13.02	14.47	7.46	8.00	8.54	9.08	10.52
	4H	12.09	12.58	13.18	13.65	15.12	8.00	8.49	9.09	9.56	11.03
	6H	12.60	13.02	13.69	14.11	15.58	8.41	8.83	9.50	9.93	11.39
	8H	12.77	13.16	13.86	14.25	15.73	8.54	8.93	9.63	10.01	11.49
	12H	12.86	13.21	13.97	14.31	15.80	8.59	8.95	9.70	10.05	11.53
8H	4H	12.05	12.44	13.15	13.53	15.01	8.27	8.67	9.37	9.75	11.23
	6H	12.61	12.93	13.73	14.06	15.54	8.78	9.10	9.90	10.24	11.71
	8H	12.82	13.11	13.94	14.22	15.71	8.97	9.25	10.09	10.36	11.86
	12H	12.96	13.20	14.08	14.31	15.84	9.08	9.33	10.20	10.43	11.97
12H	4H	12.00	12.36	13.11	13.46	14.94	8.28	8.63	9.38	9.73	11.21
	6H	12.59	12.87	13.71	13.98	15.47	8.83	9.11	9.95	10.22	11.72
	8H	12.80	13.05	13.92	14.16	15.69	9.03	9.28	10.15	10.39	11.92