

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917475

Luminaire Tested: DFN2DIP-SQ3F0-100D050US930-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917475
REPORT IS A COMBINATION OF REPORTS P901412 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-100D050US930-RLLONL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10965.8 lumens
Efficiency: N/A
Efficacy: 81.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 135.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917475

CATALOG NUMBER: DFN2DIP-SQ3F0-100D050US930-RLLONL

Luminous Intensity Polar Plot

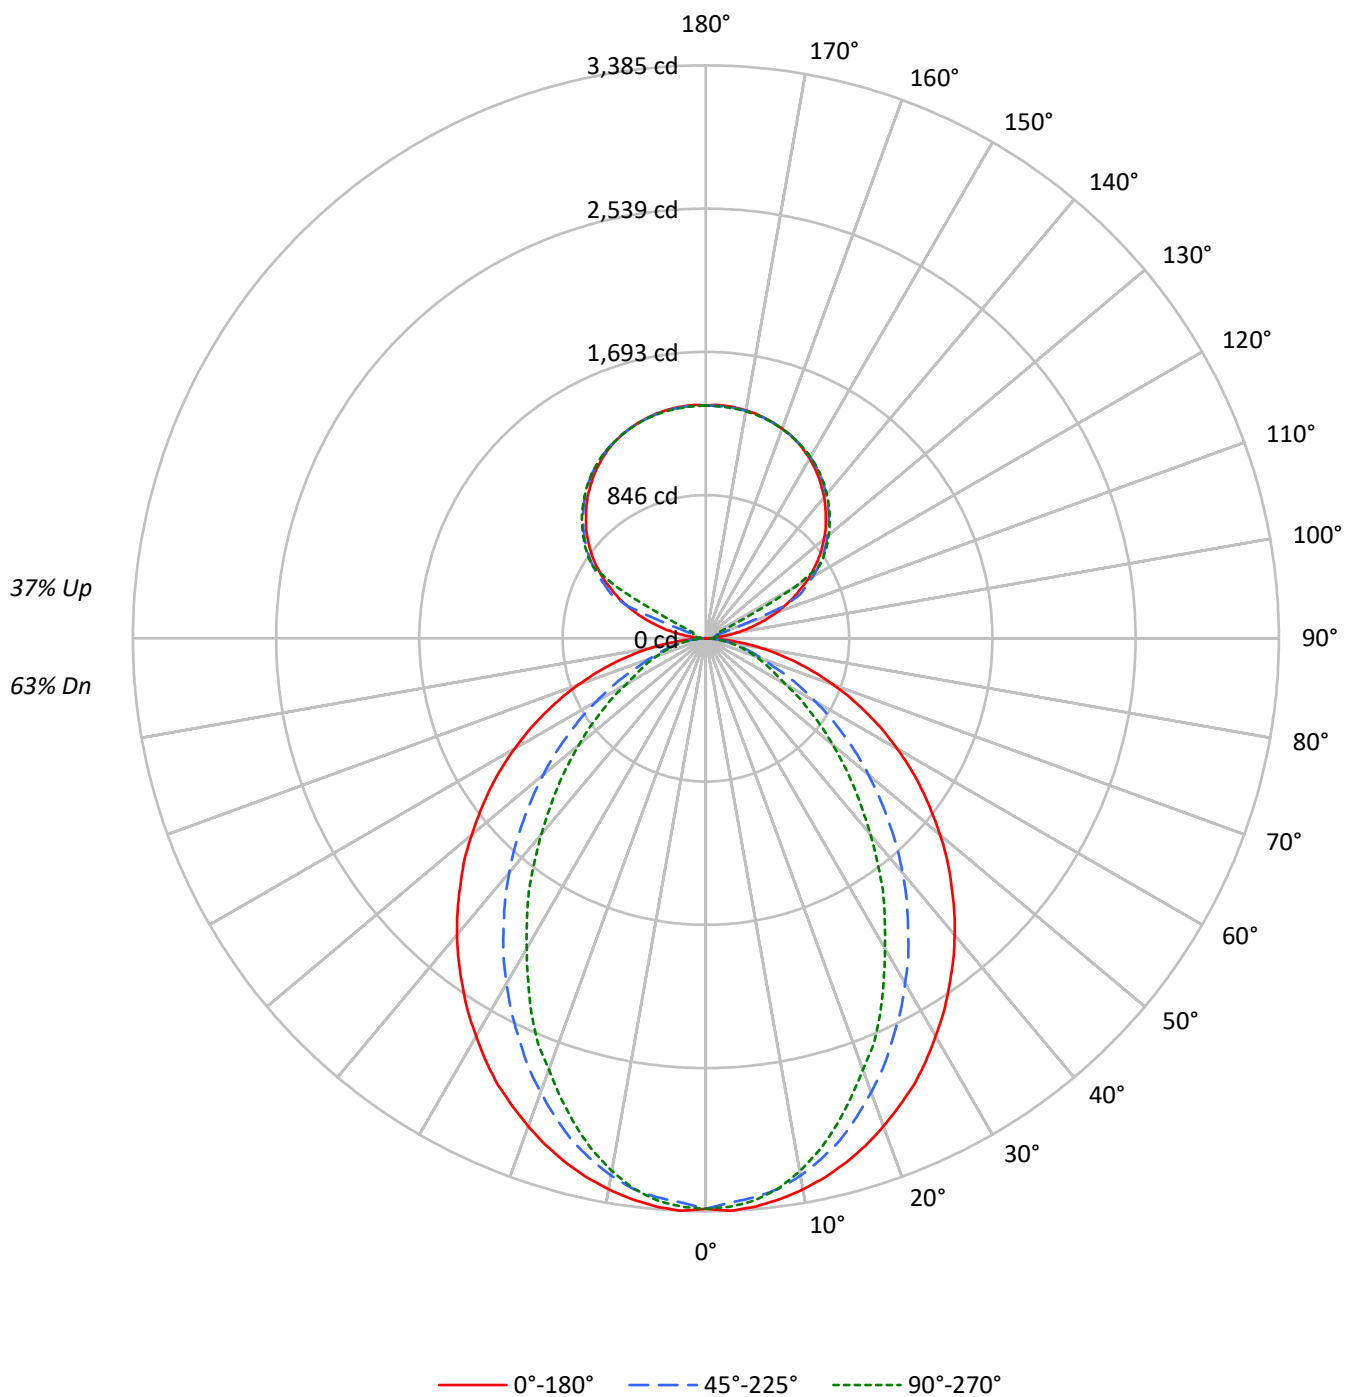

TEST NUMBER: P917475

CATALOG NUMBER: DFN2DIP-SQ3F0-100D050US930-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68
1	101	97	93	90	95	91	88	85	80	78	76	71	69	67	61	60	59
2	93	86	80	75	87	81	75	71	71	67	64	63	60	57	55	52	51
3	85	76	69	63	80	72	65	60	63	58	54	56	52	49	49	46	44
4	78	68	60	54	73	64	57	52	57	51	47	50	46	43	44	41	38
5	72	61	53	47	67	57	50	45	51	45	41	46	41	37	40	37	34
6	67	55	47	41	62	52	45	39	46	41	36	41	37	33	37	33	30
7	62	50	42	36	58	47	40	35	42	36	32	38	33	30	34	30	27
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	27	24
9	54	42	34	29	51	40	33	28	36	30	26	32	27	24	29	25	22
10	50	38	31	26	47	37	30	25	33	28	24	30	25	22	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3861	3861	3861
5°	3865	3797	3823
10°	3824	3720	3697
15°	3769	3595	3504
20°	3697	3423	3267
25°	3623	3231	3038
30°	3525	3034	2748
35°	3428	2822	2494
40°	3330	2604	2202
45°	3216	2362	1938
50°	3098	2118	1680
55°	2974	1857	1432
60°	2831	1585	1178
65°	2666	1309	1058
70°	2466	1051	956
75°	2214	921	867
80°	1850	765	748
85°	1254	498	554

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3216 cd/sqm

TEST NUMBER: P917475

CATALOG NUMBER: DFN2DIP-SQ3F0-100D050US930-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	315.8	2.9
10°-20°	866.9	7.9
20°-30°	1217.2	11.1
30°-40°	1326.8	12.1
40°-50°	1219.5	11.1
50°-60°	957.7	8.7
60°-70°	623.4	5.7
70°-80°	320.9	2.9
80°-90°	84.3	0.8
90°-100°	45.4	0.4
100°-110°	169.1	1.5
110°-120°	448.5	4.1
120°-130°	743.9	6.8
130°-140°	790.2	7.2
140°-150°	734.4	6.7
150°-160°	590.4	5.4
160°-170°	380.5	3.5
170°-180°	130.9	1.2
0°-30°	2399.9	21.9
0°-40°	3726.7	34.0
0°-60°	5903.9	53.8
0°-90°	6932.5	63.2
90°-120°	663.0	6.0
90°-150°	2931.5	26.7
90°-180°	4033.0	36.8
0°-180°	10965.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3370	3370	3370	3370	3370	
5°	3370	3354	3315	3342	3333	320
15°	3205	3171	3068	3010	2979	903
25°	2909	2812	2610	2485	2440	1338
35°	2507	2351	2083	1891	1823	1569
45°	2049	1845	1525	1308	1235	1583
55°	1558	1320	991	808	750	1392
65°	1052	805	531	427	418	1043
75°	561	348	244	223	220	593
85°	131	67	58	58	58	150
90°	1	12	20	25	27	10
95°	65	32	39	44	43	77
105°	303	333	61	72	76	323
115°	572	589	614	153	82	564
125°	809	822	841	848	851	722
135°	1002	1018	1026	1036	1034	774
145°	1162	1161	1178	1185	1180	727
155°	1279	1270	1282	1288	1280	589
165°	1348	1342	1345	1352	1345	381
175°	1379	1372	1374	1381	1371	131
180°	1376	1376	1376	1376	1376	

TEST NUMBER: P917475

CATALOG NUMBER: DFN2DIP-SQ3F0-100D050US930-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3369.6	3369.6	3369.6	3369.6	3369.6
2.5°	3384.8	3369.6	3336.0	3366.7	3360.6
5°	3369.6	3354.4	3314.6	3342.2	3333.0
7.5°	3342.2	3324.0	3281.2	3293.2	3278.1
10°	3305.5	3284.2	3223.4	3214.0	3195.9
12.5°	3260.0	3232.4	3149.9	3131.8	3098.1
15°	3204.9	3171.3	3067.7	3009.8	2979.4
17.5°	3140.9	3092.0	2963.9	2896.9	2848.1
20°	3067.7	3006.6	2854.2	2778.2	2710.9
22.5°	2988.5	2918.3	2741.3	2637.8	2592.2
25°	2909.2	2811.6	2610.3	2485.4	2439.5
27.5°	2814.7	2710.9	2488.3	2345.0	2274.8
30°	2714.1	2597.9	2354.0	2198.8	2116.3
32.5°	2616.5	2476.0	2226.3	2043.1	1966.7
35°	2506.7	2351.2	2082.9	1890.8	1823.4
37.5°	2400.0	2232.0	1948.6	1738.1	1662.0
40°	2287.1	2104.3	1808.2	1591.8	1512.5
42.5°	2171.2	1976.1	1668.2	1442.3	1366.3
45°	2049.3	1844.8	1524.9	1308.1	1234.9
47.5°	1933.5	1717.0	1387.6	1170.8	1103.9
50°	1805.3	1588.9	1253.4	1042.8	979.0
52.5°	1680.1	1451.4	1125.3	924.0	866.1
55°	1558.1	1320.4	991.0	808.2	750.2
57.5°	1433.3	1189.3	872.3	701.4	652.6
60°	1305.1	1061.2	747.1	591.7	542.9
62.5°	1180.2	936.3	640.3	494.1	469.8
65°	1052.1	804.9	530.6	427.1	417.7
67.5°	930.2	683.0	427.1	375.0	365.9
70°	802.0	564.3	353.6	323.2	311.0
72.5°	680.0	454.2	295.7	271.4	265.3
75°	561.0	347.5	243.9	222.6	219.6
77.5°	442.3	246.9	192.2	179.9	173.7
80°	332.2	177.0	146.3	134.3	134.3
82.5°	231.6	119.0	100.6	94.5	94.5
85°	131.0	66.9	57.9	57.9	57.9
87.5°	48.8	24.3	24.3	21.4	21.4
90°	1.0	11.9	19.9	24.9	26.8
92.5°	24.9	21.0	23.9	25.9	26.8
95°	64.7	31.8	38.8	43.9	42.8
97.5°	116.4	34.9	50.7	53.8	54.7
100°	176.3	39.9	56.7	64.7	66.7
102.5°	241.9	239.9	58.8	69.6	72.7
105°	302.6	332.6	60.7	71.7	75.7
107.5°	373.3	398.1	62.8	73.6	77.7
110°	441.1	461.9	174.2	74.7	78.6

TEST NUMBER: P917475

CATALOG NUMBER: DFN2DIP-SQ3F0-100D050US930-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	504.8	522.6	505.7	76.6	79.7
115°	572.4	589.3	614.2	153.4	81.7
117.5°	631.1	651.0	668.1	525.5	264.8
120°	696.8	711.8	729.7	741.7	607.2
122.5°	752.5	768.5	788.5	794.4	795.5
125°	809.3	822.3	841.2	848.2	851.2
127.5°	861.0	875.0	890.1	899.9	900.9
130°	909.9	925.9	936.7	947.7	946.8
132.5°	959.7	972.7	983.5	992.5	991.6
135°	1001.5	1017.5	1026.3	1036.4	1034.4
137.5°	1045.2	1057.2	1067.2	1077.2	1074.2
140°	1088.0	1096.1	1106.9	1115.9	1111.0
142.5°	1124.0	1131.0	1143.9	1151.8	1146.8
145°	1161.8	1160.7	1177.6	1184.6	1179.7
147.5°	1194.6	1191.6	1208.5	1213.5	1209.6
150°	1226.5	1219.5	1235.4	1241.4	1236.4
152.5°	1253.3	1245.4	1260.3	1266.3	1259.3
155°	1279.2	1270.3	1282.2	1288.2	1280.3
157.5°	1300.1	1292.2	1301.1	1308.1	1300.1
160°	1318.1	1312.1	1318.1	1324.0	1317.0
162.5°	1333.9	1328.0	1332.9	1339.9	1331.0
165°	1347.9	1342.0	1344.9	1351.8	1344.9
167.5°	1358.9	1352.8	1355.9	1362.9	1353.9
170°	1367.8	1361.8	1363.8	1370.8	1361.8
172.5°	1373.8	1367.8	1369.9	1376.8	1367.8
175°	1378.8	1371.7	1373.8	1380.7	1370.8
177.5°	1380.7	1373.8	1374.8	1381.8	1372.8
180°	1375.7	1375.7	1375.7	1375.7	1375.7

TEST NUMBER: P917475

CATALOG NUMBER: DFN2DIP-SQ3F0-100D050US930-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.96	13.91	13.80	14.77	15.84	8.92	9.87	9.76	10.73	11.80
	3H	14.64	15.49	15.50	16.36	17.46	10.11	10.96	10.97	11.83	12.93
	4H	15.25	16.05	16.12	16.93	18.04	10.56	11.36	11.43	12.24	13.35
	6H	15.68	16.42	16.56	17.30	18.42	10.88	11.62	11.77	12.50	13.63
	8H	15.80	16.51	16.70	17.41	18.53	10.97	11.68	11.87	12.58	13.70
	12H	15.87	16.54	16.76	17.43	18.58	11.02	11.69	11.92	12.58	13.73
4H	2H	12.99	13.79	13.87	14.67	15.78	9.53	10.33	10.40	11.20	12.31
	3H	14.83	15.49	15.71	16.40	17.52	10.88	11.55	11.77	12.46	13.58
	4H	15.52	16.12	16.42	17.03	18.18	11.43	12.03	12.33	12.94	14.09
	6H	16.04	16.56	16.95	17.49	18.64	11.85	12.37	12.76	13.30	14.45
	8H	16.21	16.70	17.13	17.62	18.79	11.97	12.46	12.89	13.38	14.55
	12H	16.31	16.75	17.24	17.69	18.86	12.04	12.48	12.98	13.42	14.59
8H	4H	15.49	15.98	16.41	16.90	18.07	11.71	12.20	12.63	13.12	14.29
	6H	16.06	16.46	17.00	17.43	18.59	12.23	12.63	13.17	13.60	14.76
	8H	16.27	16.63	17.22	17.58	18.77	12.42	12.77	13.37	13.73	14.91
	12H	16.41	16.73	17.37	17.67	18.91	12.53	12.85	13.49	13.80	15.03
12H	4H	15.45	15.89	16.38	16.83	18.00	11.72	12.16	12.66	13.10	14.27
	6H	16.03	16.39	16.98	17.35	18.53	12.28	12.63	13.23	13.59	14.77
	8H	16.26	16.57	17.21	17.52	18.75	12.49	12.80	13.44	13.75	14.98