

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917486

Luminaire Tested: DFN2DIP-SQ3F0-100D080US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917486
REPORT IS A COMBINATION OF REPORTS P899946 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-100D080US930-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 12702.4 lumens
Efficiency: N/A
Efficacy: 79.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 158.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917486
CATALOG NUMBER: DFN2DIP-SQ3F0-100D080US930-RLFL

Luminous Intensity Polar Plot

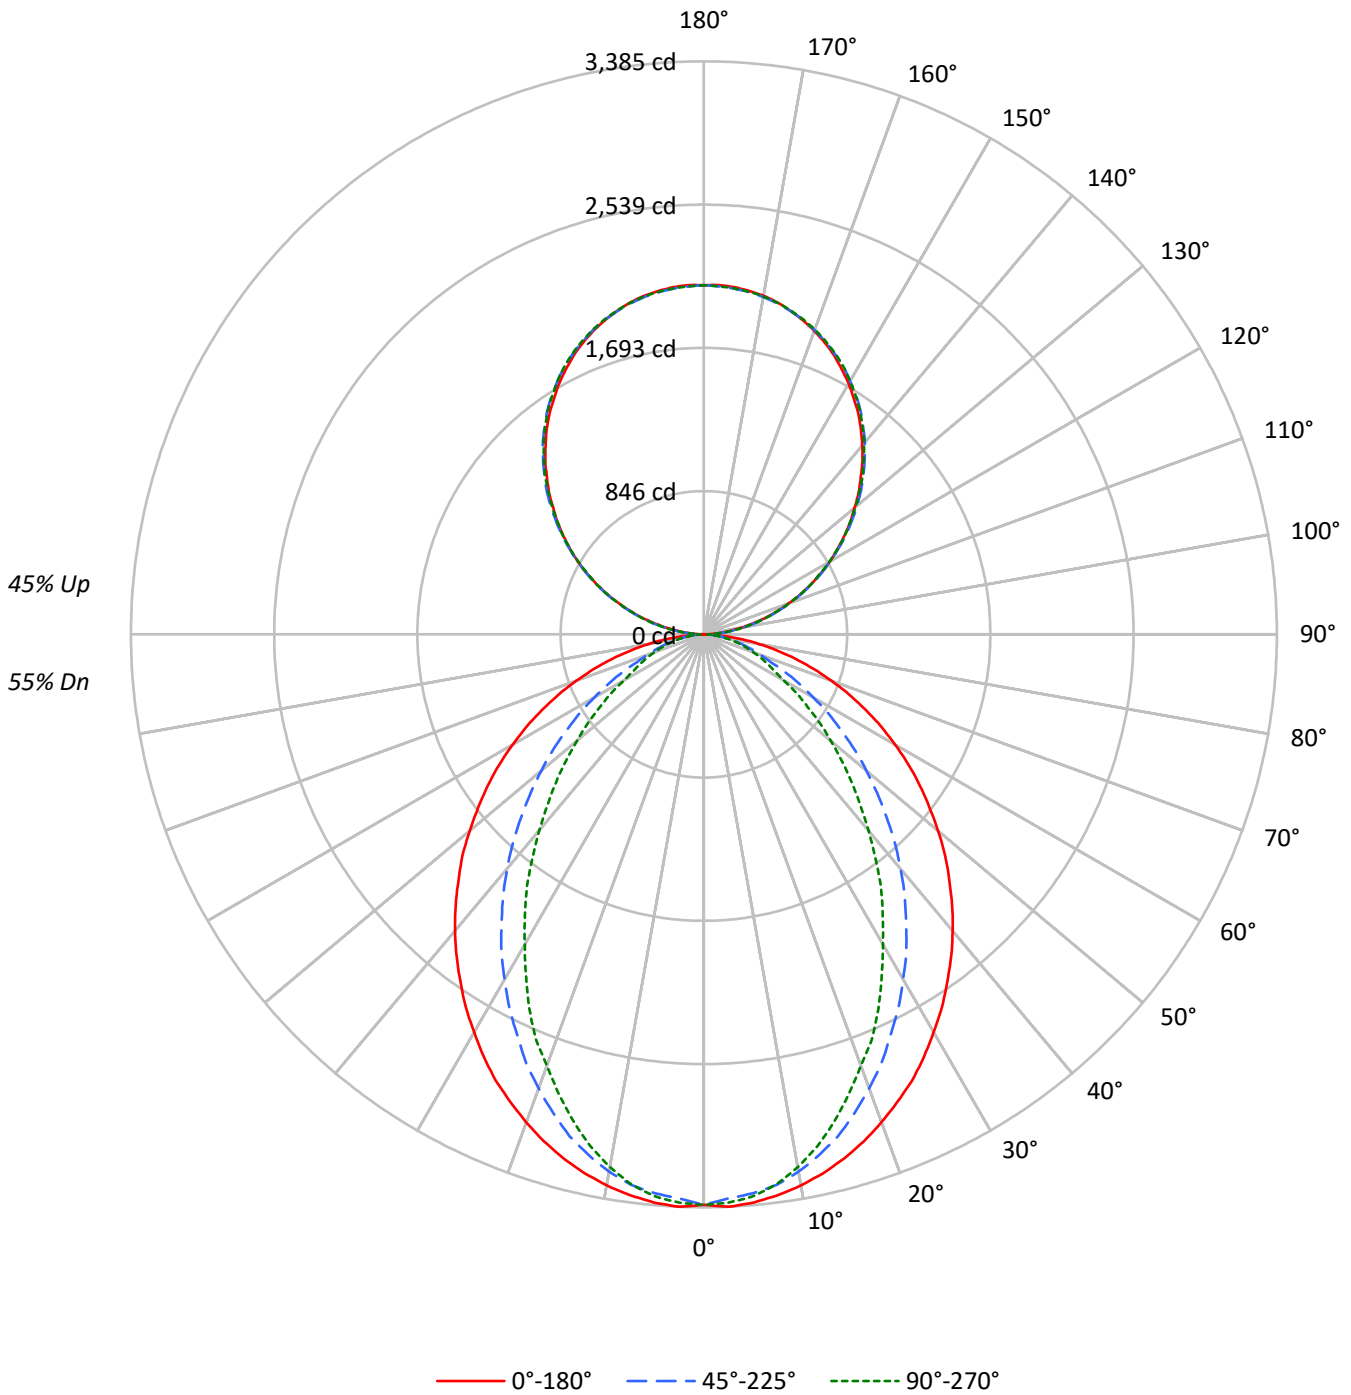



TEST NUMBER: P917486
 CATALOG NUMBER: DFN2DIP-SQ3F0-100D080US930-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60	60	60	60	55
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	54	53	52	54	53	52	47
2	91	84	78	73	84	78	73	69	67	63	60	57	55	52	48	46	45	48	46	45	40
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	43	41	39	43	41	39	35
4	76	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34	39	36	34	30
5	70	59	51	45	65	55	48	43	48	43	38	42	37	34	35	32	30	35	32	30	27
6	65	53	45	40	60	50	43	38	44	38	34	38	33	30	32	29	26	32	29	26	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24	30	26	24	21
8	56	44	36	31	52	41	34	30	36	31	27	32	27	24	27	24	21	27	24	21	19
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	25	22	19	25	22	19	17
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	20	18	24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3861	3861	3861
5°	3865	3797	3823
10°	3824	3720	3697
15°	3769	3595	3504
20°	3697	3423	3267
25°	3623	3231	3038
30°	3525	3034	2748
35°	3428	2822	2494
40°	3330	2604	2202
45°	3216	2362	1938
50°	3098	2118	1680
55°	2974	1857	1432
60°	2831	1585	1178
65°	2666	1309	1058
70°	2466	1051	956
75°	2214	921	867
80°	1850	765	748
85°	1254	498	554

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3216 cd/sqm



TEST NUMBER: P917486

CATALOG NUMBER: DFN2DIP-SQ3F0-100D080US930-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	315.8	2.5
10°-20°	866.9	6.8
20°-30°	1217.2	9.6
30°-40°	1326.8	10.4
40°-50°	1219.5	9.6
50°-60°	957.7	7.5
60°-70°	623.4	4.9
70°-80°	320.9	2.5
80°-90°	87.8	0.7
90°-100°	127.6	1.0
100°-110°	405.6	3.2
110°-120°	694.1	5.5
120°-130°	912.8	7.2
130°-140°	1024.6	8.1
140°-150°	1004.7	7.9
150°-160°	842.8	6.6
160°-170°	558.9	4.4
170°-180°	195.4	1.5
0°-30°	2399.9	18.9
0°-40°	3726.7	29.3
0°-60°	5903.9	46.5
0°-90°	6935.9	54.6
90°-120°	1227.3	9.7
90°-150°	4169.4	32.8
90°-180°	5766.0	45.4
0°-180°	12702.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3370	3370	3370	3370	3370	
5°	3370	3354	3315	3342	3333	320
15°	3205	3171	3068	3010	2979	903
25°	2909	2812	2610	2485	2440	1338
35°	2507	2351	2083	1891	1823	1569
45°	2049	1845	1525	1308	1235	1583
55°	1558	1320	991	808	750	1392
65°	1052	805	531	427	418	1043
75°	561	348	244	223	220	593
85°	131	67	58	58	58	150
90°	2	22	61	57	59	12
95°	91	108	111	111	108	101
105°	374	379	383	386	386	395
115°	696	706	703	702	696	689
125°	1013	1029	1024	1018	1016	905
135°	1310	1330	1333	1332	1326	1013
145°	1591	1603	1613	1615	1608	994
155°	1819	1824	1830	1838	1833	837
165°	1979	1977	1977	1989	1981	558
175°	2059	2054	2050	2063	2052	196
180°	2063	2063	2063	2063	2063	



TEST NUMBER: P917486

CATALOG NUMBER: DFN2DIP-SQ3F0-100D080US930-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3369.6	3369.6	3369.6	3369.6	3369.6
2.5°	3384.8	3369.6	3336.0	3366.7	3360.6
5°	3369.6	3354.4	3314.6	3342.2	3333.0
7.5°	3342.2	3324.0	3281.2	3293.2	3278.1
10°	3305.5	3284.2	3223.4	3214.0	3195.9
12.5°	3260.0	3232.4	3149.9	3131.8	3098.1
15°	3204.9	3171.3	3067.7	3009.8	2979.4
17.5°	3140.9	3092.0	2963.9	2896.9	2848.1
20°	3067.7	3006.6	2854.2	2778.2	2710.9
22.5°	2988.5	2918.3	2741.3	2637.8	2592.2
25°	2909.2	2811.6	2610.3	2485.4	2439.5
27.5°	2814.7	2710.9	2488.3	2345.0	2274.8
30°	2714.1	2597.9	2354.0	2198.8	2116.3
32.5°	2616.5	2476.0	2226.3	2043.1	1966.7
35°	2506.7	2351.2	2082.9	1890.8	1823.4
37.5°	2400.0	2232.0	1948.6	1738.1	1662.0
40°	2287.1	2104.3	1808.2	1591.8	1512.5
42.5°	2171.2	1976.1	1668.2	1442.3	1366.3
45°	2049.3	1844.8	1524.9	1308.1	1234.9
47.5°	1933.5	1717.0	1387.6	1170.8	1103.9
50°	1805.3	1588.9	1253.4	1042.8	979.0
52.5°	1680.1	1451.4	1125.3	924.0	866.1
55°	1558.1	1320.4	991.0	808.2	750.2
57.5°	1433.3	1189.3	872.3	701.4	652.6
60°	1305.1	1061.2	747.1	591.7	542.9
62.5°	1180.2	936.3	640.3	494.1	469.8
65°	1052.1	804.9	530.6	427.1	417.7
67.5°	930.2	683.0	427.1	375.0	365.9
70°	802.0	564.3	353.6	323.2	311.0
72.5°	680.0	454.2	295.7	271.4	265.3
75°	561.0	347.5	243.9	222.6	219.6
77.5°	442.3	246.9	192.2	179.9	173.7
80°	332.2	177.0	146.3	134.3	134.3
82.5°	231.6	119.0	100.6	94.5	94.5
85°	131.0	66.9	57.9	57.9	57.9
87.5°	48.8	24.3	24.3	21.4	21.4
90°	1.9	22.4	61.0	57.2	59.1
92.5°	38.6	52.3	54.1	55.9	55.9
95°	90.8	108.2	111.3	111.3	108.2
97.5°	151.2	167.3	174.1	174.1	174.1
100°	220.8	235.1	240.0	240.0	238.1
102.5°	294.2	304.8	311.5	313.4	311.5
105°	374.4	379.4	383.1	386.2	386.2
107.5°	454.0	461.5	461.5	462.7	454.0
110°	531.1	541.0	541.0	541.0	536.1



TEST NUMBER: P917486

CATALOG NUMBER: DFN2DIP-SQ3F0-100D080US930-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	614.4	625.0	623.1	618.2	614.4
115°	696.5	706.5	703.4	701.5	696.5
117.5°	778.0	791.7	782.9	778.0	773.0
120°	860.1	873.8	860.1	860.1	854.4
122.5°	934.7	952.1	943.4	938.4	934.7
125°	1013.0	1028.6	1023.6	1018.0	1016.2
127.5°	1089.6	1108.8	1102.0	1094.5	1089.6
130°	1161.1	1183.4	1180.3	1176.6	1169.8
132.5°	1241.3	1258.7	1260.0	1251.2	1246.3
135°	1310.3	1329.6	1333.3	1331.5	1326.5
137.5°	1387.4	1403.0	1406.1	1404.8	1397.3
140°	1455.2	1470.7	1479.4	1479.4	1472.6
142.5°	1524.9	1540.4	1545.4	1547.3	1540.4
145°	1590.8	1603.2	1613.1	1615.0	1608.2
147.5°	1649.8	1665.4	1672.8	1676.0	1669.2
150°	1710.8	1721.3	1728.2	1733.8	1728.2
152.5°	1764.9	1775.5	1784.2	1791.0	1784.2
155°	1819.0	1824.0	1829.6	1838.3	1832.7
157.5°	1865.6	1869.4	1872.5	1884.9	1876.2
160°	1907.3	1911.1	1912.9	1923.5	1916.0
162.5°	1945.9	1945.9	1947.7	1959.6	1950.8
165°	1978.8	1976.9	1976.9	1989.4	1980.7
167.5°	2008.7	2003.1	2003.1	2015.5	2006.8
170°	2031.1	2026.1	2024.2	2036.7	2026.1
172.5°	2046.6	2041.7	2039.8	2052.2	2041.7
175°	2059.0	2054.1	2050.3	2062.8	2052.2
177.5°	2065.9	2060.9	2057.2	2067.8	2057.2
180°	2062.8	2062.8	2062.8	2062.8	2062.8



TEST NUMBER: P917486
 CATALOG NUMBER: DFN2DIP-SQ3F0-100D080US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.22	13.09	13.15	14.03	15.24	8.19	9.05	9.11	9.99	11.20
	3H	13.90	14.68	14.84	15.62	16.86	9.37	10.15	10.31	11.09	12.33
	4H	14.51	15.24	15.46	16.19	17.43	9.82	10.55	10.77	11.50	12.74
	6H	14.93	15.60	15.89	16.56	17.81	10.14	10.81	11.10	11.77	13.02
	8H	15.05	15.70	16.02	16.67	17.92	10.22	10.87	11.19	11.84	13.09
	12H	15.11	15.73	16.09	16.69	17.97	10.27	10.88	11.24	11.84	13.12
4H	2H	12.25	12.98	13.20	13.93	15.17	8.78	9.52	9.74	10.47	11.71
	3H	14.07	14.68	15.04	15.67	16.92	10.13	10.74	11.10	11.72	12.98
	4H	14.76	15.32	15.74	16.30	17.57	10.67	11.23	11.65	12.21	13.48
	6H	15.28	15.76	16.26	16.75	18.03	11.09	11.57	12.08	12.57	13.84
	8H	15.45	15.90	16.44	16.89	18.18	11.21	11.66	12.20	12.65	13.94
	12H	15.54	15.95	16.55	16.95	18.25	11.28	11.68	12.28	12.69	13.98
8H	4H	14.73	15.18	15.72	16.17	17.46	10.95	11.40	11.94	12.39	13.68
	6H	15.30	15.66	16.31	16.70	17.99	11.47	11.83	12.48	12.87	14.16
	8H	15.51	15.83	16.53	16.85	18.16	11.65	11.98	12.67	13.00	14.31
	12H	15.64	15.93	16.67	16.95	18.30	11.77	12.05	12.79	13.07	14.42
12H	4H	14.69	15.09	15.69	16.10	17.39	10.96	11.36	11.97	12.37	13.67
	6H	15.27	15.60	16.29	16.62	17.92	11.51	11.84	12.53	12.86	14.17
	8H	15.49	15.77	16.51	16.79	18.14	11.72	12.01	12.74	13.02	14.37