

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P919999

Luminaire Tested: DFN2DIP-SQ3F0-040D080US935-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P919999
REPORT IS A COMBINATION OF REPORTS P901454 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-040D080US935-RLLONL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9746.5 lumens
Efficiency: N/A
Efficacy: 105.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 92.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P919999

CATALOG NUMBER: DFN2DIP-SQ3F0-040D080US935-RLLONL

Luminous Intensity Polar Plot

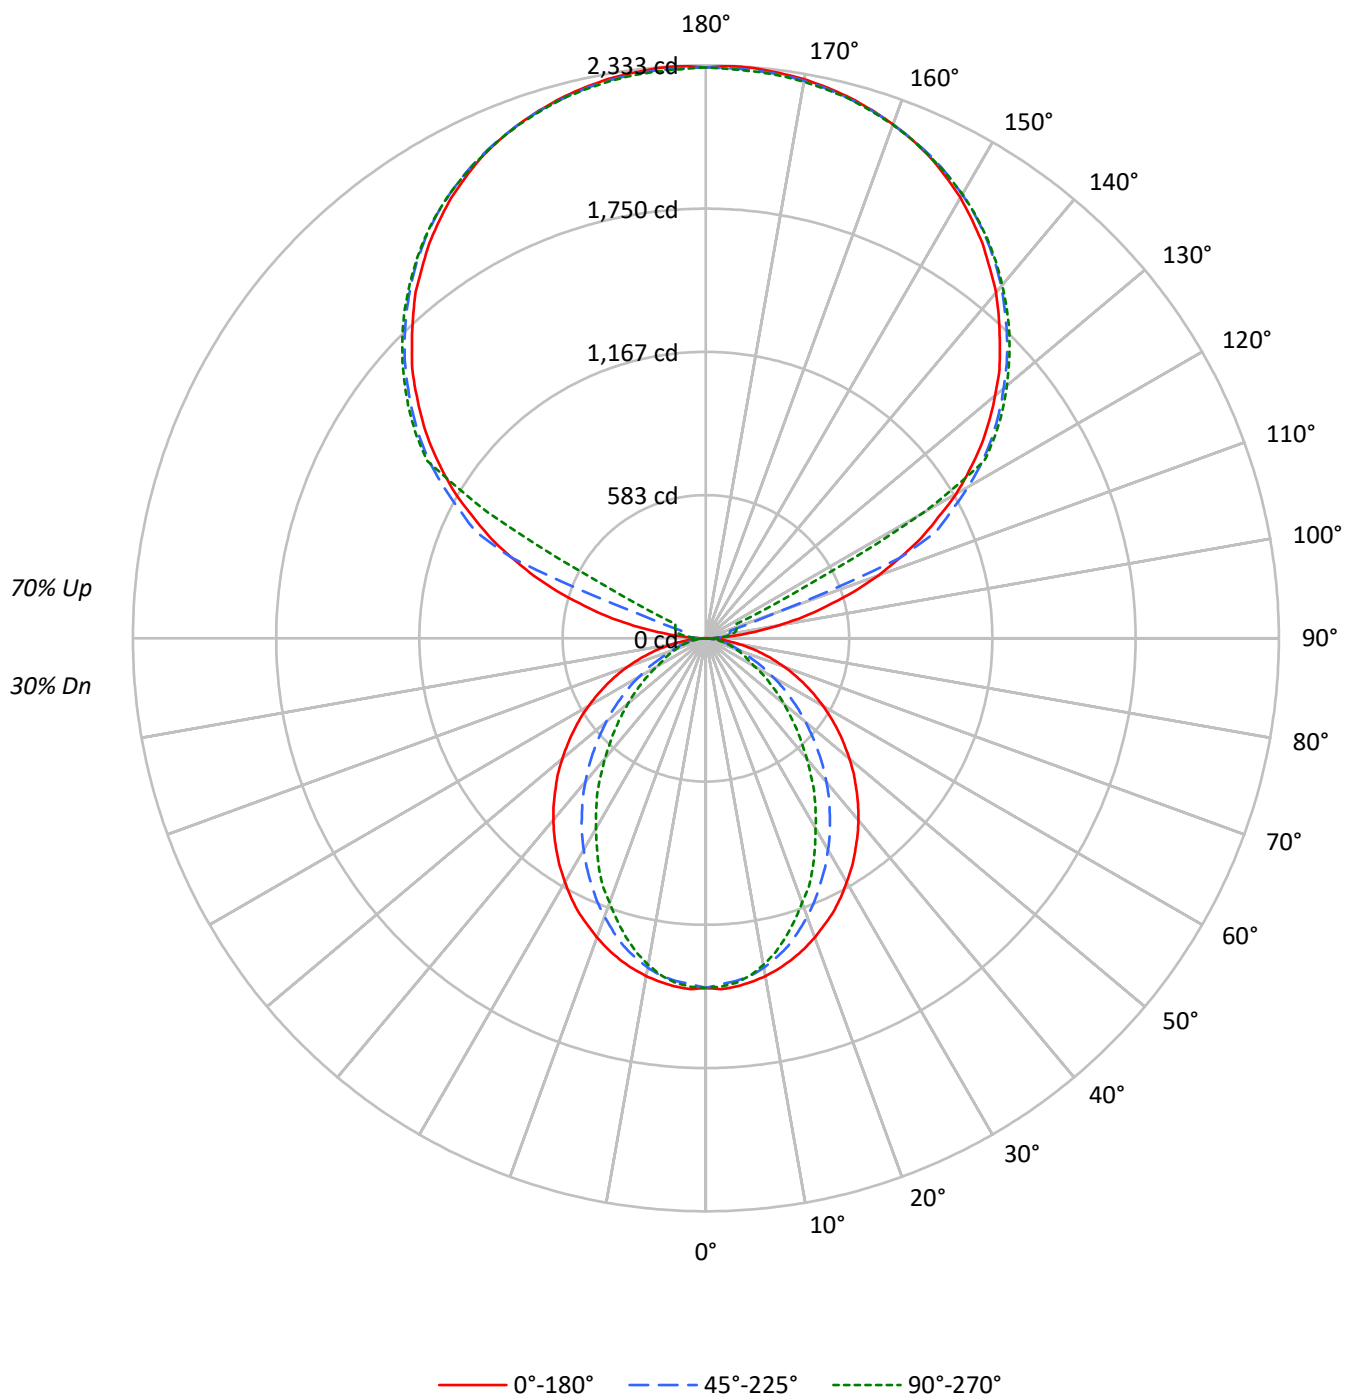

TEST NUMBER: P919999

CATALOG NUMBER: DFN2DIP-SQ3F0-040D080US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38
1	94	90	86	83	84	81	77	75	64	62	60	48	47	46	34	33	32
2	85	78	73	68	76	71	66	62	56	53	50	43	40	39	30	29	28
3	78	69	62	57	70	62	57	52	50	46	42	38	35	33	27	25	24
4	71	61	54	48	64	55	49	44	44	40	36	34	31	28	24	22	21
5	66	55	47	41	59	49	43	38	40	35	31	30	27	25	22	20	18
6	60	49	41	36	54	44	38	33	36	31	27	28	24	22	20	18	16
7	56	44	37	31	50	40	34	29	32	28	24	25	22	19	18	16	15
8	52	40	33	28	46	36	30	25	29	25	21	23	20	17	17	15	13
9	48	37	29	25	43	33	27	23	27	22	19	21	18	15	16	13	12
10	45	33	27	22	40	30	24	20	25	20	17	20	16	14	14	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1631	1631	1631
5°	1633	1604	1615
10°	1615	1571	1562
15°	1592	1518	1480
20°	1562	1446	1380
25°	1530	1365	1283
30°	1489	1282	1161
35°	1448	1192	1053
40°	1407	1100	930
45°	1358	998	819
50°	1308	894	709
55°	1256	785	605
60°	1196	670	498
65°	1126	553	447
70°	1042	444	404
75°	935	389	366
80°	781	323	316
85°	530	211	235

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1594 cd/sqm

TEST NUMBER: P919999

CATALOG NUMBER: DFN2DIP-SQ3F0-040D080US935-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.4	1.4
10°-20°	366.2	3.8
20°-30°	514.2	5.3
30°-40°	560.5	5.8
40°-50°	515.1	5.3
50°-60°	404.5	4.2
60°-70°	263.3	2.7
70°-80°	135.6	1.4
80°-90°	38.7	0.4
90°-100°	76.7	0.8
100°-110°	285.7	2.9
110°-120°	757.9	7.8
120°-130°	1256.9	12.9
130°-140°	1335.2	13.7
140°-150°	1240.9	12.7
150°-160°	997.6	10.2
160°-170°	642.8	6.6
170°-180°	221.3	2.3
0°-30°	1013.8	10.4
0°-40°	1574.2	16.2
0°-60°	2493.9	25.6
0°-90°	2931.5	30.1
90°-120°	1120.2	11.5
90°-150°	4953.3	50.8
90°-180°	6815.0	69.9
0°-180°	9746.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1423	1423	1423	1423	1423	
5°	1423	1417	1400	1412	1408	135
15°	1354	1340	1296	1271	1259	382
25°	1229	1188	1103	1050	1030	565
35°	1059	993	880	799	770	663
45°	866	779	644	553	522	668
55°	658	558	419	341	317	588
65°	444	340	224	180	176	441
75°	237	147	103	94	93	251
85°	55	28	24	24	24	64
90°	2	20	34	42	45	9
95°	109	54	66	74	72	129
105°	511	562	103	121	128	546
115°	967	996	1038	259	138	952
125°	1367	1389	1421	1433	1438	1220
135°	1692	1719	1734	1751	1748	1307
145°	1963	1961	1990	2002	1993	1228
155°	2161	2146	2167	2177	2163	996
165°	2278	2268	2272	2284	2272	643
175°	2330	2318	2321	2333	2316	222
180°	2325	2325	2325	2325	2325	

TEST NUMBER: P919999

CATALOG NUMBER: DFN2DIP-SQ3F0-040D080US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1423.4	1423.4	1423.4	1423.4	1423.4
2.5°	1429.9	1423.4	1409.2	1422.2	1419.5
5°	1423.4	1416.9	1400.2	1411.8	1408.0
7.5°	1411.8	1404.1	1386.1	1391.1	1384.7
10°	1396.4	1387.3	1361.6	1357.6	1350.0
12.5°	1377.1	1365.5	1330.6	1322.9	1308.7
15°	1353.8	1339.6	1295.9	1271.4	1258.6
17.5°	1326.8	1306.1	1252.0	1223.7	1203.1
20°	1295.9	1270.1	1205.7	1173.5	1145.1
22.5°	1262.4	1232.8	1158.0	1114.2	1095.0
25°	1228.9	1187.7	1102.6	1049.9	1030.4
27.5°	1189.0	1145.1	1051.1	990.6	960.9
30°	1146.5	1097.4	994.4	928.8	894.0
32.5°	1105.3	1045.9	940.4	863.1	830.8
35°	1058.9	993.2	879.9	798.7	770.2
37.5°	1013.8	942.9	823.1	734.2	702.1
40°	966.1	888.9	763.9	672.4	638.9
42.5°	917.1	834.7	704.6	609.2	577.1
45°	865.6	779.3	644.1	552.6	521.7
47.5°	816.7	725.3	586.2	494.6	466.3
50°	762.6	671.1	529.4	440.5	413.5
52.5°	709.7	613.1	475.4	390.3	365.8
55°	658.2	557.8	418.6	341.4	316.9
57.5°	605.5	502.4	368.4	296.3	275.7
60°	551.3	448.2	315.6	249.9	229.4
62.5°	498.6	395.5	270.4	208.7	198.5
65°	444.4	340.0	224.1	180.4	176.4
67.5°	393.0	288.5	180.4	158.4	154.5
70°	338.8	238.3	149.4	136.6	131.3
72.5°	287.3	191.9	124.9	114.7	112.1
75°	236.9	146.8	103.1	94.0	92.8
77.5°	186.8	104.3	81.2	76.0	73.4
80°	140.3	74.7	61.7	56.7	56.7
82.5°	97.9	50.3	42.5	39.9	39.9
85°	55.4	28.3	24.5	24.5	24.5
87.5°	20.7	10.2	10.2	9.0	9.0
90°	1.6	20.1	33.6	42.1	45.4
92.5°	42.1	35.4	40.4	43.7	45.4
95°	109.3	53.7	65.5	74.1	72.3
97.5°	196.7	58.9	85.7	90.9	92.5
100°	297.8	67.3	95.9	109.3	112.6
102.5°	408.7	405.4	99.3	117.6	122.9
105°	511.3	561.9	102.6	121.1	127.9
107.5°	630.8	672.7	106.1	124.4	131.2
110°	745.3	780.4	294.5	126.2	132.9

TEST NUMBER: P919999

CATALOG NUMBER: DFN2DIP-SQ3F0-040D080US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	852.9	883.0	854.5	129.4	134.7
115°	967.2	995.7	1037.8	259.1	138.0
117.5°	1066.4	1100.0	1128.8	888.0	447.5
120°	1177.5	1202.6	1233.0	1253.2	1026.1
122.5°	1271.5	1298.6	1332.3	1342.3	1344.1
125°	1367.4	1389.4	1421.3	1433.1	1438.1
127.5°	1454.9	1478.5	1503.9	1520.6	1522.2
130°	1537.4	1564.3	1582.8	1601.4	1599.7
132.5°	1621.5	1643.5	1661.9	1677.1	1675.4
135°	1692.2	1719.2	1734.1	1751.2	1747.7
137.5°	1766.2	1786.3	1803.3	1820.1	1815.1
140°	1838.4	1852.0	1870.4	1885.6	1877.1
142.5°	1899.2	1910.9	1932.7	1946.1	1937.7
145°	1963.1	1961.3	1989.9	2001.6	1993.2
147.5°	2018.4	2013.4	2041.9	2050.4	2043.8
150°	2072.3	2060.5	2087.5	2097.5	2089.1
152.5°	2117.7	2104.3	2129.4	2139.7	2127.9
155°	2161.4	2146.5	2166.6	2176.6	2163.3
157.5°	2196.7	2183.4	2198.6	2210.4	2196.7
160°	2227.1	2217.0	2227.1	2237.1	2225.3
162.5°	2253.9	2243.9	2252.3	2264.1	2248.9
165°	2277.5	2267.5	2272.5	2284.2	2272.5
167.5°	2296.0	2285.9	2291.0	2302.8	2287.7
170°	2311.3	2301.0	2304.5	2316.3	2301.0
172.5°	2321.3	2311.3	2314.6	2326.4	2311.3
175°	2329.6	2317.8	2321.3	2333.0	2316.3
177.5°	2333.0	2321.3	2323.0	2334.8	2319.6
180°	2324.6	2324.6	2324.6	2324.6	2324.6

TEST NUMBER: P919999

CATALOG NUMBER: DFN2DIP-SQ3F0-040D080US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.59	7.28	7.71	8.39	9.92	2.55	3.24	3.67	4.35	5.88
	3H	8.25	8.87	9.38	9.99	11.53	3.72	4.34	4.85	5.46	7.00
	4H	8.85	9.44	9.99	10.55	12.11	4.16	4.75	5.30	5.86	7.42
	6H	9.26	9.80	10.41	10.92	12.49	4.47	5.01	5.61	6.13	7.69
	8H	9.38	9.90	10.53	11.03	12.59	4.55	5.07	5.70	6.20	7.76
	12H	9.44	9.92	10.59	11.05	12.63	4.59	5.08	5.74	6.20	7.78
4H	2H	6.59	7.18	7.73	8.29	9.85	3.13	3.71	4.27	4.83	6.38
	3H	8.40	8.89	9.55	10.03	11.60	4.46	4.94	5.60	6.09	7.65
	4H	9.08	9.53	10.23	10.66	12.25	4.99	5.44	6.14	6.57	8.16
	6H	9.59	9.97	10.74	11.12	12.70	5.40	5.78	6.55	6.94	8.51
	8H	9.76	10.11	10.91	11.26	12.85	5.52	5.88	6.68	7.02	8.62
	12H	9.84	10.17	11.01	11.32	12.92	5.58	5.90	6.75	7.06	8.66
8H	4H	9.04	9.40	10.19	10.54	12.14	5.26	5.62	6.42	6.76	8.36
	6H	9.60	9.89	10.77	11.08	12.67	5.77	6.06	6.94	7.25	8.84
	8H	9.81	10.07	10.99	11.23	12.84	5.95	6.21	7.13	7.38	8.99
	12H	9.94	10.16	11.12	11.33	12.97	6.06	6.29	7.24	7.45	9.09
12H	4H	8.99	9.31	10.16	10.47	12.06	5.26	5.58	6.43	6.74	8.34
	6H	9.57	9.83	10.75	10.99	12.60	5.81	6.07	6.99	7.24	8.85
	8H	9.78	10.01	10.96	11.17	12.81	6.01	6.24	7.20	7.40	9.05

END OF REPORT