

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P920184

Luminaire Tested: DFN2DIP-SQ3F0-090D100US935-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P920184
REPORT IS A COMBINATION OF REPORTS P899979 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-090D100US935-FLLFLL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15291.4 lumens
Efficiency: N/A
Efficacy: 92.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 165.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P920184

CATALOG NUMBER: DFN2DIP-SQ3F0-090D100US935-FLLFLL

Luminous Intensity Polar Plot

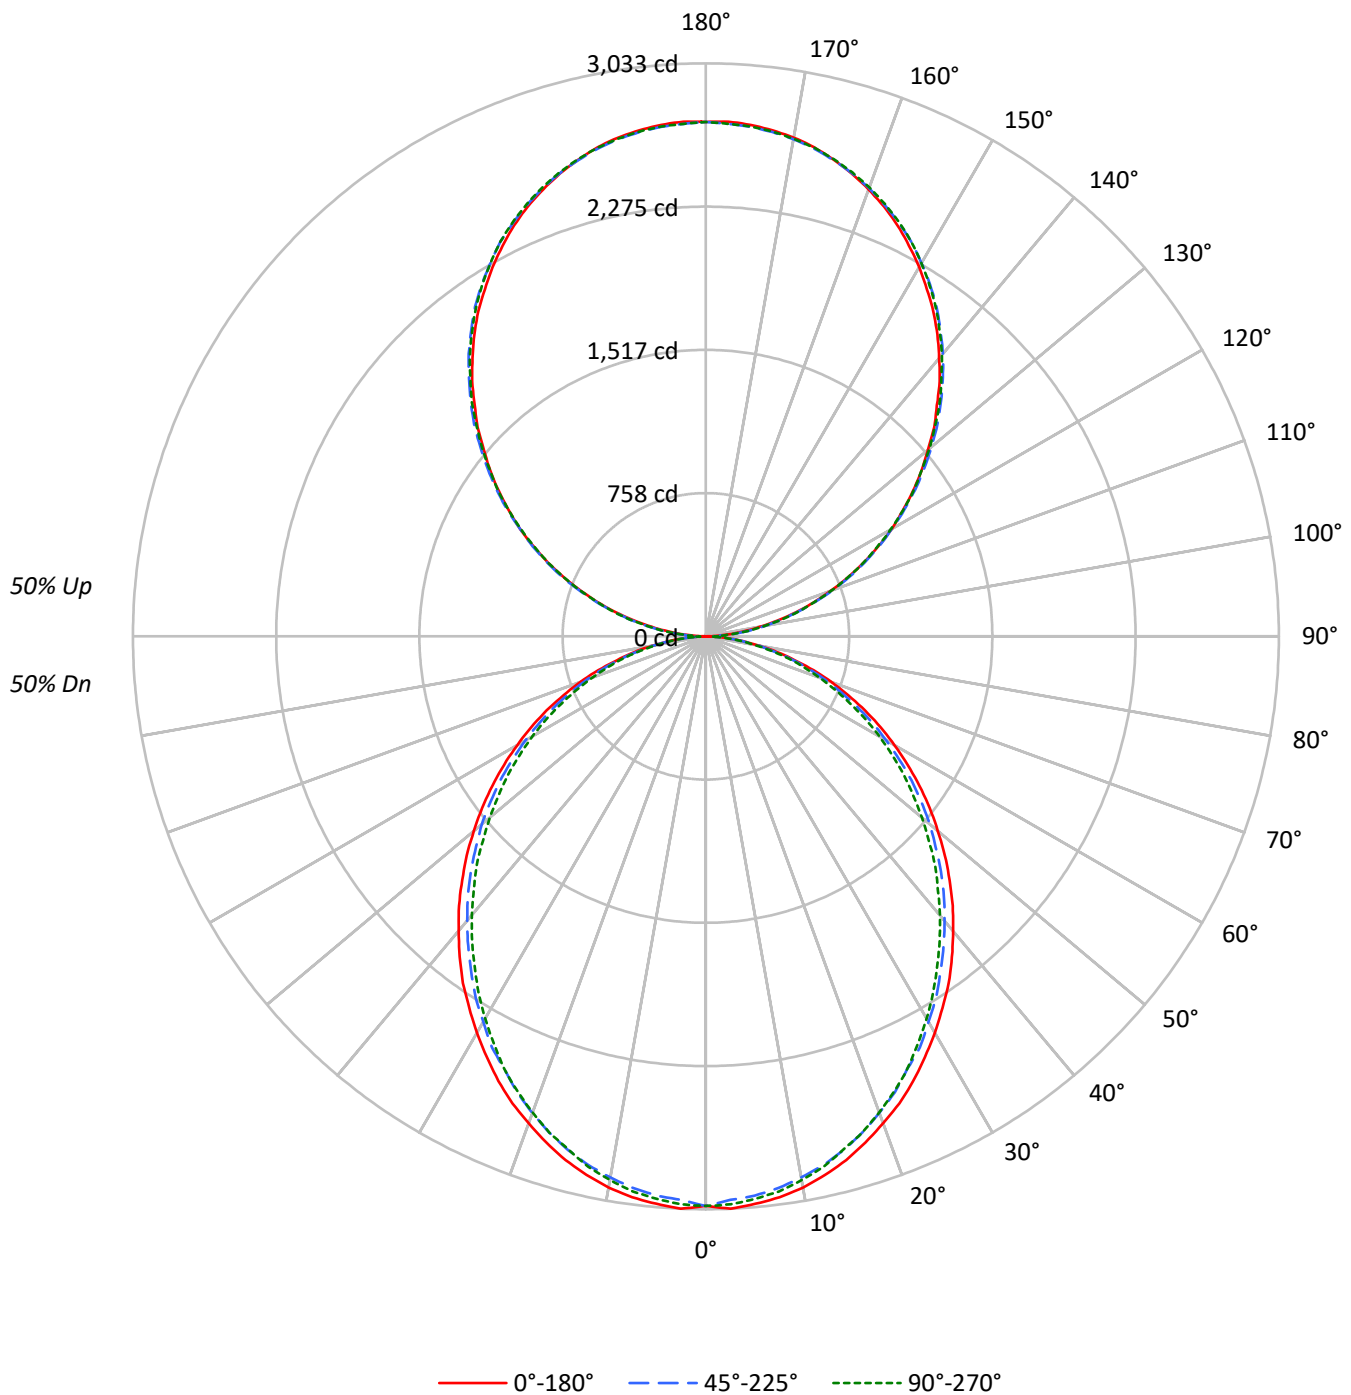

TEST NUMBER: P920184

CATALOG NUMBER: DFN2DIP-SQ3F0-090D100US935-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56
1	98	93	90	86	90	86	83	80	73	71	69	61	59	58	50	49	48
2	89	82	76	70	82	76	70	66	64	60	57	54	51	48	44	42	40
3	81	72	64	59	75	67	60	55	57	52	48	47	44	41	39	36	34
4	74	64	56	50	68	59	52	47	50	45	41	42	38	35	35	32	29
5	68	57	48	42	63	53	45	40	45	39	35	38	34	30	31	28	26
6	63	51	43	37	58	47	40	35	41	35	31	34	30	27	28	25	23
7	58	46	38	32	54	43	36	31	37	31	27	31	27	23	26	23	20
8	54	42	34	29	50	39	32	27	34	28	24	29	24	21	24	20	18
9	50	38	31	25	46	36	29	24	31	25	21	26	22	19	22	19	16
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3455	3455	3455
5°	3458	3404	3428
10°	3428	3356	3381
15°	3375	3299	3307
20°	3305	3220	3232
25°	3235	3126	3145
30°	3148	3038	3035
35°	3065	2935	2918
40°	2963	2830	2807
45°	2862	2726	2694
50°	2751	2616	2562
55°	2635	2489	2441
60°	2503	2338	2302
65°	2359	2182	2138
70°	2175	1991	1962
75°	1922	1763	1797
80°	1615	1470	1485
85°	1137	974	972

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2862 cd/sqm

TEST NUMBER: P920184

CATALOG NUMBER: DFN2DIP-SQ3F0-090D100US935-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	283.8	1.9
10°-20°	798.5	5.2
20°-30°	1173.4	7.7
30°-40°	1362.9	8.9
40°-50°	1361.2	8.9
50°-60°	1186.9	7.8
60°-70°	877.4	5.7
70°-80°	496.4	3.2
80°-90°	138.7	0.9
90°-100°	168.5	1.1
100°-110°	535.4	3.5
110°-120°	916.2	6.0
120°-130°	1204.9	7.9
130°-140°	1352.5	8.8
140°-150°	1326.3	8.7
150°-160°	1112.6	7.3
160°-170°	737.8	4.8
170°-180°	257.9	1.7
0°-30°	2255.7	14.8
0°-40°	3618.6	23.7
0°-60°	6166.7	40.3
0°-90°	7679.3	50.2
90°-120°	1620.1	10.6
90°-150°	5503.8	36.0
90°-180°	7612.0	49.8
0°-180°	15291.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3015	3015	3015	3015	3015	
5°	3015	3004	2972	2995	2989	286
15°	2870	2853	2815	2827	2812	808
25°	2598	2575	2526	2531	2526	1195
35°	2241	2212	2166	2148	2134	1400
45°	1824	1804	1760	1728	1716	1408
55°	1380	1363	1328	1293	1279	1234
65°	931	913	884	858	844	920
75°	487	481	467	449	455	520
85°	119	116	113	104	102	132
90°	2	30	80	76	78	15
95°	120	143	147	147	143	133
105°	494	501	506	510	510	522
115°	920	932	928	926	920	909
125°	1337	1358	1351	1344	1341	1195
135°	1730	1755	1760	1758	1751	1337
145°	2100	2116	2130	2132	2123	1312
155°	2401	2408	2415	2427	2419	1105
165°	2612	2610	2610	2626	2615	737
175°	2718	2712	2707	2723	2709	258
180°	2723	2723	2723	2723	2723	

TEST NUMBER: P920184

CATALOG NUMBER: DFN2DIP-SQ3F0-090D100US935-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3015.1	3015.1	3015.1	3015.1	3015.1
2.5°	3032.7	3018.2	2986.3	3015.1	3009.6
5°	3015.1	3003.8	2971.8	2994.9	2989.3
7.5°	2994.9	2977.7	2945.6	2969.1	2963.2
10°	2963.2	2942.9	2908.1	2931.2	2922.6
12.5°	2919.5	2902.3	2867.6	2881.9	2876.2
15°	2870.3	2853.1	2815.2	2826.9	2812.4
17.5°	2809.3	2792.1	2754.3	2768.8	2754.3
20°	2742.6	2725.4	2684.8	2693.4	2682.0
22.5°	2676.2	2650.1	2612.2	2612.2	2606.3
25°	2597.7	2574.6	2525.5	2531.0	2525.5
27.5°	2510.7	2490.4	2452.9	2444.3	2429.8
30°	2424.0	2400.5	2357.2	2348.5	2336.9
32.5°	2331.1	2313.8	2267.4	2249.9	2238.2
35°	2241.3	2212.3	2165.8	2148.4	2133.9
37.5°	2139.8	2113.6	2067.1	2046.9	2032.4
40°	2035.4	2012.1	1965.6	1939.7	1928.1
42.5°	1933.9	1910.6	1864.4	1835.2	1818.0
45°	1823.8	1803.5	1759.8	1728.1	1716.5
47.5°	1716.5	1696.2	1649.7	1617.7	1600.5
50°	1603.3	1588.8	1548.2	1507.6	1493.1
52.5°	1493.1	1472.8	1435.3	1403.3	1383.0
55°	1380.3	1362.7	1327.9	1293.2	1278.8
57.5°	1267.0	1252.6	1214.8	1180.0	1168.3
60°	1153.8	1142.5	1101.8	1069.9	1061.3
62.5°	1043.7	1023.4	994.5	965.6	953.9
65°	930.8	913.3	884.3	858.2	843.8
67.5°	814.8	800.1	774.2	754.0	742.3
70°	707.5	695.8	669.7	649.4	638.0
72.5°	597.4	585.7	571.2	551.0	542.3
75°	487.0	481.4	466.7	449.4	455.3
77.5°	388.5	376.9	371.0	362.4	353.8
80°	290.1	287.0	281.1	272.5	266.7
82.5°	197.2	197.2	194.4	182.7	182.7
85°	118.7	116.0	113.2	104.3	101.5
87.5°	52.3	46.4	40.6	32.0	28.9
90°	2.5	29.5	80.4	75.5	78.0
92.5°	50.9	69.0	71.5	73.9	73.9
95°	119.9	142.8	147.0	147.0	142.8
97.5°	199.5	220.8	229.9	229.9	229.9
100°	291.4	310.3	316.8	316.8	314.4
102.5°	388.3	402.3	411.3	413.7	411.3
105°	494.2	500.8	505.7	509.8	509.8
107.5°	599.3	609.2	609.2	610.8	599.3
110°	701.1	714.2	714.2	714.2	707.7

TEST NUMBER: P920184

CATALOG NUMBER: DFN2DIP-SQ3F0-090D100US935-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	811.1	825.0	822.6	816.0	811.1
115°	919.5	932.5	928.5	926.0	919.5
117.5°	1027.0	1045.1	1033.5	1027.0	1020.4
120°	1135.3	1153.4	1135.3	1135.3	1128.0
122.5°	1233.8	1256.8	1245.3	1238.8	1233.8
125°	1337.3	1357.8	1351.3	1343.8	1341.4
127.5°	1438.3	1463.7	1454.7	1444.8	1438.3
130°	1532.7	1562.2	1558.1	1553.2	1544.2
132.5°	1638.6	1661.6	1663.2	1651.7	1645.1
135°	1729.7	1755.1	1760.1	1757.6	1751.0
137.5°	1831.5	1852.0	1856.1	1854.5	1844.6
140°	1921.0	1941.5	1953.0	1953.0	1944.0
142.5°	2012.9	2033.4	2040.0	2042.5	2033.4
145°	2099.9	2116.3	2129.5	2131.9	2122.9
147.5°	2177.9	2198.5	2208.3	2212.4	2203.4
150°	2258.4	2272.3	2281.4	2288.7	2281.4
152.5°	2329.8	2343.7	2355.3	2364.3	2355.3
155°	2401.2	2407.8	2415.2	2426.6	2419.2
157.5°	2462.8	2467.7	2471.8	2488.2	2476.7
160°	2517.8	2522.7	2525.1	2539.1	2529.3
162.5°	2568.7	2568.7	2571.1	2586.7	2575.2
165°	2612.2	2609.7	2609.7	2626.1	2614.7
167.5°	2651.6	2644.2	2644.2	2660.7	2649.1
170°	2681.1	2674.6	2672.1	2688.6	2674.6
172.5°	2701.6	2695.1	2692.6	2709.0	2695.1
175°	2718.1	2711.5	2706.6	2723.0	2709.0
177.5°	2727.1	2720.6	2715.6	2729.5	2715.6
180°	2723.0	2723.0	2723.0	2723.0	2723.0

TEST NUMBER: P920184

CATALOG NUMBER: DFN2DIP-SQ3F0-090D100US935-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.56	12.43	12.52	13.40	14.67	11.12	11.98	12.07	12.95	14.22
	3H	13.22	13.99	14.19	14.97	16.26	12.73	13.50	13.70	14.48	15.77
	4H	13.80	14.54	14.79	15.52	16.82	13.31	14.04	14.29	15.03	16.33
	6H	14.20	14.88	15.19	15.87	17.18	13.70	14.38	14.69	15.37	16.68
	8H	14.30	14.95	15.30	15.95	17.26	13.80	14.45	14.80	15.45	16.76
	12H	14.35	14.96	15.35	15.96	17.30	13.84	14.45	14.84	15.45	16.79
4H	2H	12.02	12.75	13.01	13.74	15.04	11.67	12.40	12.65	13.38	14.68
	3H	13.88	14.49	14.88	15.51	16.82	13.47	14.09	14.47	15.10	16.41
	4H	14.59	15.15	15.60	16.16	17.49	14.17	14.73	15.17	15.73	17.07
	6H	15.10	15.59	16.12	16.62	17.95	14.67	15.15	15.69	16.18	17.52
	8H	15.25	15.70	16.27	16.72	18.07	14.81	15.26	15.83	16.29	17.64
	12H	15.32	15.73	16.36	16.77	18.12	14.87	15.28	15.91	16.32	17.67
8H	4H	14.79	15.24	15.80	16.26	17.61	14.41	14.86	15.42	15.88	17.23
	6H	15.41	15.78	16.45	16.85	18.19	15.03	15.40	16.07	16.46	17.81
	8H	15.63	15.96	16.68	17.01	18.37	15.24	15.56	16.28	16.61	17.98
	12H	15.76	16.05	16.81	17.09	18.50	15.35	15.63	16.40	16.68	18.09
12H	4H	14.77	15.18	15.81	16.21	17.57	14.40	14.81	15.44	15.85	17.20
	6H	15.44	15.77	16.49	16.82	18.18	15.07	15.39	16.12	16.44	17.81
	8H	15.68	15.97	16.73	17.01	18.42	15.30	15.58	16.35	16.63	18.04