

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P920190

Luminaire Tested: DFN2DIP-SQ3F0-090D110US935-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P920190
REPORT IS A COMBINATION OF REPORTS P899998 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-090D110US935-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14968.5 lumens
Efficiency: N/A
Efficacy: 86.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 173.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P920190

CATALOG NUMBER: DFN2DIP-SQ3F0-090D110US935-RLLFLL

Luminous Intensity Polar Plot

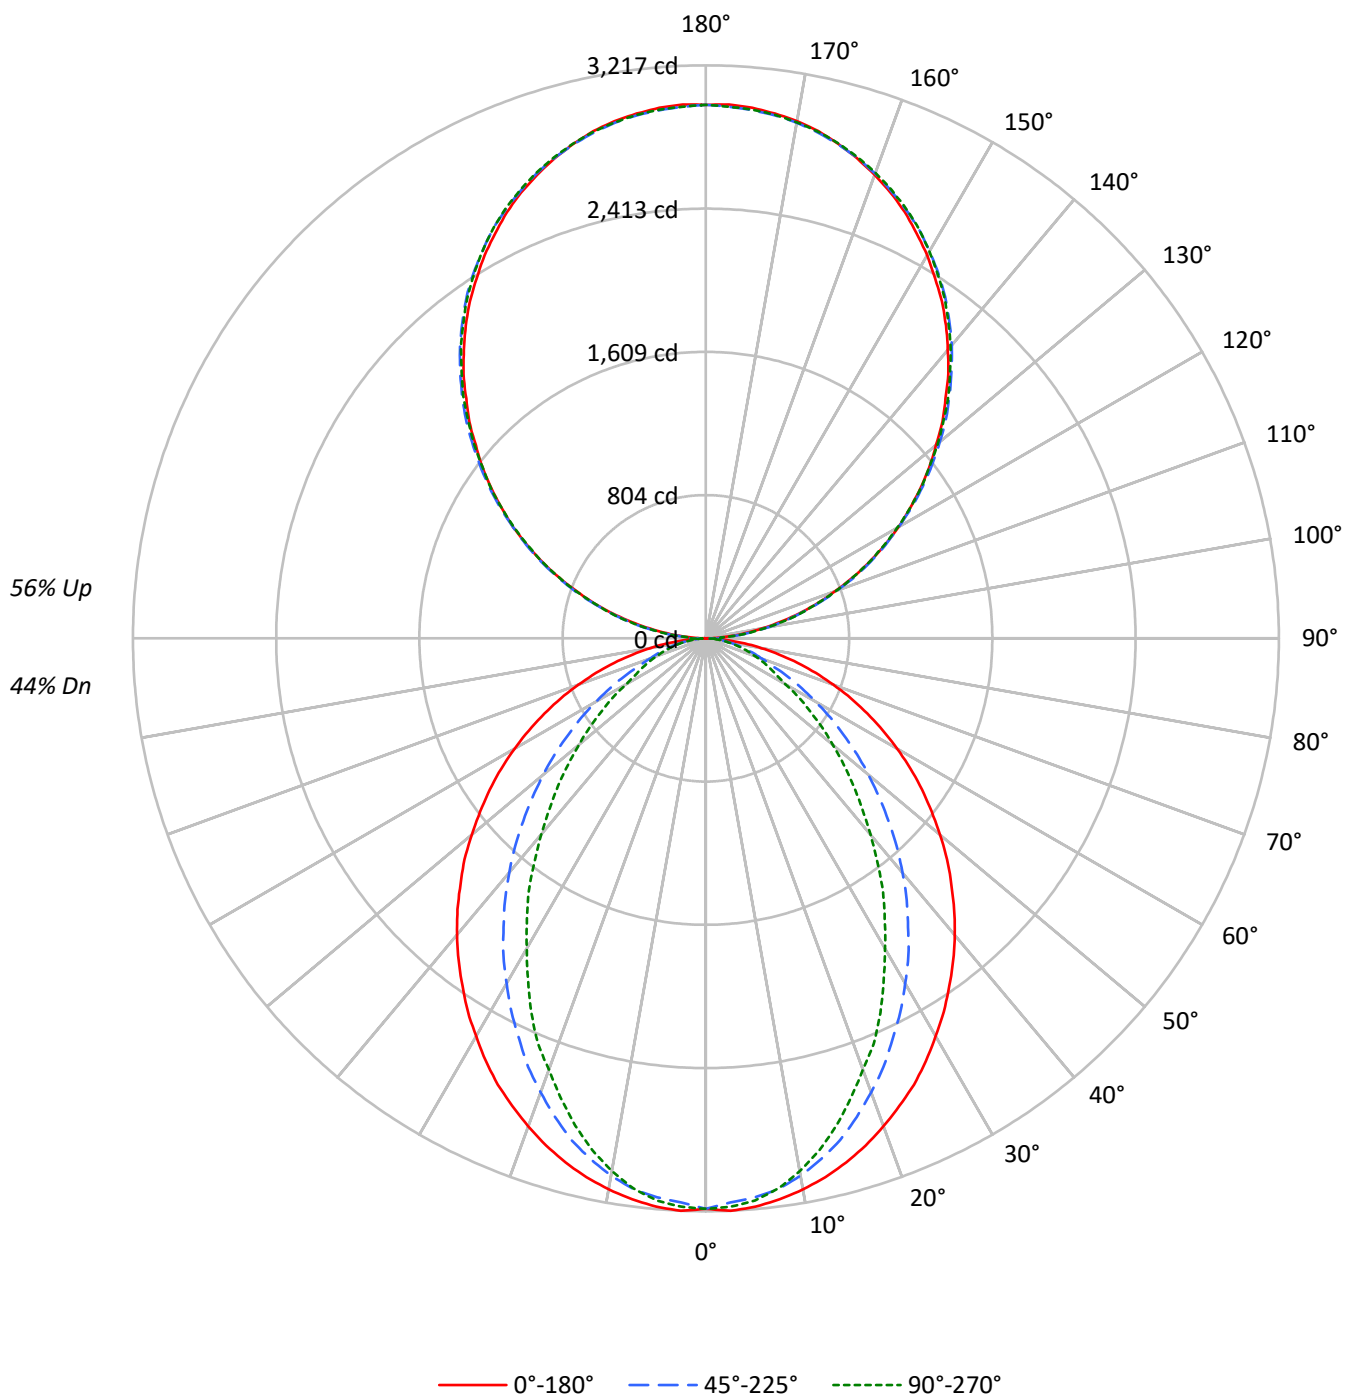

TEST NUMBER: P920190

CATALOG NUMBER: DFN2DIP-SQ3F0-090D110US935-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51
1	97	93	89	86	89	85	82	79	71	69	67	58	56	55	45	44	44
2	89	81	76	71	81	75	70	66	62	59	56	51	49	46	40	39	37
3	81	72	65	59	74	66	60	55	55	51	47	45	42	40	36	34	32
4	74	64	56	51	68	59	52	47	50	45	41	41	37	34	33	30	28
5	68	57	49	44	62	53	46	41	45	39	35	37	33	30	30	27	25
6	63	51	44	38	58	48	41	36	40	35	31	33	29	26	27	24	22
7	58	46	39	33	53	43	36	31	37	31	27	30	27	24	25	22	20
8	54	42	35	30	50	39	33	28	33	28	24	28	24	21	23	20	18
9	51	39	31	26	46	36	29	25	31	26	22	26	22	19	21	18	16
10	47	35	28	24	43	33	27	22	28	23	20	24	20	17	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3670	3670	3670
5°	3673	3609	3633
10°	3635	3536	3514
15°	3582	3417	3330
20°	3514	3253	3105
25°	3443	3071	2887
30°	3350	2883	2612
35°	3258	2682	2370
40°	3165	2475	2093
45°	3056	2245	1842
50°	2944	2013	1597
55°	2827	1765	1361
60°	2690	1507	1119
65°	2534	1244	1006
70°	2344	999	909
75°	2104	876	824
80°	1758	727	710
85°	1192	473	527

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3056 cd/sqm

TEST NUMBER: P920190

CATALOG NUMBER: DFN2DIP-SQ3F0-090D110US935-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	300.2	2.0
10°-20°	824.0	5.5
20°-30°	1156.9	7.7
30°-40°	1261.0	8.4
40°-50°	1159.0	7.7
50°-60°	910.3	6.1
60°-70°	592.5	4.0
70°-80°	305.0	2.0
80°-90°	86.4	0.6
90°-100°	185.3	1.2
100°-110°	588.9	3.9
110°-120°	1007.8	6.7
120°-130°	1325.4	8.9
130°-140°	1487.7	9.9
140°-150°	1458.9	9.7
150°-160°	1223.8	8.2
160°-170°	811.6	5.4
170°-180°	283.7	1.9
0°-30°	2281.0	15.2
0°-40°	3542.0	23.7
0°-60°	5611.3	37.5
0°-90°	6595.2	44.1
90°-120°	1782.1	11.9
90°-150°	6054.2	40.4
90°-180°	8373.0	55.9
0°-180°	14968.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3203	3203	3203	3203	3203	
5°	3203	3188	3150	3176	3168	304
15°	3046	3014	2916	2861	2832	858
25°	2765	2672	2481	2362	2319	1272
35°	2383	2235	1980	1797	1733	1491
45°	1948	1753	1449	1243	1174	1504
55°	1481	1255	942	768	713	1323
65°	1000	765	504	406	397	991
75°	533	330	232	212	209	564
85°	124	64	55	55	55	143
90°	3	32	88	83	86	15
95°	132	157	162	162	157	147
105°	544	551	556	561	561	574
115°	1011	1026	1021	1019	1011	1000
125°	1471	1494	1486	1478	1476	1315
135°	1903	1931	1936	1933	1926	1471
145°	2310	2328	2342	2345	2335	1443
155°	2641	2648	2657	2669	2661	1216
165°	2873	2871	2871	2889	2876	811
175°	2990	2983	2977	2995	2980	284
180°	2995	2995	2995	2995	2995	

TEST NUMBER: P920190

CATALOG NUMBER: DFN2DIP-SQ3F0-090D110US935-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3202.7	3202.7	3202.7	3202.7	3202.7
2.5°	3217.1	3202.7	3170.6	3199.9	3194.0
5°	3202.7	3188.2	3150.4	3176.5	3167.9
7.5°	3176.5	3159.3	3118.7	3130.1	3115.6
10°	3141.8	3121.5	3063.7	3054.7	3037.5
12.5°	3098.4	3072.3	2993.9	2976.6	2944.6
15°	3046.1	3014.2	2915.8	2860.7	2831.8
17.5°	2985.3	2938.8	2817.0	2753.4	2707.0
20°	2915.8	2857.7	2712.7	2640.5	2576.5
22.5°	2840.4	2773.7	2605.5	2507.1	2463.7
25°	2765.1	2672.2	2481.0	2362.2	2318.6
27.5°	2675.3	2576.5	2365.0	2228.8	2162.1
30°	2579.6	2469.3	2237.4	2089.8	2011.4
32.5°	2486.7	2353.3	2115.9	1941.9	1869.3
35°	2382.6	2234.6	1979.7	1797.1	1733.1
37.5°	2281.0	2121.5	1852.1	1651.9	1579.7
40°	2173.8	2000.0	1718.6	1512.9	1437.6
42.5°	2063.6	1878.3	1585.4	1370.9	1298.6
45°	1947.7	1753.4	1449.2	1243.2	1173.7
47.5°	1837.6	1631.9	1318.9	1112.8	1049.2
50°	1715.9	1510.1	1191.3	991.1	930.5
52.5°	1596.9	1379.5	1069.5	878.2	823.2
55°	1480.9	1254.9	941.8	768.2	713.1
57.5°	1362.3	1130.4	829.1	666.7	620.3
60°	1240.4	1008.6	710.1	562.4	516.0
62.5°	1121.8	889.9	608.6	469.6	446.5
65°	1000.0	765.1	504.3	405.9	397.0
67.5°	884.1	649.1	405.9	356.4	347.8
70°	762.3	536.3	336.1	307.2	295.5
72.5°	646.4	431.7	281.0	258.0	252.2
75°	533.2	330.3	231.9	211.5	208.8
77.5°	420.3	234.6	182.6	171.0	165.1
80°	315.8	168.2	139.0	127.6	127.6
82.5°	220.2	113.1	95.7	89.8	89.8
85°	124.5	63.6	55.0	55.0	55.0
87.5°	46.4	23.1	23.1	20.3	20.3
90°	2.7	32.5	88.5	83.1	85.8
92.5°	56.0	75.9	78.5	81.3	81.3
95°	131.8	157.1	161.6	161.6	157.1
97.5°	219.5	242.9	252.9	252.9	252.9
100°	320.5	341.3	348.5	348.5	345.9
102.5°	427.1	442.5	452.5	455.1	452.5
105°	543.6	550.9	556.3	560.8	560.8
107.5°	659.2	670.0	670.0	671.8	659.2
110°	771.2	785.7	785.7	785.7	778.4

TEST NUMBER: P920190

CATALOG NUMBER: DFN2DIP-SQ3F0-090D110US935-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	892.2	907.5	904.8	897.6	892.2
115°	1011.4	1025.8	1021.3	1018.6	1011.4
117.5°	1129.7	1149.5	1136.9	1129.7	1122.5
120°	1248.9	1268.8	1248.9	1248.9	1240.8
122.5°	1357.3	1382.5	1369.8	1362.6	1357.3
125°	1471.0	1493.6	1486.3	1478.2	1475.5
127.5°	1582.1	1610.1	1600.2	1589.3	1582.1
130°	1685.9	1718.5	1713.9	1708.5	1698.6
132.5°	1802.4	1827.7	1829.5	1816.9	1809.6
135°	1902.6	1930.6	1936.0	1933.4	1926.1
137.5°	2014.6	2037.2	2041.7	2039.9	2029.1
140°	2113.1	2135.6	2148.3	2148.3	2138.4
142.5°	2214.2	2236.8	2244.0	2246.7	2236.8
145°	2309.9	2328.0	2342.4	2345.1	2335.2
147.5°	2395.7	2418.3	2429.1	2433.6	2423.7
150°	2484.2	2499.6	2509.5	2517.6	2509.5
152.5°	2562.8	2578.1	2590.7	2600.7	2590.7
155°	2641.4	2648.5	2656.7	2669.4	2661.2
157.5°	2709.0	2714.5	2718.9	2737.0	2724.4
160°	2769.6	2775.0	2777.7	2793.1	2782.2
162.5°	2825.5	2825.5	2828.3	2845.4	2832.8
165°	2873.4	2870.7	2870.7	2888.7	2876.1
167.5°	2916.7	2908.6	2908.6	2926.7	2914.0
170°	2949.3	2942.0	2939.4	2957.4	2942.0
172.5°	2971.8	2964.6	2961.9	2980.0	2964.6
175°	2989.9	2982.7	2977.2	2995.3	2980.0
177.5°	2999.8	2992.6	2987.1	3002.6	2987.1
180°	2995.3	2995.3	2995.3	2995.3	2995.3

TEST NUMBER: P920190

CATALOG NUMBER: DFN2DIP-SQ3F0-090D110US935-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.05	11.83	12.06	12.85	14.21	7.01	7.79	8.02	8.81	10.17
	3H	12.72	13.42	13.74	14.44	15.82	8.19	8.89	9.21	9.91	11.29
	4H	13.32	13.98	14.36	15.01	16.40	8.63	9.29	9.67	10.32	11.71
	6H	13.74	14.35	14.78	15.38	16.78	8.94	9.55	9.99	10.59	11.98
	8H	13.86	14.44	14.91	15.49	16.88	9.03	9.61	10.08	10.66	12.05
	12H	13.92	14.47	14.97	15.51	16.93	9.07	9.62	10.12	10.66	12.08
4H	2H	11.06	11.72	12.10	12.75	14.14	7.60	8.26	8.64	9.29	10.67
	3H	12.88	13.43	13.93	14.49	15.88	8.93	9.49	9.98	10.54	11.94
	4H	13.56	14.07	14.62	15.12	16.54	9.47	9.98	10.53	11.03	12.45
	6H	14.07	14.51	15.14	15.58	16.99	9.88	10.32	10.95	11.39	12.80
	8H	14.24	14.65	15.31	15.71	17.14	10.01	10.41	11.07	11.48	12.91
	12H	14.33	14.70	15.42	15.78	17.21	10.07	10.43	11.15	11.51	12.95
8H	4H	13.53	13.93	14.59	15.00	16.43	9.75	10.15	10.81	11.22	12.65
	6H	14.09	14.42	15.17	15.53	16.95	10.26	10.59	11.34	11.70	13.12
	8H	14.30	14.59	15.39	15.68	17.13	10.44	10.73	11.54	11.83	13.27
	12H	14.43	14.69	15.53	15.77	17.26	10.55	10.81	11.65	11.90	13.38
12H	4H	13.48	13.84	14.56	14.92	16.36	9.75	10.12	10.83	11.19	12.63
	6H	14.06	14.35	15.16	15.44	16.89	10.30	10.60	11.40	11.69	13.13
	8H	14.28	14.53	15.37	15.62	17.10	10.51	10.76	11.61	11.85	13.34