

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922938

Luminaire Tested: DFN2DIP-SQ3F0-100D070US940-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P922938
REPORT IS A COMBINATION OF REPORTS P899928 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-100D070US940-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13103.7 lumens
Efficiency: N/A
Efficacy: 86.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 151
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P922938

CATALOG NUMBER: DFN2DIP-SQ3F0-100D070US940-RLLFLL

Luminous Intensity Polar Plot

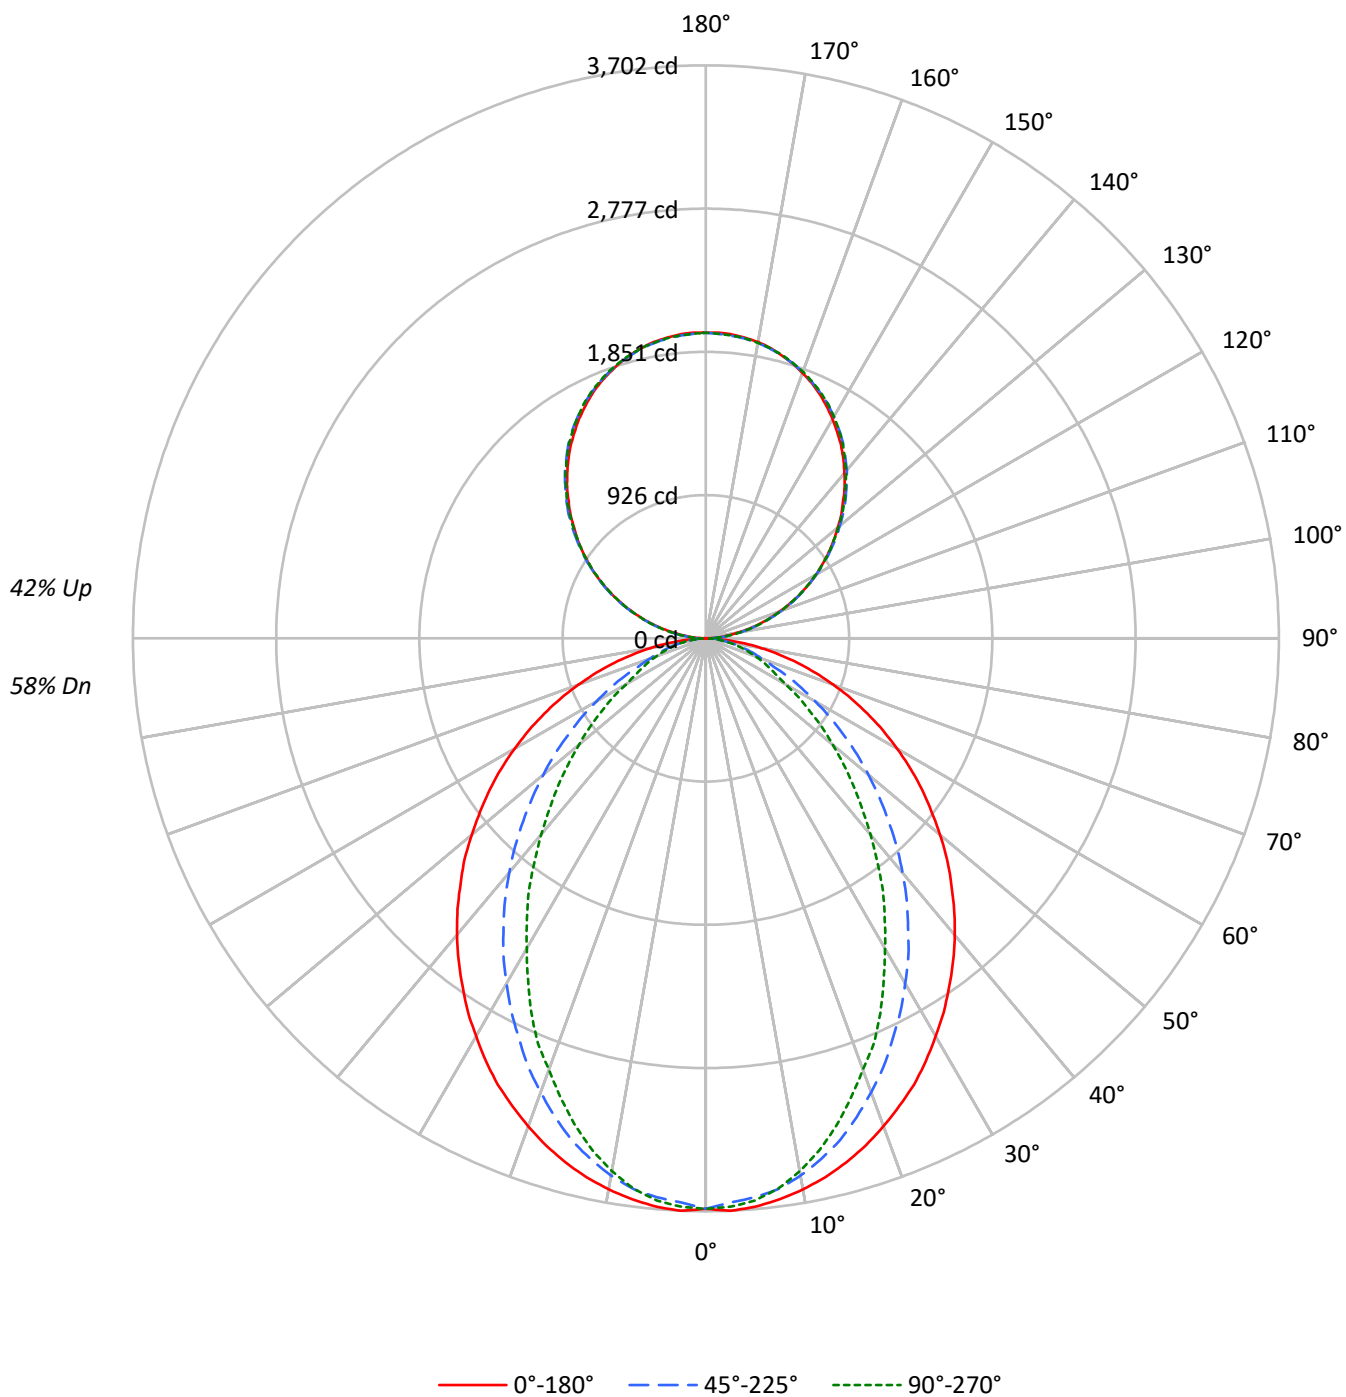

TEST NUMBER: P922938

CATALOG NUMBER: DFN2DIP-SQ3F0-100D070US940-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	63	63	63
1	100	96	92	89	93	90	86	83	78	75	73	67	65	64	57	56	55
2	92	84	79	74	85	79	74	69	69	65	62	59	57	54	51	49	47
3	84	75	68	62	78	70	64	59	61	56	52	53	49	46	45	43	41
4	77	67	59	53	72	62	56	50	55	49	45	48	44	40	41	38	35
5	71	60	52	46	66	56	49	44	49	44	39	43	39	35	37	34	31
6	66	54	46	40	61	51	43	38	45	39	35	39	35	31	34	31	28
7	61	49	41	35	57	46	39	34	41	35	31	36	31	28	31	28	25
8	57	44	37	32	53	42	35	30	37	32	28	33	28	25	29	25	23
9	53	41	33	28	49	39	32	27	34	29	25	30	26	23	27	23	20
10	49	38	30	26	46	36	29	25	32	26	23	28	24	21	25	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4223	4223	4223
5°	4227	4153	4181
10°	4182	4069	4044
15°	4122	3931	3832
20°	4043	3744	3573
25°	3962	3533	3323
30°	3855	3318	3006
35°	3749	3087	2727
40°	3642	2848	2408
45°	3517	2583	2120
50°	3388	2316	1837
55°	3253	2031	1566
60°	3096	1734	1288
65°	2916	1432	1157
70°	2697	1150	1046
75°	2422	1008	948
80°	2023	837	818
85°	1372	545	606

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3517 cd/sqm

TEST NUMBER: P922938

CATALOG NUMBER: DFN2DIP-SQ3F0-100D070US940-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	345.4	2.6
10°-20°	948.2	7.2
20°-30°	1331.2	10.2
30°-40°	1451.1	11.1
40°-50°	1333.8	10.2
50°-60°	1047.4	8.0
60°-70°	681.8	5.2
70°-80°	351.0	2.7
80°-90°	95.2	0.7
90°-100°	122.2	0.9
100°-110°	388.1	3.0
110°-120°	664.2	5.1
120°-130°	873.6	6.7
130°-140°	980.5	7.5
140°-150°	961.5	7.3
150°-160°	806.6	6.2
160°-170°	534.9	4.1
170°-180°	187.0	1.4
0°-30°	2624.8	20.0
0°-40°	4076.0	31.1
0°-60°	6457.2	49.3
0°-90°	7585.1	57.9
90°-120°	1174.5	9.0
90°-150°	3990.1	30.5
90°-180°	5519.0	42.1
0°-180°	13103.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3685	3685	3685	3685	3685	
5°	3685	3669	3625	3655	3645	349
15°	3505	3468	3355	3292	3259	988
25°	3182	3075	2855	2718	2668	1463
35°	2742	2572	2278	2068	1994	1716
45°	2241	2018	1668	1431	1351	1731
55°	1704	1444	1084	884	821	1523
65°	1151	880	580	467	457	1141
75°	614	380	267	243	240	649
85°	143	73	63	63	63	164
90°	2	21	58	55	56	13
95°	87	104	107	107	104	97
105°	358	363	367	370	370	378
115°	667	676	673	671	667	659
125°	970	984	980	974	972	866
135°	1254	1272	1276	1274	1269	969
145°	1522	1534	1544	1546	1539	951
155°	1741	1746	1751	1759	1754	801
165°	1894	1892	1892	1904	1896	534
175°	1970	1966	1962	1974	1964	187
180°	1974	1974	1974	1974	1974	

TEST NUMBER: P922938

CATALOG NUMBER: DFN2DIP-SQ3F0-100D070US940-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3685.4	3685.4	3685.4	3685.4	3685.4
2.5°	3702.0	3685.4	3648.6	3682.2	3675.5
5°	3685.4	3668.8	3625.2	3655.4	3645.4
7.5°	3655.4	3635.5	3588.8	3601.9	3585.3
10°	3615.4	3592.0	3525.5	3515.2	3495.4
12.5°	3565.5	3535.4	3445.1	3425.3	3388.5
15°	3505.3	3468.5	3355.2	3291.9	3258.7
17.5°	3435.2	3381.8	3241.7	3168.4	3115.0
20°	3355.2	3288.4	3121.7	3038.6	2964.9
22.5°	3268.6	3191.8	2998.2	2885.0	2835.1
25°	3181.9	3075.1	2854.9	2718.3	2668.1
27.5°	3078.5	2964.9	2721.5	2564.7	2488.0
30°	2968.5	2841.4	2574.6	2404.9	2314.6
32.5°	2861.7	2708.0	2434.9	2234.6	2151.1
35°	2741.7	2571.5	2278.1	2068.0	1994.3
37.5°	2624.9	2441.2	2131.3	1900.9	1817.8
40°	2501.4	2301.5	1977.7	1741.0	1654.3
42.5°	2374.7	2161.3	1824.5	1577.5	1494.3
45°	2241.3	2017.7	1667.8	1430.7	1350.7
47.5°	2114.7	1877.9	1517.7	1280.6	1207.4
50°	1974.5	1737.8	1370.8	1140.5	1070.8
52.5°	1837.5	1587.4	1230.7	1010.6	947.3
55°	1704.1	1444.1	1083.9	884.0	820.6
57.5°	1567.6	1300.7	954.0	767.1	713.7
60°	1427.4	1160.7	817.1	647.2	593.8
62.5°	1290.8	1024.0	700.3	540.4	513.8
65°	1150.8	880.4	580.3	467.1	456.8
67.5°	1017.4	747.0	467.1	410.1	400.2
70°	877.2	617.2	386.7	353.5	340.1
72.5°	743.8	496.8	323.4	296.9	290.2
75°	613.6	380.0	266.8	243.4	240.2
77.5°	483.8	270.0	210.2	196.7	190.0
80°	363.4	193.6	160.0	146.9	146.9
82.5°	253.3	130.2	110.0	103.3	103.3
85°	143.3	73.2	63.3	63.3	63.3
87.5°	53.4	26.6	26.6	23.4	23.4
90°	1.8	21.4	58.3	54.8	56.5
92.5°	36.9	50.0	51.8	53.6	53.6
95°	86.9	103.5	106.6	106.6	103.5
97.5°	144.6	160.1	166.7	166.7	166.7
100°	211.2	225.0	229.7	229.7	227.9
102.5°	281.5	291.6	298.2	300.0	298.2
105°	358.3	363.0	366.6	369.6	369.6
107.5°	434.4	441.6	441.6	442.8	434.4
110°	508.3	517.8	517.8	517.8	513.0

TEST NUMBER: P922938

CATALOG NUMBER: DFN2DIP-SQ3F0-100D070US940-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	588.0	598.2	596.4	591.6	588.0
115°	666.6	676.1	673.2	671.4	666.6
117.5°	744.5	757.6	749.3	744.5	739.8
120°	823.0	836.2	823.0	823.0	817.7
122.5°	894.5	911.1	902.9	898.0	894.5
125°	969.5	984.4	979.6	974.3	972.5
127.5°	1042.7	1061.1	1054.6	1047.5	1042.7
130°	1111.2	1132.6	1129.6	1126.1	1119.5
132.5°	1187.9	1204.6	1205.8	1197.5	1192.7
135°	1254.0	1272.4	1276.0	1274.2	1269.4
137.5°	1327.8	1342.6	1345.6	1344.4	1337.3
140°	1392.7	1407.6	1415.9	1415.9	1409.3
142.5°	1459.3	1474.2	1478.9	1480.7	1474.2
145°	1522.4	1534.3	1543.8	1545.6	1539.1
147.5°	1579.0	1593.8	1601.0	1603.9	1597.4
150°	1637.3	1647.3	1653.9	1659.3	1653.9
152.5°	1689.0	1699.2	1707.4	1714.0	1707.4
155°	1740.8	1745.5	1751.0	1759.3	1753.9
157.5°	1785.5	1789.0	1792.0	1803.9	1795.5
160°	1825.3	1828.9	1830.7	1840.8	1833.6
162.5°	1862.2	1862.2	1864.0	1875.3	1867.0
165°	1893.7	1891.9	1891.9	1903.9	1895.5
167.5°	1922.3	1917.0	1917.0	1928.9	1920.6
170°	1943.8	1939.0	1937.2	1949.1	1939.0
172.5°	1958.6	1953.8	1952.0	1964.0	1953.8
175°	1970.5	1965.8	1962.2	1974.1	1964.0
177.5°	1977.1	1972.3	1968.7	1978.9	1968.7
180°	1974.1	1974.1	1974.1	1974.1	1974.1

TEST NUMBER: P922938

CATALOG NUMBER: DFN2DIP-SQ3F0-100D070US940-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.82	13.72	13.72	14.63	15.79	8.78	9.68	9.68	10.59	11.75
	3H	14.50	15.31	15.41	16.22	17.41	9.97	10.77	10.88	11.69	12.87
	4H	15.11	15.87	16.03	16.79	17.98	10.42	11.18	11.34	12.10	13.29
	6H	15.53	16.23	16.46	17.16	18.36	10.74	11.44	11.67	12.37	13.57
	8H	15.66	16.32	16.60	17.27	18.47	10.83	11.49	11.77	12.44	13.64
	12H	15.72	16.35	16.66	17.29	18.52	10.87	11.50	11.82	12.44	13.67
4H	2H	12.85	13.61	13.77	14.53	15.72	9.38	10.14	10.31	11.07	12.26
	3H	14.68	15.31	15.61	16.26	17.47	10.73	11.36	11.67	12.32	13.52
	4H	15.37	15.94	16.32	16.89	18.12	11.28	11.85	12.23	12.80	14.03
	6H	15.88	16.38	16.84	17.35	18.58	11.69	12.19	12.65	13.16	14.39
	8H	16.06	16.52	17.02	17.49	18.73	11.82	12.28	12.78	13.25	14.49
	12H	16.15	16.57	17.13	17.55	18.80	11.89	12.30	12.87	13.29	14.54
8H	4H	15.34	15.80	16.30	16.77	18.01	11.56	12.02	12.52	12.99	14.23
	6H	15.90	16.28	16.89	17.29	18.54	12.07	12.45	13.06	13.46	14.71
	8H	16.12	16.45	17.11	17.45	18.71	12.26	12.60	13.26	13.59	14.86
	12H	16.25	16.55	17.25	17.54	18.85	12.38	12.67	13.37	13.66	14.97
12H	4H	15.29	15.71	16.27	16.69	17.94	11.57	11.98	12.55	12.97	14.22
	6H	15.88	16.22	16.87	17.21	18.47	12.12	12.46	13.12	13.46	14.72
	8H	16.10	16.39	17.10	17.38	18.69	12.33	12.63	13.33	13.62	14.93