

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922970

Luminaire Tested: DFN2DIP-SQ3F0-110D060US940-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P922970
REPORT IS A COMBINATION OF REPORTS P899912 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-110D060US940-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13072.5 lumens
Efficiency: N/A
Efficacy: 83.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 157
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P922970

CATALOG NUMBER: DFN2DIP-SQ3F0-110D060US940-RLLFLL

Luminous Intensity Polar Plot

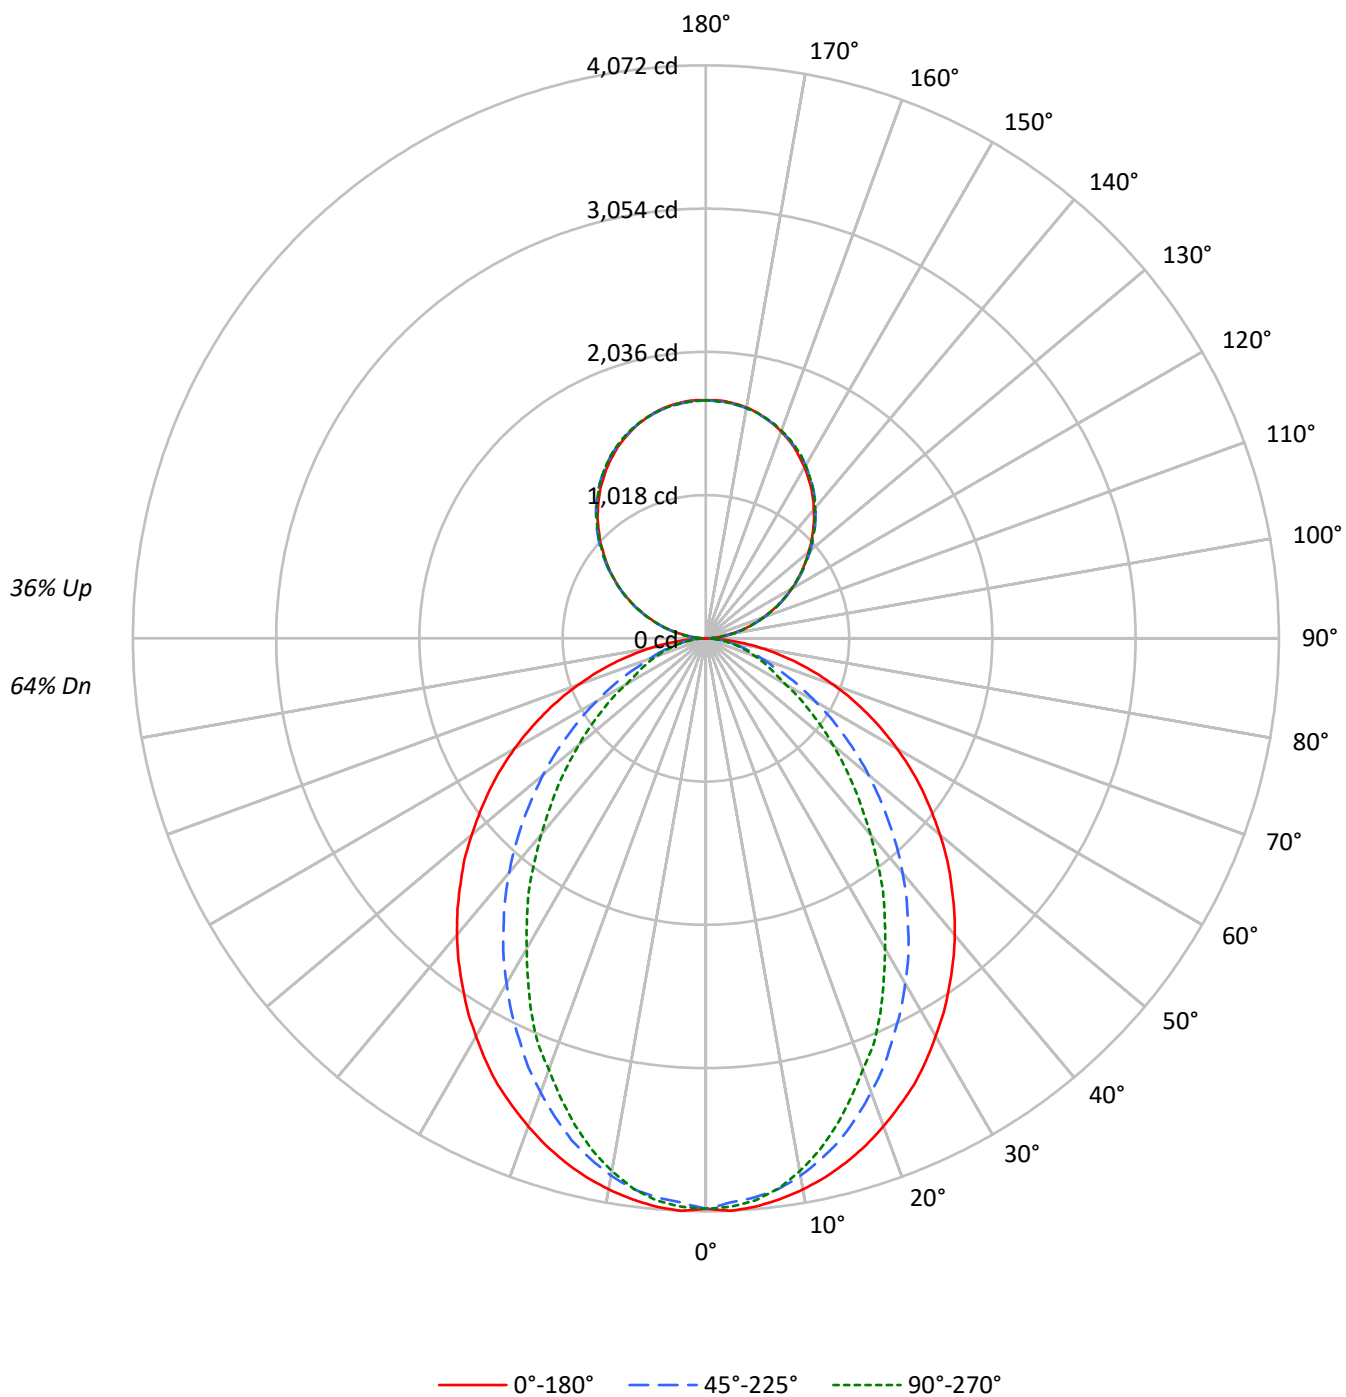

TEST NUMBER: P922970

CATALOG NUMBER: DFN2DIP-SQ3F0-110D060US940-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	104	104	104	104	91	91	91	79	79	79	69	69	69
1	101	97	94	90	95	92	88	85	81	78	76	71	69	67	62	61	59
2	93	86	80	75	87	81	76	71	72	68	64	63	60	57	55	53	51
3	85	76	69	63	80	72	65	60	64	59	55	56	52	49	49	47	44
4	78	68	60	54	73	64	57	52	57	52	47	51	46	43	45	41	39
5	72	61	53	47	68	58	50	45	51	46	41	46	41	38	40	37	34
6	67	55	47	41	63	52	45	39	47	41	36	42	37	33	37	33	30
7	62	50	42	36	58	47	40	35	43	37	32	38	33	30	34	30	27
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	27	25
9	54	42	34	29	51	40	33	28	36	30	26	32	28	24	29	25	22
10	50	38	31	26	48	37	30	26	33	28	24	30	25	22	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4645	4645	4645
5°	4650	4568	4599
10°	4601	4476	4448
15°	4534	4325	4215
20°	4448	4118	3930
25°	4359	3887	3655
30°	4240	3650	3306
35°	4124	3396	3000
40°	4006	3133	2649
45°	3869	2842	2332
50°	3727	2548	2021
55°	3578	2234	1723
60°	3406	1907	1417
65°	3207	1575	1273
70°	2967	1265	1150
75°	2663	1108	1043
80°	2226	920	900
85°	1510	599	666

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3869 cd/sqm

TEST NUMBER: P922970

CATALOG NUMBER: DFN2DIP-SQ3F0-110D060US940-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	379.9	2.9
10°-20°	1043.0	8.0
20°-30°	1464.4	11.2
30°-40°	1596.2	12.2
40°-50°	1467.1	11.2
50°-60°	1152.2	8.8
60°-70°	750.0	5.7
70°-80°	386.0	3.0
80°-90°	103.4	0.8
90°-100°	104.7	0.8
100°-110°	332.7	2.5
110°-120°	569.3	4.4
120°-130°	748.8	5.7
130°-140°	840.5	6.4
140°-150°	824.2	6.3
150°-160°	691.4	5.3
160°-170°	458.5	3.5
170°-180°	160.3	1.2
0°-30°	2887.3	22.1
0°-40°	4483.6	34.3
0°-60°	7102.9	54.3
0°-90°	8342.3	63.8
90°-120°	1006.7	7.7
90°-150°	3420.1	26.2
90°-180°	4730.0	36.2
0°-180°	13072.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4054	4054	4054	4054	4054	
5°	4054	4036	3988	4021	4010	384
15°	3856	3815	3691	3621	3584	1087
25°	3500	3382	3140	2990	2935	1610
35°	3016	2829	2506	2275	2194	1888
45°	2466	2220	1834	1574	1486	1904
55°	1875	1588	1192	972	903	1675
65°	1266	968	638	514	502	1255
75°	675	418	294	268	264	714
85°	158	81	70	70	70	181
90°	2	18	50	47	48	13
95°	74	89	91	91	89	83
105°	307	311	314	317	317	324
115°	571	580	577	575	571	565
125°	831	844	840	835	834	743
135°	1075	1091	1094	1092	1088	831
145°	1305	1315	1323	1325	1319	815
155°	1492	1496	1501	1508	1503	687
165°	1623	1622	1622	1632	1625	458
175°	1689	1685	1682	1692	1683	160
180°	1692	1692	1692	1692	1692	

TEST NUMBER: P922970

CATALOG NUMBER: DFN2DIP-SQ3F0-110D060US940-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4054.0	4054.0	4054.0	4054.0	4054.0
2.5°	4072.3	4054.0	4013.5	4050.5	4043.1
5°	4054.0	4035.7	3987.8	4020.9	4010.0
7.5°	4020.9	3999.1	3947.7	3962.1	3943.8
10°	3976.9	3951.2	3878.0	3866.7	3845.0
12.5°	3922.0	3888.9	3789.7	3767.8	3727.3
15°	3855.8	3815.4	3690.8	3621.1	3584.5
17.5°	3778.8	3720.0	3565.9	3485.2	3426.5
20°	3690.8	3617.2	3433.9	3342.4	3261.4
22.5°	3595.5	3510.9	3298.1	3173.5	3118.6
25°	3500.1	3382.5	3140.4	2990.2	2934.9
27.5°	3386.4	3261.4	2993.7	2821.2	2736.7
30°	3265.4	3125.6	2832.2	2645.3	2546.0
32.5°	3147.8	2978.8	2678.3	2458.1	2366.2
35°	3015.9	2828.6	2506.0	2274.8	2193.8
37.5°	2887.4	2685.4	2344.4	2091.0	1999.6
40°	2751.6	2531.7	2175.5	1915.0	1819.7
42.5°	2612.2	2377.5	2007.0	1735.3	1643.8
45°	2465.5	2219.5	1834.5	1573.7	1485.8
47.5°	2326.1	2065.7	1669.5	1408.6	1328.1
50°	2171.9	1911.6	1508.0	1254.5	1177.9
52.5°	2021.3	1746.1	1353.8	1111.7	1042.0
55°	1874.6	1588.5	1192.2	972.3	902.7
57.5°	1724.4	1430.8	1049.4	843.9	785.1
60°	1570.2	1276.8	898.8	711.9	653.2
62.5°	1420.0	1126.5	770.3	594.4	565.2
65°	1265.8	968.4	638.4	513.8	502.5
67.5°	1119.1	821.7	513.8	451.1	440.2
70°	964.9	678.9	425.4	388.9	374.1
72.5°	818.1	546.5	355.8	326.5	319.1
75°	674.9	418.0	293.5	267.8	264.3
77.5°	532.1	297.0	231.2	216.4	209.0
80°	399.8	212.9	175.9	161.6	161.6
82.5°	278.7	143.2	121.1	113.7	113.7
85°	157.7	80.6	69.6	69.6	69.6
87.5°	58.8	29.2	29.2	25.7	25.7
90°	1.5	18.4	50.0	46.9	48.4
92.5°	31.7	42.9	44.4	45.9	45.9
95°	74.5	88.7	91.3	91.3	88.7
97.5°	123.9	137.2	142.9	142.9	142.9
100°	181.1	192.8	196.9	196.9	195.4
102.5°	241.3	249.9	255.6	257.1	255.6
105°	307.1	311.2	314.2	316.8	316.8
107.5°	372.4	378.5	378.5	379.5	372.4
110°	435.7	443.8	443.8	443.8	439.7

TEST NUMBER: P922970

CATALOG NUMBER: DFN2DIP-SQ3F0-110D060US940-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	504.0	512.6	511.1	507.0	504.0
115°	571.3	579.5	576.9	575.4	571.3
117.5°	638.2	649.4	642.2	638.2	634.1
120°	705.5	716.8	705.5	705.5	700.9
122.5°	766.7	781.0	773.8	769.8	766.7
125°	831.0	843.7	839.6	835.1	833.6
127.5°	893.8	909.5	903.9	897.9	893.8
130°	952.4	970.8	968.2	965.2	959.6
132.5°	1018.2	1032.5	1033.5	1026.4	1022.3
135°	1074.9	1090.7	1093.7	1092.2	1088.1
137.5°	1138.1	1150.8	1153.4	1152.4	1146.3
140°	1193.7	1206.5	1213.6	1213.6	1208.0
142.5°	1250.8	1263.6	1267.7	1269.2	1263.6
145°	1304.9	1315.1	1323.3	1324.8	1319.2
147.5°	1353.3	1366.1	1372.3	1374.7	1369.1
150°	1403.4	1412.0	1417.6	1422.2	1417.6
152.5°	1447.7	1456.4	1463.6	1469.2	1463.6
155°	1492.1	1496.2	1500.7	1508.0	1503.3
157.5°	1530.4	1533.5	1536.0	1546.2	1539.1
160°	1564.6	1567.6	1569.1	1577.8	1571.7
162.5°	1596.2	1596.2	1597.7	1607.4	1600.3
165°	1623.2	1621.7	1621.7	1631.9	1624.8
167.5°	1647.7	1643.2	1643.2	1653.3	1646.2
170°	1666.1	1662.0	1660.5	1670.6	1662.0
172.5°	1678.8	1674.7	1673.2	1683.4	1674.7
175°	1689.0	1685.0	1681.9	1692.1	1683.4
177.5°	1694.6	1690.6	1687.5	1696.1	1687.5
180°	1692.1	1692.1	1692.1	1692.1	1692.1

TEST NUMBER: P922970

CATALOG NUMBER: DFN2DIP-SQ3F0-110D060US940-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.65	14.61	14.49	15.46	16.52	9.61	10.57	10.45	11.42	12.48
	3H	15.33	16.19	16.18	17.05	18.14	10.80	11.66	11.65	12.52	13.61
	4H	15.94	16.75	16.81	17.62	18.72	11.25	12.06	12.12	12.93	14.03
	6H	16.37	17.11	17.24	17.99	19.10	11.57	12.32	12.45	13.20	14.31
	8H	16.50	17.20	17.38	18.10	19.21	11.67	12.37	12.55	13.27	14.38
	12H	16.56	17.23	17.45	18.12	19.26	11.71	12.38	12.60	13.27	14.41
4H	2H	13.68	14.49	14.55	15.36	16.46	10.22	11.03	11.09	11.90	13.00
	3H	15.52	16.19	16.40	17.09	18.20	11.57	12.24	12.45	13.15	14.26
	4H	16.21	16.82	17.10	17.72	18.86	12.12	12.73	13.01	13.63	14.77
	6H	16.73	17.25	17.63	18.18	19.32	12.54	13.07	13.45	13.99	15.13
	8H	16.90	17.39	17.81	18.31	19.47	12.67	13.16	13.58	14.07	15.23
	12H	17.00	17.44	17.93	18.38	19.54	12.73	13.18	13.66	14.11	15.27
8H	4H	16.19	16.68	17.10	17.59	18.75	12.41	12.90	13.32	13.81	14.97
	6H	16.75	17.16	17.69	18.11	19.27	12.92	13.33	13.86	14.29	15.44
	8H	16.96	17.32	17.91	18.27	19.45	13.11	13.47	14.05	14.42	15.59
	12H	17.10	17.42	18.05	18.36	19.59	13.23	13.54	14.18	14.49	15.71
12H	4H	16.14	16.58	17.07	17.52	18.68	12.42	12.86	13.35	13.79	14.96
	6H	16.73	17.08	17.67	18.04	19.21	12.97	13.33	13.92	14.28	15.45
	8H	16.95	17.26	17.90	18.21	19.43	13.18	13.50	14.13	14.44	15.66

END OF REPORT