

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922996

Luminaire Tested: DFN2DIP-SQ3F0-120D040US940-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P922996
REPORT IS A COMBINATION OF REPORTS P899877 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-120D040US940-FLLFLL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13750.2 lumens
Efficiency: N/A
Efficacy: 88.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 156.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9957
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P922996

CATALOG NUMBER: DFN2DIP-SQ3F0-120D040US940-FLLFLL

Luminous Intensity Polar Plot

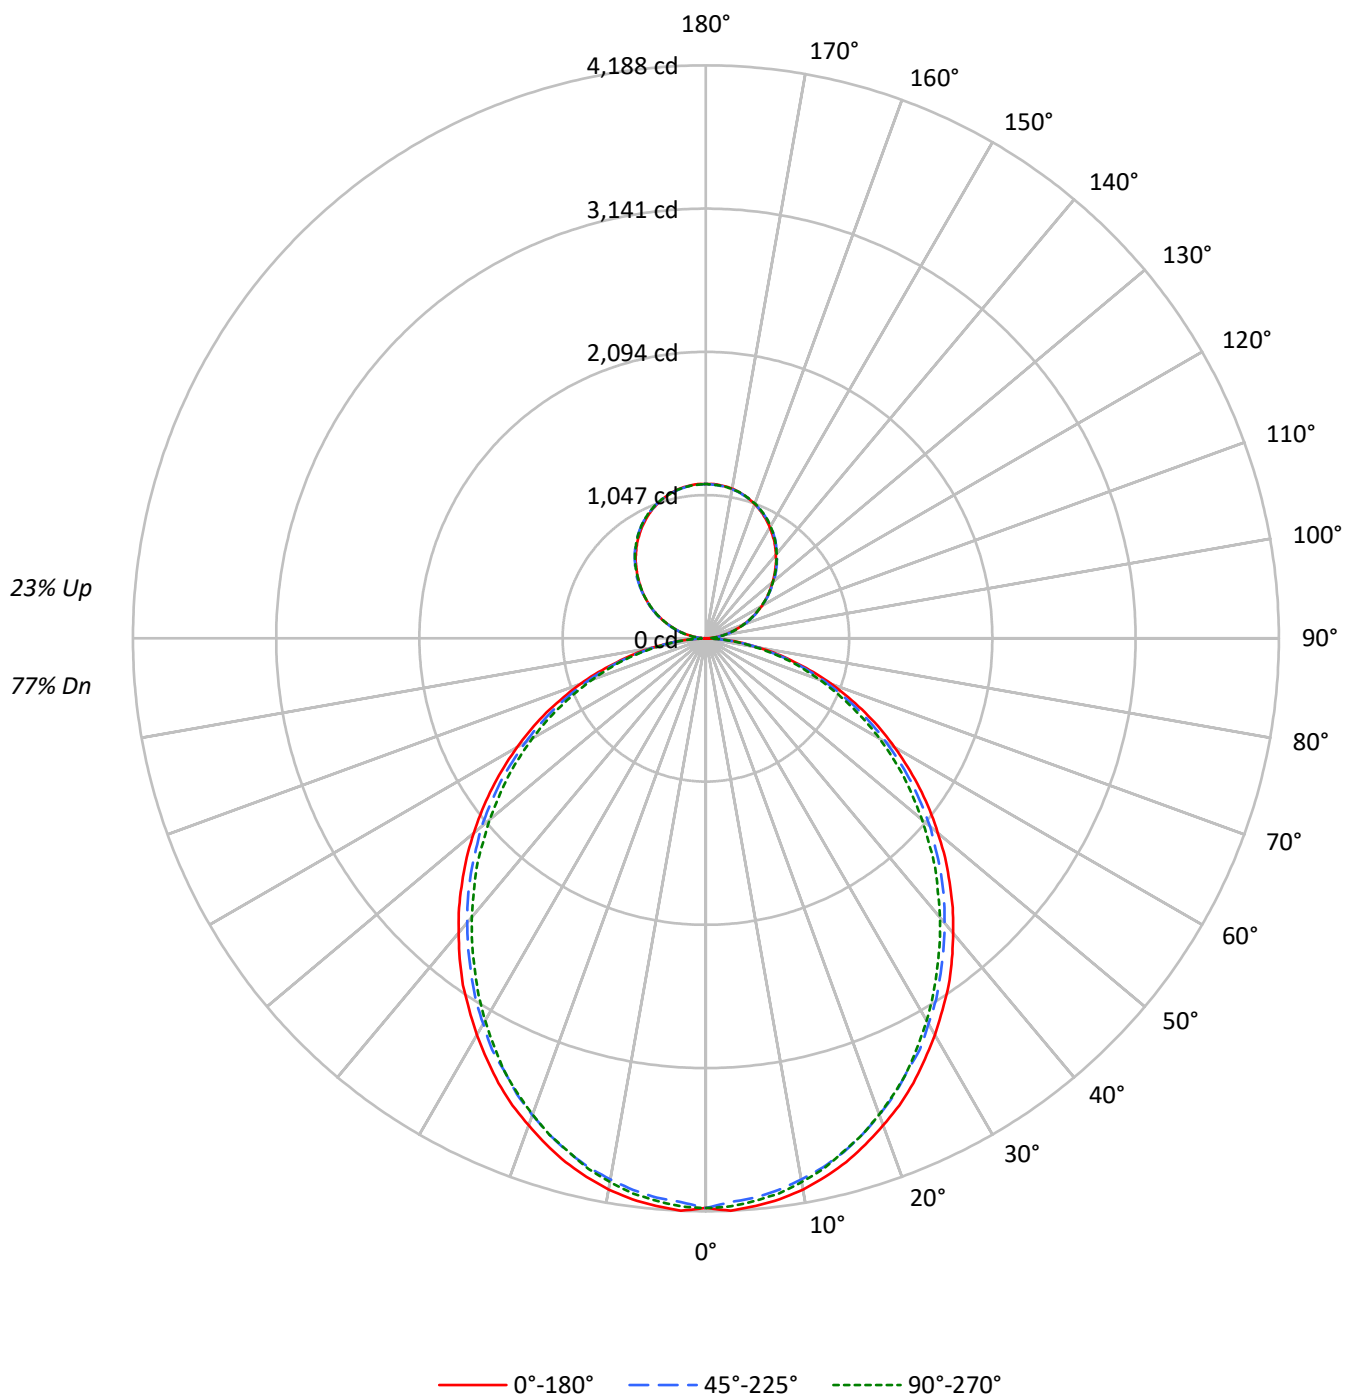

TEST NUMBER: P922996

CATALOG NUMBER: DFN2DIP-SQ3F0-120D040US940-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	114	114	114	114	108	108	108	108	98	98	98	89	89	89	81	81	81
1	104	99	95	92	99	95	91	88	86	84	81	79	77	75	72	70	68
2	95	87	80	75	90	83	77	72	76	71	67	69	66	62	63	60	58
3	86	76	69	63	82	73	66	61	67	61	57	61	57	53	56	52	49
4	79	68	59	53	75	65	57	52	60	53	48	55	50	45	50	46	42
5	73	61	52	46	69	58	50	44	53	47	42	49	44	39	45	41	37
6	67	55	46	40	64	52	45	39	48	42	37	45	39	35	41	36	33
7	62	49	41	35	59	48	40	34	44	37	33	41	35	31	37	33	29
8	58	45	37	31	55	43	36	31	40	34	29	37	32	28	34	30	26
9	54	41	33	28	52	40	32	27	37	31	26	34	29	25	32	27	24
10	51	38	30	25	48	37	30	25	34	28	24	32	26	23	30	25	22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4771	4771	4771
5°	4775	4701	4734
10°	4734	4635	4669
15°	4661	4555	4567
20°	4564	4446	4463
25°	4467	4316	4343
30°	4347	4195	4191
35°	4232	4052	4030
40°	4092	3909	3876
45°	3952	3764	3719
50°	3799	3612	3538
55°	3638	3437	3370
60°	3456	3229	3178
65°	3257	3013	2953
70°	3004	2749	2709
75°	2654	2433	2481
80°	2231	2031	2051
85°	1570	1345	1343

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3952 cd/sqm

TEST NUMBER: P922996

CATALOG NUMBER: DFN2DIP-SQ3F0-120D040US940-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	391.9	2.9
10°-20°	1102.6	8.0
20°-30°	1620.4	11.8
30°-40°	1882.0	13.7
40°-50°	1879.7	13.7
50°-60°	1639.0	11.9
60°-70°	1211.6	8.8
70°-80°	685.5	5.0
80°-90°	184.1	1.3
90°-100°	69.8	0.5
100°-110°	221.8	1.6
110°-120°	379.5	2.8
120°-130°	499.2	3.6
130°-140°	560.3	4.1
140°-150°	549.4	4.0
150°-160°	460.9	3.4
160°-170°	305.7	2.2
170°-180°	106.8	0.8
0°-30°	3114.9	22.7
0°-40°	4996.9	36.3
0°-60°	8515.5	61.9
0°-90°	10596.7	77.1
90°-120°	671.2	4.9
90°-150°	2280.1	16.6
90°-180°	3153.0	22.9
0°-180°	13750.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4164	4164	4164	4164	4164	
5°	4164	4148	4104	4136	4128	395
15°	3964	3940	3888	3904	3884	1116
25°	3587	3555	3487	3495	3487	1651
35°	3095	3055	2991	2967	2947	1933
45°	2518	2490	2430	2386	2370	1944
55°	1906	1882	1834	1786	1766	1704
65°	1285	1261	1221	1185	1165	1271
75°	672	665	644	621	629	718
85°	164	160	156	144	140	183
90°	1	12	33	31	32	13
95°	50	59	61	61	59	55
105°	205	207	210	211	211	216
115°	381	386	385	384	381	377
125°	554	562	560	557	556	495
135°	717	727	729	728	725	554
145°	870	877	882	883	880	544
155°	995	998	1000	1005	1002	458
165°	1082	1081	1081	1088	1083	305
175°	1126	1123	1121	1128	1122	107
180°	1128	1128	1128	1128	1128	

TEST NUMBER: P922996

CATALOG NUMBER: DFN2DIP-SQ3F0-120D040US940-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4163.7	4163.7	4163.7	4163.7	4163.7
2.5°	4187.8	4167.9	4123.7	4163.7	4156.0
5°	4163.7	4147.9	4103.7	4135.6	4127.9
7.5°	4135.6	4111.8	4067.6	4099.9	4091.9
10°	4091.9	4063.8	4015.8	4047.7	4035.8
12.5°	4031.5	4007.7	3959.7	3979.7	3971.6
15°	3963.6	3939.8	3887.5	3903.6	3883.7
17.5°	3879.5	3855.7	3803.4	3823.4	3803.4
20°	3787.3	3763.5	3707.5	3719.3	3703.6
22.5°	3695.5	3659.4	3607.1	3607.1	3599.1
25°	3587.2	3555.3	3487.4	3495.1	3487.4
27.5°	3467.0	3439.0	3387.2	3375.2	3355.3
30°	3347.2	3314.9	3255.0	3243.2	3227.0
32.5°	3218.9	3195.2	3131.0	3106.8	3090.7
35°	3094.9	3055.0	2990.8	2966.6	2946.7
37.5°	2954.7	2918.7	2854.5	2826.5	2806.5
40°	2810.8	2778.5	2714.3	2678.6	2662.5
42.5°	2670.6	2638.3	2574.5	2534.2	2510.4
45°	2518.5	2490.5	2430.1	2386.4	2370.3
47.5°	2370.3	2342.2	2278.1	2233.9	2210.1
50°	2213.9	2194.0	2137.9	2081.8	2061.8
52.5°	2061.8	2033.8	1982.0	1937.8	1909.8
55°	1905.9	1881.8	1833.7	1785.7	1765.8
57.5°	1749.6	1729.7	1677.4	1629.4	1613.3
60°	1593.3	1577.6	1521.5	1477.4	1465.4
62.5°	1441.3	1413.2	1373.3	1333.4	1317.2
65°	1285.4	1261.1	1221.2	1185.1	1165.2
67.5°	1125.2	1104.8	1069.2	1041.2	1025.0
70°	977.0	960.8	924.7	896.7	881.0
72.5°	824.9	808.8	788.8	760.8	748.9
75°	672.4	664.8	644.3	620.6	628.7
77.5°	536.5	520.3	512.3	500.3	488.5
80°	400.6	396.3	388.3	376.4	368.3
82.5°	272.2	272.2	268.5	252.4	252.4
85°	164.0	160.2	156.3	144.0	140.2
87.5°	72.2	64.1	56.1	44.1	39.9
90°	1.0	12.2	33.3	31.3	32.3
92.5°	21.0	28.5	29.6	30.6	30.6
95°	49.7	59.2	60.9	60.9	59.2
97.5°	82.7	91.5	95.2	95.2	95.2
100°	120.7	128.6	131.3	131.3	130.3
102.5°	160.9	166.7	170.4	171.4	170.4
105°	204.7	207.4	209.5	211.2	211.2
107.5°	248.3	252.4	252.4	253.0	248.3
110°	290.4	295.9	295.9	295.9	293.2

TEST NUMBER: P922996

CATALOG NUMBER: DFN2DIP-SQ3F0-120D040US940-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	336.0	341.8	340.7	338.0	336.0
115°	380.8	386.4	384.6	383.6	380.8
117.5°	425.4	432.9	428.2	425.4	422.8
120°	470.4	477.8	470.4	470.4	467.3
122.5°	511.1	520.7	515.9	513.2	511.1
125°	554.0	562.5	559.8	556.7	555.7
127.5°	595.8	606.4	602.6	598.5	595.8
130°	634.9	647.2	645.5	643.5	639.7
132.5°	678.8	688.3	689.0	684.2	681.5
135°	716.6	727.1	729.2	728.1	725.4
137.5°	758.8	767.2	768.9	768.2	764.2
140°	795.8	804.3	809.0	809.0	805.3
142.5°	833.9	842.4	845.1	846.1	842.4
145°	870.0	876.7	882.2	883.2	879.5
147.5°	902.2	910.7	914.8	916.5	912.8
150°	935.6	941.4	945.1	948.2	945.1
152.5°	965.2	970.9	975.7	979.5	975.7
155°	994.7	997.5	1000.5	1005.3	1002.2
157.5°	1020.3	1022.3	1024.0	1030.8	1026.0
160°	1043.0	1045.1	1046.1	1051.9	1047.8
162.5°	1064.1	1064.1	1065.1	1071.6	1066.8
165°	1082.2	1081.1	1081.1	1087.9	1083.2
167.5°	1098.5	1095.4	1095.4	1102.2	1097.4
170°	1110.7	1108.0	1107.0	1113.7	1108.0
172.5°	1119.2	1116.5	1115.4	1122.3	1116.5
175°	1126.1	1123.3	1121.2	1128.0	1122.3
177.5°	1129.8	1127.0	1125.0	1130.8	1125.0
180°	1128.0	1128.0	1128.0	1128.0	1128.0

TEST NUMBER: P922996

CATALOG NUMBER: DFN2DIP-SQ3F0-120D040US940-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.86	16.04	15.55	16.74	17.56	14.42	15.59	15.10	16.29	17.12
	3H	16.54	17.60	17.24	18.31	19.17	16.05	17.11	16.75	17.82	18.68
	4H	17.14	18.14	17.86	18.86	19.73	16.65	17.64	17.36	18.36	19.23
	6H	17.55	18.47	18.28	19.20	20.09	17.05	17.97	17.78	18.70	19.59
	8H	17.67	18.54	18.41	19.29	20.18	17.16	18.04	17.90	18.79	19.68
	12H	17.72	18.56	18.47	19.30	20.22	17.21	18.05	17.96	18.79	19.71
4H	2H	15.36	16.35	16.08	17.08	17.94	15.00	16.00	15.72	16.72	17.59
	3H	17.25	18.08	17.98	18.84	19.72	16.84	17.67	17.57	18.43	19.32
	4H	17.97	18.72	18.72	19.48	20.40	17.55	18.30	18.29	19.06	19.98
	6H	18.50	19.15	19.26	19.94	20.86	18.06	18.72	18.83	19.51	20.43
	8H	18.65	19.26	19.42	20.05	20.98	18.21	18.83	18.99	19.61	20.55
	12H	18.74	19.29	19.53	20.09	21.03	18.29	18.84	19.08	19.64	20.59
8H	4H	18.19	18.80	18.96	19.58	20.52	17.81	18.42	18.58	19.20	20.14
	6H	18.82	19.33	19.62	20.16	21.09	18.44	18.95	19.24	19.77	20.71
	8H	19.04	19.50	19.86	20.32	21.27	18.65	19.10	19.46	19.93	20.88
	12H	19.19	19.59	20.00	20.40	21.41	18.78	19.17	19.59	19.99	21.00
12H	4H	18.19	18.74	18.98	19.54	20.48	17.82	18.37	18.61	19.17	20.11
	6H	18.85	19.31	19.67	20.13	21.08	18.48	18.93	19.29	19.76	20.71
	8H	19.11	19.51	19.92	20.32	21.33	18.73	19.13	19.54	19.94	20.95