

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922999

Luminaire Tested: DFN2DIP-SQ3F0-120D040US940-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P922999
REPORT IS A COMBINATION OF REPORTS P901398 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-120D040US940-RLLONL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12626.6 lumens
Efficiency: N/A
Efficacy: 80.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 156.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9957
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P922999

CATALOG NUMBER: DFN2DIP-SQ3F0-120D040US940-RLONL

Luminous Intensity Polar Plot

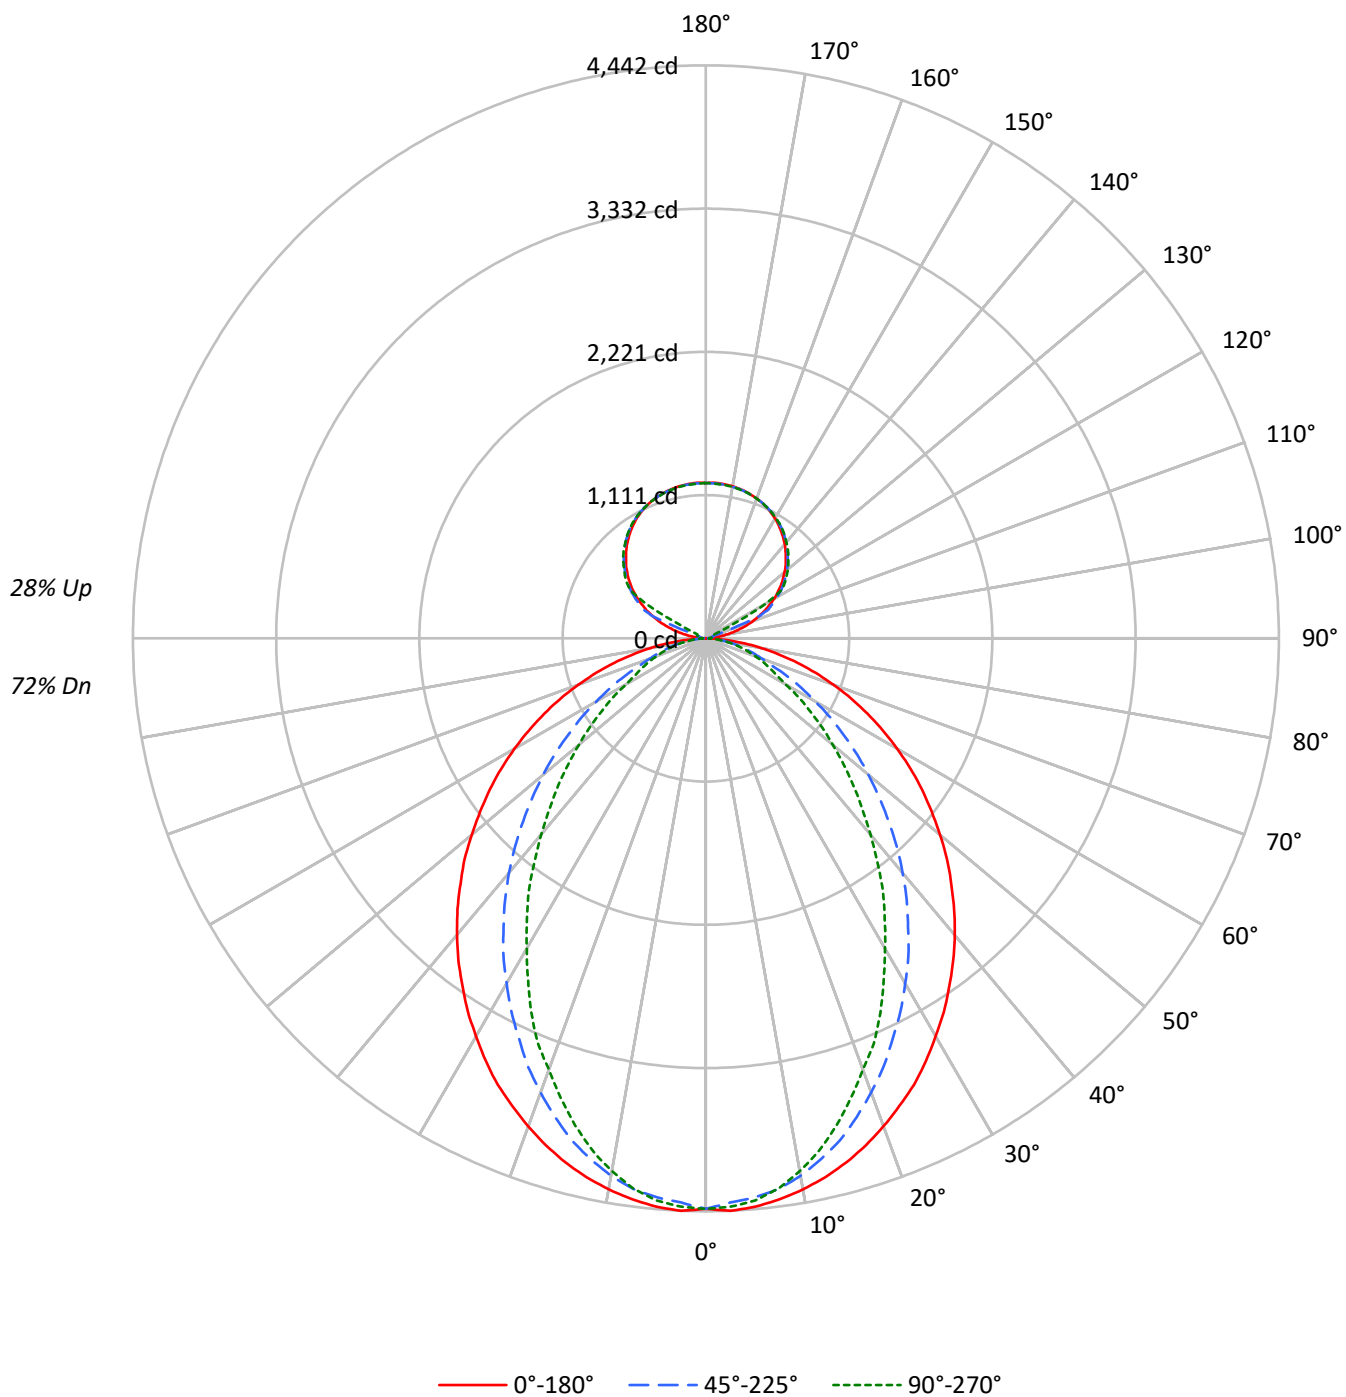

TEST NUMBER: P922999

CATALOG NUMBER: DFN2DIP-SQ3F0-120D040US940-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	76	76	76
1	103	99	95	92	98	94	91	88	85	82	80	76	75	73	69	67	66
2	95	87	81	76	90	83	78	73	75	71	68	68	65	62	61	59	57
3	87	78	70	65	82	74	67	62	67	62	58	61	57	53	55	52	49
4	80	69	61	55	76	66	59	54	60	54	50	55	50	46	50	46	43
5	74	62	54	48	70	59	52	47	54	48	44	50	45	41	45	41	38
6	68	56	48	42	65	54	46	41	49	43	39	45	40	36	41	37	34
7	63	51	43	38	60	49	42	36	45	39	34	41	36	32	38	34	30
8	59	47	39	34	56	45	38	33	41	35	31	38	33	29	35	31	27
9	55	43	35	30	52	41	34	30	38	32	28	35	30	26	32	28	25
10	52	40	32	28	49	38	31	27	35	29	25	33	28	24	30	26	23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5067	5067	5067
5°	5072	4984	5017
10°	5019	4882	4852
15°	4946	4718	4598
20°	4852	4492	4287
25°	4755	4240	3987
30°	4626	3982	3607
35°	4499	3704	3273
40°	4370	3418	2890
45°	4221	3100	2543
50°	4066	2779	2205
55°	3903	2438	1880
60°	3716	2080	1546
65°	3499	1718	1389
70°	3237	1380	1254
75°	2906	1209	1138
80°	2428	1004	981
85°	1647	654	728

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4221 cd/sqm

TEST NUMBER: P922999

CATALOG NUMBER: DFN2DIP-SQ3F0-120D040US940-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	414.5	3.3
10°-20°	1137.8	9.0
20°-30°	1597.5	12.7
30°-40°	1741.4	13.8
40°-50°	1600.5	12.7
50°-60°	1256.9	10.0
60°-70°	818.2	6.5
70°-80°	421.2	3.3
80°-90°	109.6	0.9
90°-100°	39.7	0.3
100°-110°	148.0	1.2
110°-120°	392.4	3.1
120°-130°	650.9	5.2
130°-140°	691.4	5.5
140°-150°	642.6	5.1
150°-160°	516.6	4.1
160°-170°	332.9	2.6
170°-180°	114.6	0.9
0°-30°	3149.8	24.9
0°-40°	4891.2	38.7
0°-60°	7748.6	61.4
0°-90°	9097.6	72.1
90°-120°	580.1	4.6
90°-150°	2565.0	20.3
90°-180°	3529.0	27.9
0°-180°	12626.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4422	4422	4422	4422	4422	
5°	4422	4403	4350	4386	4375	419
15°	4206	4162	4026	3950	3910	1185
25°	3818	3690	3426	3262	3202	1756
35°	3290	3086	2734	2482	2393	2059
45°	2690	2421	2001	1717	1621	2077
55°	2045	1733	1301	1061	985	1827
65°	1381	1056	696	560	548	1369
75°	736	456	320	292	288	779
85°	172	88	76	76	76	197
90°	1	10	17	22	24	12
95°	56	28	34	38	38	67
105°	265	291	53	63	66	283
115°	501	516	537	134	72	493
125°	708	720	736	742	745	632
135°	876	890	898	907	905	677
145°	1016	1016	1030	1036	1032	636
155°	1119	1112	1122	1127	1120	516
165°	1179	1174	1177	1183	1177	333
175°	1206	1200	1202	1208	1199	115
180°	1204	1204	1204	1204	1204	

TEST NUMBER: P922999

CATALOG NUMBER: DFN2DIP-SQ3F0-120D040US940-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4422.5	4422.5	4422.5	4422.5	4422.5
2.5°	4442.5	4422.5	4378.4	4418.7	4410.6
5°	4422.5	4402.6	4350.3	4386.4	4374.6
7.5°	4386.4	4362.6	4306.6	4322.3	4302.3
10°	4338.4	4310.4	4230.5	4218.2	4194.5
12.5°	4278.5	4242.5	4134.1	4110.4	4066.3
15°	4206.4	4162.2	4026.3	3950.3	3910.4
17.5°	4122.3	4058.2	3890.0	3802.2	3738.0
20°	4026.3	3946.1	3746.1	3646.3	3557.9
22.5°	3922.3	3830.2	3597.9	3462.0	3402.1
25°	3818.3	3690.0	3425.9	3262.0	3201.7
27.5°	3694.3	3557.9	3265.8	3077.7	2985.5
30°	3562.2	3409.8	3089.6	2885.8	2777.5
32.5°	3434.0	3249.7	2921.9	2681.6	2581.3
35°	3290.1	3085.8	2733.7	2481.5	2393.2
37.5°	3149.9	2929.5	2557.5	2281.1	2181.3
40°	3001.7	2761.8	2373.3	2089.2	1985.1
42.5°	2849.6	2593.6	2189.4	1893.0	1793.2
45°	2689.6	2421.3	2001.3	1716.8	1620.8
47.5°	2537.5	2253.5	1821.2	1536.8	1448.9
50°	2369.5	2085.4	1645.0	1368.6	1285.0
52.5°	2205.1	1904.9	1476.9	1212.7	1136.8
55°	2045.0	1732.9	1300.6	1060.7	984.7
57.5°	1881.1	1560.9	1144.8	920.6	856.5
60°	1713.0	1392.8	980.4	776.7	712.6
62.5°	1549.1	1228.9	840.3	648.5	616.5
65°	1380.9	1056.5	696.4	560.5	548.2
67.5°	1220.8	896.3	560.5	492.1	480.3
70°	1052.7	740.6	464.1	424.2	408.0
72.5°	892.6	596.2	388.1	356.2	348.2
75°	736.3	456.0	320.2	292.1	288.3
77.5°	580.5	324.0	252.3	236.1	228.0
80°	436.1	232.3	191.9	176.2	176.2
82.5°	304.1	156.2	132.1	123.9	123.9
85°	172.0	87.9	76.0	76.0	76.0
87.5°	64.1	31.8	31.8	28.0	28.0
90°	0.8	10.4	17.4	21.8	23.5
92.5°	21.8	18.3	20.9	22.6	23.5
95°	56.5	27.8	33.9	38.3	37.5
97.5°	101.9	30.5	44.4	47.1	47.9
100°	154.2	34.9	49.7	56.5	58.3
102.5°	211.6	210.0	51.4	60.9	63.6
105°	264.7	291.0	53.1	62.7	66.2
107.5°	326.6	348.4	54.9	64.5	67.9
110°	385.9	404.1	152.5	65.4	68.8

TEST NUMBER: P922999

CATALOG NUMBER: DFN2DIP-SQ3F0-120D040US940-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	441.7	457.3	442.5	67.1	69.7
115°	500.8	515.6	537.4	134.1	71.5
117.5°	552.2	569.6	584.5	459.9	231.7
120°	609.8	622.8	638.5	649.0	531.4
122.5°	658.4	672.4	689.9	695.1	696.0
125°	708.1	719.5	736.0	742.2	744.8
127.5°	753.4	765.6	778.7	787.5	788.3
130°	796.1	810.1	819.6	829.2	828.4
132.5°	839.6	851.0	860.6	868.4	867.6
135°	876.3	890.3	898.0	906.8	905.1
137.5°	914.5	925.0	933.8	942.4	939.9
140°	952.0	959.0	968.6	976.4	972.1
142.5°	983.5	989.5	1000.9	1007.7	1003.4
145°	1016.5	1015.7	1030.4	1036.5	1032.2
147.5°	1045.2	1042.6	1057.4	1061.8	1058.4
150°	1073.1	1067.0	1081.0	1086.2	1081.8
152.5°	1096.6	1089.7	1102.7	1108.0	1101.9
155°	1119.3	1111.5	1121.9	1127.1	1120.2
157.5°	1137.6	1130.6	1138.5	1144.6	1137.6
160°	1153.2	1148.0	1153.2	1158.4	1152.4
162.5°	1167.2	1162.0	1166.4	1172.4	1164.6
165°	1179.4	1174.2	1176.8	1182.9	1176.8
167.5°	1189.0	1183.7	1186.4	1192.5	1184.6
170°	1196.9	1191.6	1193.3	1199.4	1191.6
172.5°	1202.0	1196.9	1198.6	1204.7	1196.9
175°	1206.3	1200.2	1202.0	1208.1	1199.4
177.5°	1208.1	1202.0	1202.9	1209.1	1201.2
180°	1203.8	1203.8	1203.8	1203.8	1203.8

TEST NUMBER: P922999

CATALOG NUMBER: DFN2DIP-SQ3F0-120D040US940-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.60	15.65	15.35	16.42	17.34	10.56	11.61	11.31	12.38	13.30
	3H	16.29	17.23	17.05	18.01	18.96	11.76	12.70	12.52	13.48	14.43
	4H	16.91	17.79	17.69	18.58	19.54	12.22	13.10	13.00	13.89	14.85
	6H	17.34	18.15	18.13	18.94	19.92	12.54	13.36	13.34	14.15	15.13
	8H	17.47	18.24	18.27	19.05	20.03	12.64	13.41	13.44	14.22	15.20
	12H	17.53	18.27	18.34	19.08	20.08	12.68	13.42	13.49	14.23	15.23
4H	2H	14.65	15.53	15.43	16.31	17.28	11.18	12.07	11.97	12.85	13.82
	3H	16.49	17.22	17.29	18.04	19.02	12.55	13.28	13.34	14.10	15.08
	4H	17.19	17.85	18.00	18.67	19.68	13.10	13.76	13.91	14.58	15.59
	6H	17.71	18.28	18.54	19.13	20.14	13.52	14.10	14.35	14.94	15.95
	8H	17.89	18.42	18.72	19.26	20.29	13.65	14.19	14.48	15.02	16.05
	12H	17.99	18.47	18.84	19.33	20.36	13.72	14.20	14.57	15.06	16.09
8H	4H	17.17	17.71	18.00	18.54	19.57	13.39	13.93	14.22	14.77	15.79
	6H	17.74	18.18	18.60	19.06	20.09	13.91	14.35	14.77	15.23	16.26
	8H	17.95	18.35	18.82	19.22	20.26	14.09	14.49	14.96	15.36	16.41
	12H	18.10	18.44	18.97	19.31	20.41	14.22	14.56	15.09	15.43	16.53
12H	4H	17.13	17.61	17.98	18.47	19.50	13.40	13.89	14.25	14.75	15.78
	6H	17.71	18.11	18.58	18.98	20.03	13.96	14.35	14.83	15.23	16.27
	8H	17.94	18.29	18.81	19.15	20.25	14.17	14.52	15.04	15.38	16.48

END OF REPORT