

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925447

Luminaire Tested: DFN2DIP-SQ3F0-040D060US950-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925447
REPORT IS A COMBINATION OF REPORTS P901418 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-040D060US950-RLLONL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8910.3 lumens
Efficiency: N/A
Efficacy: 115.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 77.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925447
CATALOG NUMBER: DFN2DIP-SQ3F0-040D060US950-RLLONL

Luminous Intensity Polar Plot

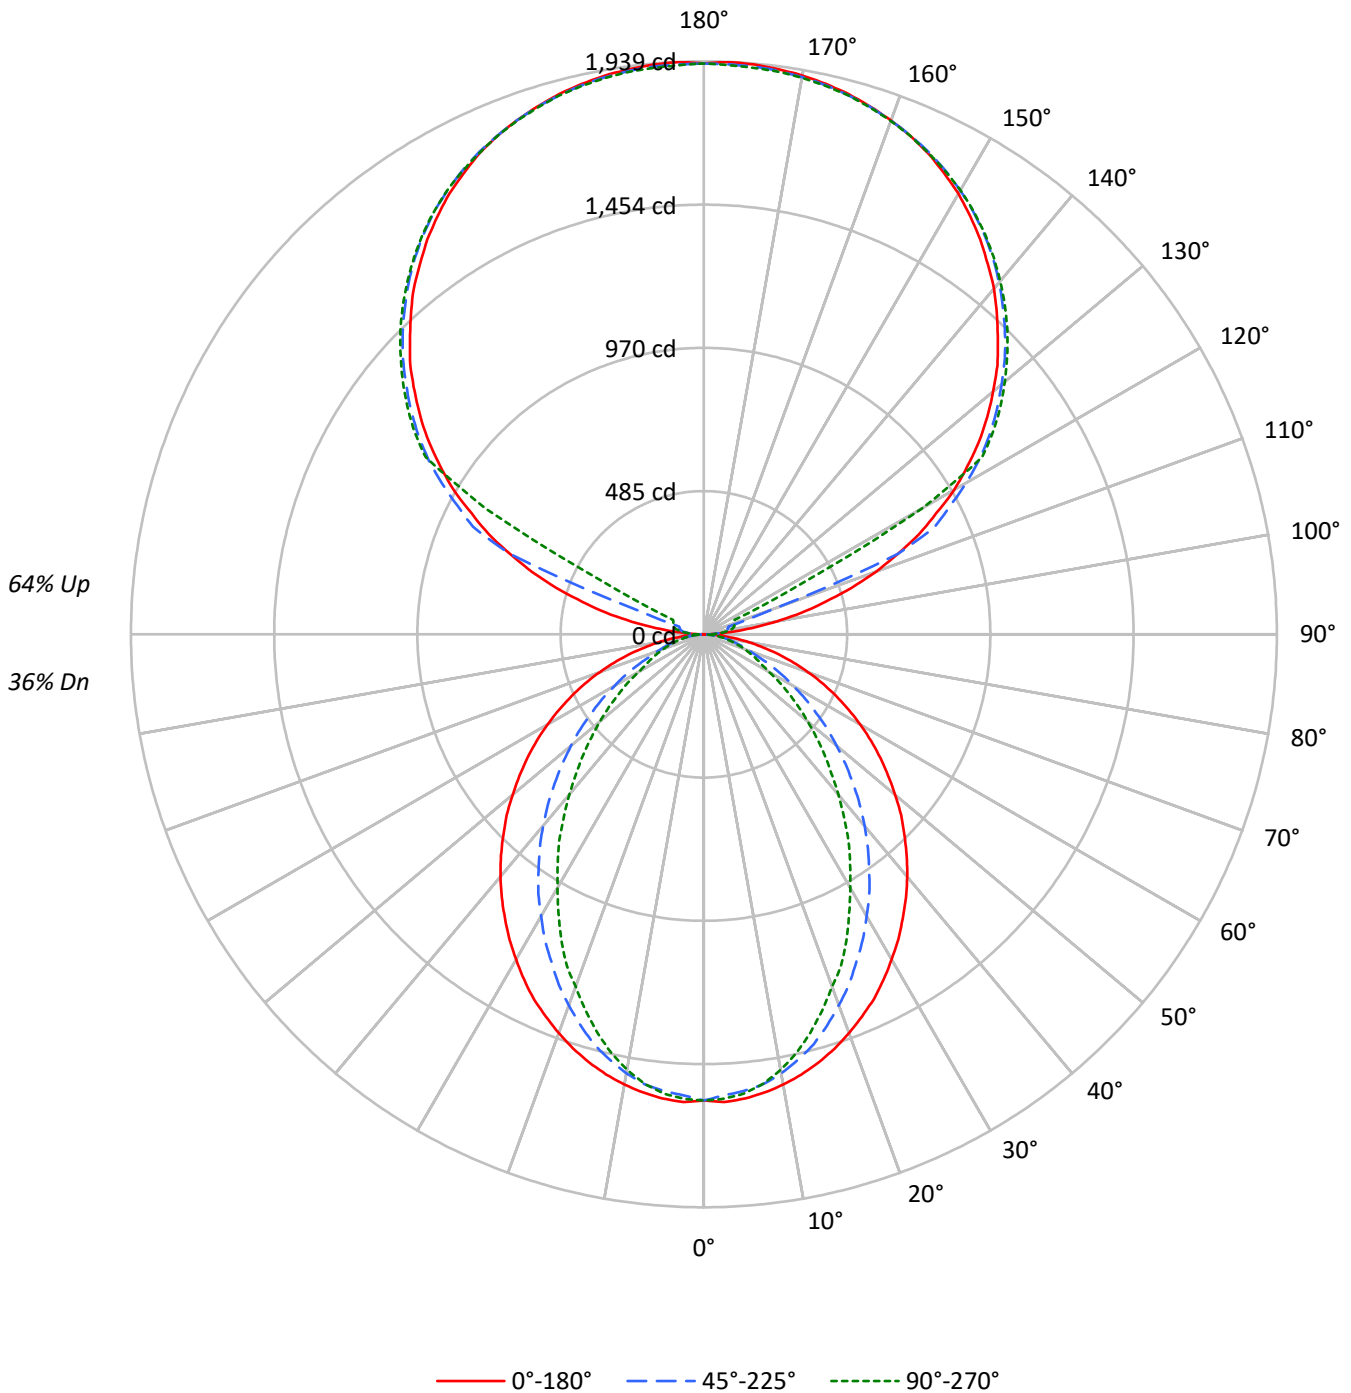



TEST NUMBER: P925447

CATALOG NUMBER: DFN2DIP-SQ3F0-040D060US950-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	36				36
1	95	91	87	84	86	83	80	77	67	65	63	52	51	50	39	38	38	31				31
2	87	80	74	69	78	73	68	63	59	56	53	46	44	42	35	33	32	27				27
3	79	70	63	58	72	64	58	53	52	48	45	41	38	36	31	29	28	23				23
4	73	63	55	49	66	57	51	46	47	42	38	37	34	31	28	26	24	20				20
5	67	56	48	42	60	51	44	39	42	37	33	33	30	27	25	23	21	18				18
6	62	50	42	37	56	46	39	34	38	33	29	30	27	24	23	21	19	16				16
7	57	45	38	32	52	41	35	30	34	29	26	28	24	21	21	19	17	14				14
8	53	41	34	29	48	38	31	27	31	26	23	25	22	19	20	17	15	13				13
9	49	37	30	25	45	34	28	24	29	24	20	23	20	17	18	16	14	12				12
10	46	34	27	23	42	32	25	21	26	22	18	22	18	15	17	14	13	11				11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1807	1807	1807
5°	1809	1777	1789
10°	1790	1741	1730
15°	1764	1682	1640
20°	1730	1602	1529
25°	1696	1512	1422
30°	1650	1420	1286
35°	1605	1321	1167
40°	1559	1219	1031
45°	1505	1105	907
50°	1450	991	786
55°	1392	869	670
60°	1325	742	551
65°	1248	613	495
70°	1154	492	447
75°	1036	431	406
80°	866	358	350
85°	587	233	259

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1505 cd/sqm



TEST NUMBER: P925447

CATALOG NUMBER: DFN2DIP-SQ3F0-040D060US950-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	147.8	1.7
10°-20°	405.8	4.6
20°-30°	569.7	6.4
30°-40°	621.0	7.0
40°-50°	570.8	6.4
50°-60°	448.2	5.0
60°-70°	291.8	3.3
70°-80°	150.2	1.7
80°-90°	41.8	0.5
90°-100°	63.7	0.7
100°-110°	237.5	2.7
110°-120°	629.8	7.1
120°-130°	1044.5	11.7
130°-140°	1109.5	12.5
140°-150°	1031.2	11.6
150°-160°	829.1	9.3
160°-170°	534.2	6.0
170°-180°	183.9	2.1
0°-30°	1123.3	12.6
0°-40°	1744.3	19.6
0°-60°	2763.3	31.0
0°-90°	3247.0	36.4
90°-120°	930.9	10.4
90°-150°	4116.2	46.2
90°-180°	5663.0	63.6
0°-180°	8910.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1577	1577	1577	1577	1577	
5°	1577	1570	1551	1564	1560	150
15°	1500	1484	1436	1409	1395	423
25°	1362	1316	1222	1163	1142	626
35°	1173	1100	975	885	853	734
45°	959	864	714	612	578	741
55°	729	618	464	378	351	652
65°	492	377	248	200	196	488
75°	262	163	114	104	103	278
85°	61	31	27	27	27	70
90°	1	17	28	35	38	8
95°	91	45	54	62	60	108
105°	425	467	85	101	106	454
115°	804	828	862	215	115	791
125°	1136	1155	1181	1191	1195	1014
135°	1406	1429	1441	1455	1452	1086
145°	1631	1630	1654	1663	1656	1020
155°	1796	1784	1800	1809	1798	828
165°	1893	1884	1888	1898	1888	535
175°	1936	1926	1929	1939	1925	184
180°	1932	1932	1932	1932	1932	



TEST NUMBER: P925447

CATALOG NUMBER: DFN2DIP-SQ3F0-040D060US950-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1577.2	1577.2	1577.2	1577.2	1577.2
2.5°	1584.3	1577.2	1561.4	1575.8	1572.9
5°	1577.2	1570.0	1551.4	1564.3	1560.1
7.5°	1564.3	1555.8	1535.8	1541.4	1534.3
10°	1547.2	1537.2	1508.7	1504.3	1495.9
12.5°	1525.8	1512.9	1474.3	1465.8	1450.1
15°	1500.1	1484.3	1435.9	1408.8	1394.6
17.5°	1470.1	1447.2	1387.2	1355.9	1333.0
20°	1435.9	1407.2	1335.9	1300.3	1268.8
22.5°	1398.8	1365.9	1283.0	1234.6	1213.3
25°	1361.6	1315.9	1221.7	1163.3	1141.7
27.5°	1317.5	1268.8	1164.6	1097.6	1064.7
30°	1270.3	1216.0	1101.8	1029.1	990.5
32.5°	1224.6	1158.9	1042.0	956.3	920.5
35°	1173.3	1100.4	974.9	884.9	853.4
37.5°	1123.3	1044.7	912.0	813.5	777.9
40°	1070.5	984.9	846.4	745.1	708.0
42.5°	1016.2	924.9	780.8	675.1	639.5
45°	959.2	863.5	713.7	612.3	578.0
47.5°	905.0	803.6	649.5	548.1	516.7
50°	845.0	743.6	586.6	488.1	458.2
52.5°	786.4	679.3	526.7	432.4	405.4
55°	729.3	618.0	463.8	378.3	351.2
57.5°	670.9	556.7	408.2	328.3	305.5
60°	610.8	496.7	349.6	276.9	254.1
62.5°	552.5	438.3	299.7	231.2	219.9
65°	492.5	376.7	248.3	199.9	195.5
67.5°	435.4	319.7	199.9	175.5	171.2
70°	375.4	264.1	165.5	151.3	145.5
72.5°	318.3	212.6	138.4	127.1	124.2
75°	262.5	162.7	114.2	104.2	102.8
77.5°	207.0	115.5	90.0	84.2	81.3
80°	155.5	82.8	68.4	62.9	62.9
82.5°	108.5	55.7	47.1	44.2	44.2
85°	61.3	31.4	27.1	27.1	27.1
87.5°	22.9	11.4	11.4	10.0	10.0
90°	1.3	16.8	27.9	35.0	37.7
92.5°	35.0	29.4	33.5	36.3	37.7
95°	90.8	44.6	54.5	61.6	60.1
97.5°	163.5	48.9	71.2	75.6	76.9
100°	247.5	55.9	79.7	90.8	93.6
102.5°	339.6	337.0	82.5	97.8	102.1
105°	424.9	466.9	85.3	100.6	106.3
107.5°	524.2	559.0	88.1	103.4	109.0
110°	619.3	648.5	244.7	104.9	110.4



TEST NUMBER: P925447

CATALOG NUMBER: DFN2DIP-SQ3F0-040D060US950-RLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	708.7	733.8	710.1	107.5	111.9
115°	803.7	827.5	862.5	215.3	114.7
117.5°	886.2	914.1	938.0	738.0	371.8
120°	978.5	999.4	1024.7	1041.4	852.7
122.5°	1056.7	1079.1	1107.1	1115.4	1116.9
125°	1136.4	1154.6	1181.1	1191.0	1195.1
127.5°	1209.1	1228.7	1249.7	1263.7	1265.0
130°	1277.6	1300.0	1315.3	1330.7	1329.4
132.5°	1347.5	1365.7	1381.0	1393.6	1392.3
135°	1406.3	1428.7	1441.1	1455.2	1452.4
137.5°	1467.6	1484.4	1498.5	1512.5	1508.4
140°	1527.7	1539.1	1554.4	1566.9	1560.0
142.5°	1578.2	1588.0	1606.2	1617.2	1610.3
145°	1631.3	1629.8	1653.6	1663.4	1656.4
147.5°	1677.3	1673.1	1696.9	1703.8	1698.4
150°	1722.2	1712.3	1734.8	1743.1	1736.1
152.5°	1759.8	1748.7	1769.6	1778.1	1768.2
155°	1796.2	1783.7	1800.5	1808.8	1797.6
157.5°	1825.6	1814.4	1827.0	1836.8	1825.6
160°	1850.8	1842.3	1850.8	1859.1	1849.3
162.5°	1873.0	1864.7	1871.7	1881.5	1868.9
165°	1892.6	1884.3	1888.4	1898.3	1888.4
167.5°	1908.0	1899.6	1903.9	1913.7	1901.0
170°	1920.7	1912.2	1915.1	1924.8	1912.2
172.5°	1929.0	1920.7	1923.5	1933.3	1920.7
175°	1936.0	1926.1	1929.0	1938.7	1924.8
177.5°	1938.7	1929.0	1930.4	1940.2	1927.7
180°	1931.8	1931.8	1931.8	1931.8	1931.8



TEST NUMBER: P925447
 CATALOG NUMBER: DFN2DIP-SQ3F0-040D060US950-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.75	8.49	8.83	9.55	11.01	3.71	4.45	4.79	5.51	6.97
	3H	9.42	10.07	10.50	11.15	12.62	4.89	5.54	5.97	6.62	8.09
	4H	10.02	10.64	11.11	11.72	13.20	5.33	5.95	6.42	7.03	8.51
	6H	10.43	11.00	11.53	12.08	13.58	5.64	6.21	6.74	7.29	8.78
	8H	10.55	11.10	11.66	12.19	13.68	5.73	6.27	6.83	7.36	8.85
	12H	10.61	11.13	11.72	12.22	13.72	5.76	6.28	6.87	7.37	8.88
4H	2H	7.76	8.38	8.86	9.46	10.94	4.30	4.91	5.39	5.99	7.47
	3H	9.57	10.09	10.68	11.19	12.69	5.63	6.14	6.73	7.25	8.74
	4H	10.26	10.73	11.37	11.83	13.34	6.17	6.64	7.28	7.74	9.25
	6H	10.76	11.17	11.88	12.29	13.79	6.57	6.98	7.69	8.10	9.60
	8H	10.93	11.31	12.05	12.42	13.94	6.70	7.08	7.81	8.19	9.71
	12H	11.02	11.36	12.15	12.49	14.01	6.75	7.10	7.89	8.22	9.75
8H	4H	10.22	10.59	11.33	11.71	13.23	6.44	6.82	7.55	7.93	9.45
	6H	10.77	11.08	11.91	12.24	13.76	6.94	7.26	8.08	8.41	9.93
	8H	10.99	11.26	12.13	12.39	13.93	7.13	7.40	8.27	8.54	10.07
	12H	11.12	11.36	12.26	12.49	14.06	7.24	7.48	8.39	8.61	10.18
12H	4H	10.16	10.51	11.30	11.63	13.15	6.44	6.78	7.57	7.90	9.43
	6H	10.75	11.02	11.89	12.15	13.69	6.99	7.26	8.14	8.40	9.94
	8H	10.96	11.20	12.11	12.33	13.90	7.19	7.43	8.34	8.56	10.14