

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925457

Luminaire Tested: DFN2DIP-SQ3F0-040D090US950-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925457
REPORT IS A COMBINATION OF REPORTS P901471 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-040D090US950-FLLONL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12277.9 lumens
Efficiency: N/A
Efficacy: 121.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 100.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925457

CATALOG NUMBER: DFN2DIP-SQ3F0-040D090US950-FLLONL

Luminous Intensity Polar Plot

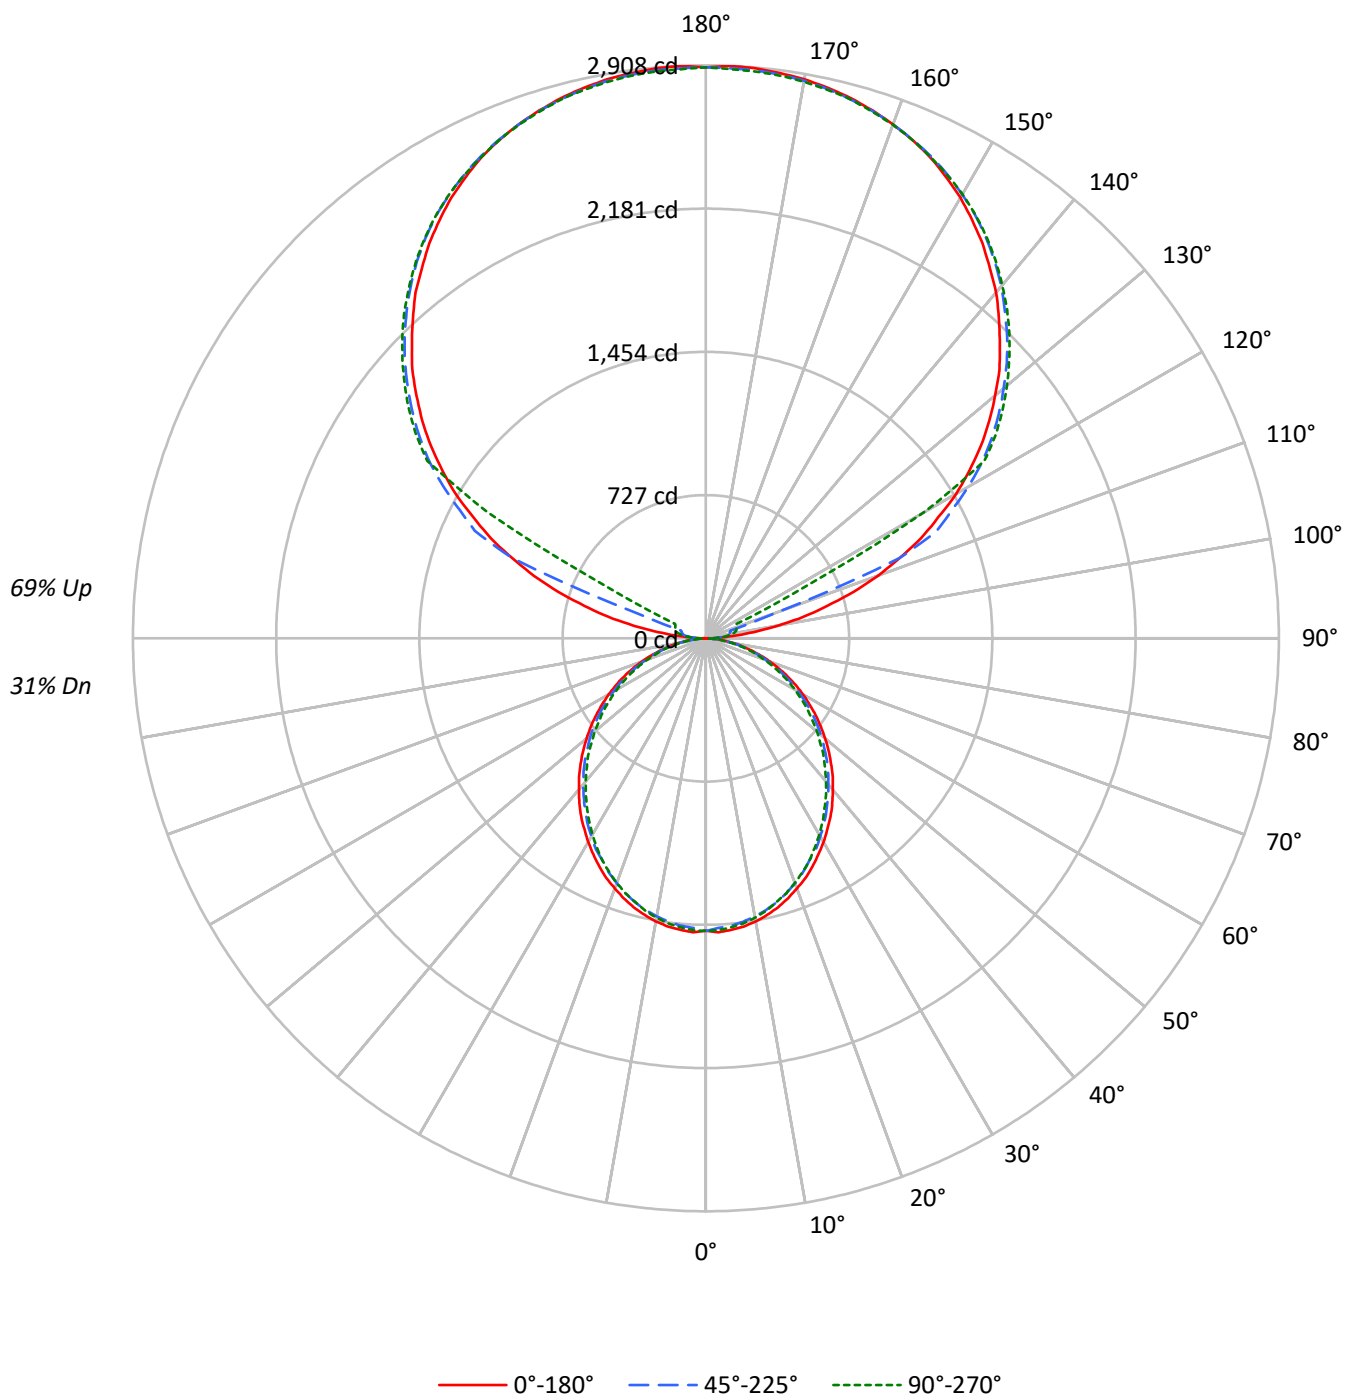

TEST NUMBER: P925457

CATALOG NUMBER: DFN2DIP-SQ3F0-040D090US950-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	38	38	38
1	93	89	86	82	84	80	77	74	64	61	59	48	47	46	34	33	32
2	85	78	72	67	76	70	65	61	56	52	49	42	40	38	30	29	27
3	78	68	61	56	69	62	56	51	49	45	41	37	35	32	26	25	23
4	71	60	53	47	63	55	48	43	44	39	35	33	30	27	24	22	20
5	65	54	46	40	58	49	42	37	39	34	30	30	26	24	21	19	17
6	60	48	40	35	53	44	37	32	35	30	26	27	23	21	19	17	15
7	55	43	36	30	49	39	33	28	32	27	23	24	21	18	18	15	14
8	51	39	32	27	46	36	29	24	29	24	20	22	19	16	16	14	12
9	47	36	28	24	43	32	26	22	26	21	18	20	17	14	15	13	11
10	44	33	26	21	40	30	23	19	24	19	16	19	15	13	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1701	1701	1701
5°	1703	1676	1688
10°	1688	1653	1665
15°	1662	1624	1629
20°	1628	1585	1592
25°	1593	1539	1549
30°	1550	1496	1494
35°	1509	1445	1437
40°	1459	1394	1382
45°	1409	1342	1326
50°	1355	1288	1261
55°	1297	1226	1202
60°	1232	1151	1134
65°	1162	1074	1053
70°	1071	981	966
75°	946	868	885
80°	795	724	732
85°	560	479	479

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1984 cd/sqm

TEST NUMBER: P925457

CATALOG NUMBER: DFN2DIP-SQ3F0-040D090US950-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	139.8	1.1
10°-20°	393.2	3.2
20°-30°	577.9	4.7
30°-40°	671.2	5.5
40°-50°	670.3	5.5
50°-60°	584.5	4.8
60°-70°	432.1	3.5
70°-80°	244.5	2.0
80°-90°	69.6	0.6
90°-100°	95.6	0.8
100°-110°	356.2	2.9
110°-120°	944.7	7.7
120°-130°	1566.8	12.8
130°-140°	1664.3	13.6
140°-150°	1546.8	12.6
150°-160°	1243.6	10.1
160°-170°	801.3	6.5
170°-180°	275.8	2.2
0°-30°	1110.8	9.0
0°-40°	1782.0	14.5
0°-60°	3036.8	24.7
0°-90°	3782.9	30.8
90°-120°	1396.4	11.4
90°-150°	6174.3	50.3
90°-180°	8495.0	69.2
0°-180°	12277.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1485	1485	1485	1485	1485	
5°	1485	1479	1463	1475	1472	141
15°	1413	1405	1386	1392	1385	398
25°	1279	1268	1244	1246	1244	589
35°	1104	1090	1067	1058	1051	689
45°	898	888	867	851	845	693
55°	680	671	654	637	630	608
65°	458	450	436	423	416	453
75°	240	237	230	221	224	256
85°	58	57	56	51	50	65
90°	2	25	42	53	56	11
95°	136	67	82	92	90	161
105°	637	700	128	151	159	681
115°	1206	1241	1294	323	172	1187
125°	1704	1732	1772	1786	1793	1520
135°	2109	2143	2162	2183	2179	1629
145°	2447	2445	2480	2495	2485	1530
155°	2694	2676	2701	2713	2696	1242
165°	2839	2826	2833	2847	2833	802
175°	2904	2889	2894	2908	2887	276
180°	2898	2898	2898	2898	2898	

TEST NUMBER: P925457

CATALOG NUMBER: DFN2DIP-SQ3F0-040D090US950-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1484.8	1484.8	1484.8	1484.8	1484.8
2.5°	1493.5	1486.3	1470.6	1484.8	1482.1
5°	1484.8	1479.2	1463.4	1474.8	1472.1
7.5°	1474.8	1466.3	1450.6	1462.1	1459.2
10°	1459.2	1449.2	1432.1	1443.5	1439.2
12.5°	1437.7	1429.2	1412.1	1419.3	1416.3
15°	1413.4	1405.0	1386.4	1392.1	1385.0
17.5°	1383.5	1375.0	1356.4	1363.5	1356.4
20°	1350.6	1342.1	1322.1	1326.3	1320.8
22.5°	1317.9	1305.0	1286.4	1286.4	1283.5
25°	1279.2	1267.9	1243.6	1246.4	1243.6
27.5°	1236.4	1226.4	1208.0	1203.7	1196.6
30°	1193.6	1182.2	1160.8	1156.5	1150.8
32.5°	1147.9	1139.5	1116.6	1108.0	1102.2
35°	1103.7	1089.5	1066.6	1058.0	1050.8
37.5°	1053.7	1040.8	1017.9	1008.0	1000.8
40°	1002.4	990.8	967.9	955.2	949.5
42.5°	952.4	940.8	918.1	903.7	895.2
45°	898.1	888.2	866.6	851.1	845.2
47.5°	845.2	835.2	812.4	796.7	788.2
50°	789.5	782.4	762.4	742.4	735.2
52.5°	735.2	725.3	706.8	691.1	681.1
55°	679.7	671.0	654.0	636.8	629.7
57.5°	623.9	616.9	598.2	581.1	575.4
60°	568.2	562.6	542.6	526.9	522.6
62.5°	514.0	504.0	489.8	475.5	469.7
65°	458.4	449.7	435.5	422.6	415.6
67.5°	401.3	394.0	381.3	371.3	365.6
70°	348.4	342.7	329.8	319.8	314.2
72.5°	294.2	288.4	281.3	271.3	267.0
75°	239.8	237.1	229.8	221.3	224.2
77.5°	191.3	185.6	182.7	178.4	174.2
80°	142.8	141.3	138.4	134.2	131.4
82.5°	97.1	97.1	95.8	90.0	90.0
85°	58.5	57.1	55.7	51.3	50.0
87.5°	25.8	22.9	20.0	15.7	14.2
90°	2.0	25.2	41.8	52.6	56.5
92.5°	52.6	44.1	50.3	54.6	56.5
95°	136.2	67.0	81.7	92.3	90.2
97.5°	245.3	73.5	106.8	113.2	115.2
100°	371.2	84.0	119.5	136.2	140.4
102.5°	509.4	505.4	123.7	146.6	153.1
105°	637.4	700.4	127.9	150.9	159.3
107.5°	786.3	838.6	132.2	155.1	163.6
110°	928.9	972.8	367.0	157.3	165.6

TEST NUMBER: P925457

CATALOG NUMBER: DFN2DIP-SQ3F0-040D090US950-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1063.1	1100.7	1065.1	161.3	167.8
115°	1205.6	1241.2	1293.7	322.9	172.0
117.5°	1329.3	1371.2	1407.0	1107.0	557.7
120°	1467.7	1499.1	1537.0	1562.1	1279.0
122.5°	1585.1	1618.7	1660.7	1673.1	1675.4
125°	1704.5	1731.9	1771.8	1786.5	1792.7
127.5°	1813.6	1842.9	1874.6	1895.5	1897.5
130°	1916.4	1950.1	1973.0	1996.1	1994.1
132.5°	2021.2	2048.6	2071.5	2090.5	2088.5
135°	2109.4	2143.0	2161.7	2182.8	2178.6
137.5°	2201.5	2226.6	2247.8	2268.7	2262.5
140°	2291.6	2308.6	2331.5	2350.4	2340.0
142.5°	2367.4	2382.0	2409.1	2425.8	2415.4
145°	2447.0	2444.7	2480.4	2495.1	2484.6
147.5°	2516.0	2509.8	2545.4	2555.9	2547.6
150°	2583.2	2568.5	2602.1	2614.5	2604.1
152.5°	2639.7	2623.0	2654.4	2667.1	2652.4
155°	2694.3	2675.6	2700.7	2713.2	2696.5
157.5°	2738.4	2721.7	2740.6	2755.2	2738.4
160°	2776.1	2763.5	2776.1	2788.6	2773.9
162.5°	2809.5	2797.0	2807.5	2822.2	2803.3
165°	2838.9	2826.4	2832.7	2847.4	2832.7
167.5°	2862.1	2849.4	2855.8	2870.5	2851.6
170°	2881.0	2868.3	2872.5	2887.2	2868.3
172.5°	2893.5	2881.0	2885.2	2899.9	2881.0
175°	2903.9	2889.2	2893.5	2908.1	2887.2
177.5°	2908.1	2893.5	2895.7	2910.4	2891.5
180°	2897.7	2897.7	2897.7	2897.7	2897.7

TEST NUMBER: P925457

CATALOG NUMBER: DFN2DIP-SQ3F0-040D090US950-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.98	7.69	8.09	8.79	10.32	6.54	7.25	7.64	8.35	9.87
	3H	8.63	9.26	9.74	10.37	11.91	8.13	8.77	9.25	9.88	11.42
	4H	9.20	9.81	10.33	10.92	12.46	8.71	9.31	9.83	10.43	11.97
	6H	9.59	10.15	10.72	11.26	12.82	9.09	9.65	10.22	10.76	12.32
	8H	9.69	10.22	10.83	11.35	12.90	9.19	9.72	10.32	10.85	12.40
	12H	9.73	10.23	10.87	11.36	12.93	9.22	9.72	10.36	10.85	12.42
4H	2H	7.42	8.02	8.55	9.14	10.68	7.06	7.67	8.20	8.78	10.32
	3H	9.27	9.77	10.40	10.91	12.46	8.86	9.36	10.00	10.50	12.06
	4H	9.97	10.43	11.11	11.56	13.14	9.55	10.01	10.69	11.14	12.71
	6H	10.47	10.87	11.62	12.02	13.59	10.04	10.44	11.19	11.59	13.15
	8H	10.62	10.99	11.76	12.13	13.71	10.18	10.55	11.33	11.69	13.27
	12H	10.68	11.02	11.84	12.17	13.76	10.23	10.57	11.39	11.72	13.31
8H	4H	10.15	10.52	11.30	11.66	13.25	9.77	10.14	10.92	11.29	12.87
	6H	10.77	11.08	11.94	12.26	13.84	10.38	10.69	11.55	11.88	13.45
	8H	10.98	11.25	12.16	12.41	14.02	10.59	10.86	11.77	12.02	13.62
	12H	11.11	11.34	12.28	12.50	14.13	10.70	10.93	11.87	12.09	13.72
12H	4H	10.13	10.46	11.29	11.62	13.21	9.76	10.10	10.92	11.25	12.84
	6H	10.80	11.06	11.97	12.23	13.83	10.42	10.69	11.60	11.85	13.45
	8H	11.03	11.26	12.20	12.42	14.06	10.65	10.88	11.82	12.04	13.67