

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925462

Luminaire Tested: DFN2DIP-SQ3F0-040D100US950-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925462
REPORT IS A COMBINATION OF REPORTS P899970 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-040D100US950-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11686.5 lumens
Efficiency: N/A
Efficacy: 106.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 109.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925462

CATALOG NUMBER: DFN2DIP-SQ3F0-040D100US950-RLLFLL

Luminous Intensity Polar Plot

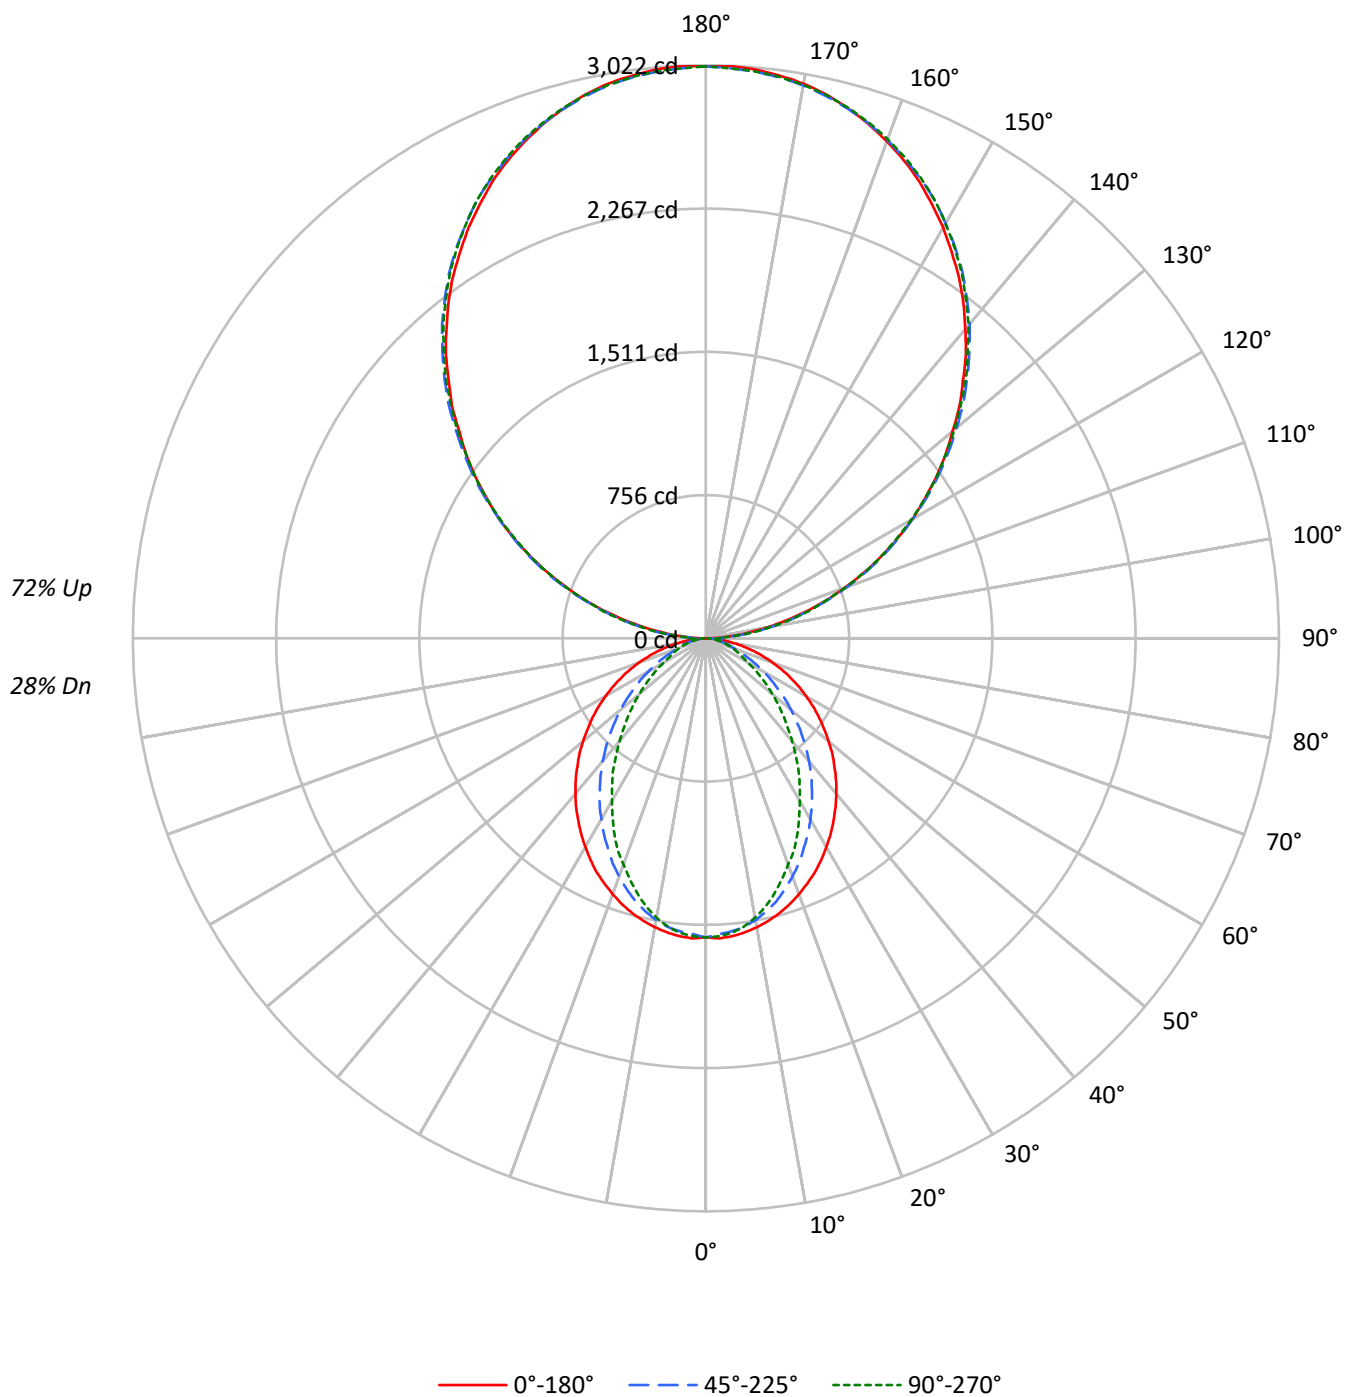

TEST NUMBER: P925462

CATALOG NUMBER: DFN2DIP-SQ3F0-040D100US950-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36
1	93	89	85	82	83	80	77	74	62	60	59	47	45	44	32	31	31
2	85	78	72	67	76	70	65	61	55	52	49	41	39	37	28	27	26
3	78	69	62	56	69	62	56	51	49	45	41	37	34	32	25	24	23
4	71	61	53	48	63	55	48	44	43	39	35	33	30	27	23	21	20
5	65	54	47	41	58	49	42	37	39	34	31	29	26	24	21	19	17
6	60	49	41	35	54	44	37	32	35	30	27	27	23	21	19	17	15
7	55	44	36	31	50	40	33	28	32	27	23	24	21	19	17	15	14
8	51	40	32	27	46	36	30	25	29	24	21	22	19	16	16	14	12
9	48	36	29	24	43	33	27	22	26	22	19	20	17	15	15	13	11
10	45	33	26	22	40	30	24	20	24	20	17	19	16	13	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1807	1807	1807
5°	1809	1777	1789
10°	1790	1741	1730
15°	1764	1682	1640
20°	1730	1602	1529
25°	1696	1512	1422
30°	1650	1420	1286
35°	1605	1321	1167
40°	1559	1219	1031
45°	1505	1105	907
50°	1450	991	786
55°	1392	869	670
60°	1325	742	551
65°	1248	613	495
70°	1154	492	447
75°	1036	431	406
80°	866	358	350
85°	587	233	259

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 3034 cd/sqm

TEST NUMBER: P925462

CATALOG NUMBER: DFN2DIP-SQ3F0-040D100US950-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	147.8	1.3
10°-20°	405.8	3.5
20°-30°	569.7	4.9
30°-40°	621.0	5.3
40°-50°	570.8	4.9
50°-60°	448.2	3.8
60°-70°	291.8	2.5
70°-80°	150.2	1.3
80°-90°	46.9	0.4
90°-100°	186.7	1.6
100°-110°	593.2	5.1
110°-120°	1015.2	8.7
120°-130°	1335.1	11.4
130°-140°	1498.6	12.8
140°-150°	1469.5	12.6
150°-160°	1232.7	10.5
160°-170°	817.5	7.0
170°-180°	285.7	2.4
0°-30°	1123.3	9.6
0°-40°	1744.3	14.9
0°-60°	2763.3	23.6
0°-90°	3252.2	27.8
90°-120°	1795.1	15.4
90°-150°	6098.3	52.2
90°-180°	8434.0	72.2
0°-180°	11686.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1577	1577	1577	1577	1577	
5°	1577	1570	1551	1564	1560	150
15°	1500	1484	1436	1409	1395	423
25°	1362	1316	1222	1163	1142	626
35°	1173	1100	975	885	853	734
45°	959	864	714	612	578	741
55°	729	618	464	378	351	652
65°	492	377	248	200	196	488
75°	262	163	114	104	103	278
85°	61	31	27	27	27	70
90°	3	33	89	84	86	12
95°	133	158	163	163	158	148
105°	548	555	560	565	565	578
115°	1019	1033	1029	1026	1019	1008
125°	1482	1504	1497	1489	1486	1324
135°	1916	1945	1950	1948	1940	1481
145°	2327	2345	2360	2362	2352	1454
155°	2661	2668	2676	2689	2680	1225
165°	2894	2892	2892	2910	2897	817
175°	3012	3004	2999	3017	3002	286
180°	3017	3017	3017	3017	3017	

TEST NUMBER: P925462

CATALOG NUMBER: DFN2DIP-SQ3F0-040D100US950-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1577.2	1577.2	1577.2	1577.2	1577.2
2.5°	1584.3	1577.2	1561.4	1575.8	1572.9
5°	1577.2	1570.0	1551.4	1564.3	1560.1
7.5°	1564.3	1555.8	1535.8	1541.4	1534.3
10°	1547.2	1537.2	1508.7	1504.3	1495.9
12.5°	1525.8	1512.9	1474.3	1465.8	1450.1
15°	1500.1	1484.3	1435.9	1408.8	1394.6
17.5°	1470.1	1447.2	1387.2	1355.9	1333.0
20°	1435.9	1407.2	1335.9	1300.3	1268.8
22.5°	1398.8	1365.9	1283.0	1234.6	1213.3
25°	1361.6	1315.9	1221.7	1163.3	1141.7
27.5°	1317.5	1268.8	1164.6	1097.6	1064.7
30°	1270.3	1216.0	1101.8	1029.1	990.5
32.5°	1224.6	1158.9	1042.0	956.3	920.5
35°	1173.3	1100.4	974.9	884.9	853.4
37.5°	1123.3	1044.7	912.0	813.5	777.9
40°	1070.5	984.9	846.4	745.1	708.0
42.5°	1016.2	924.9	780.8	675.1	639.5
45°	959.2	863.5	713.7	612.3	578.0
47.5°	905.0	803.6	649.5	548.1	516.7
50°	845.0	743.6	586.6	488.1	458.2
52.5°	786.4	679.3	526.7	432.4	405.4
55°	729.3	618.0	463.8	378.3	351.2
57.5°	670.9	556.7	408.2	328.3	305.5
60°	610.8	496.7	349.6	276.9	254.1
62.5°	552.5	438.3	299.7	231.2	219.9
65°	492.5	376.7	248.3	199.9	195.5
67.5°	435.4	319.7	199.9	175.5	171.2
70°	375.4	264.1	165.5	151.3	145.5
72.5°	318.3	212.6	138.4	127.1	124.2
75°	262.5	162.7	114.2	104.2	102.8
77.5°	207.0	115.5	90.0	84.2	81.3
80°	155.5	82.8	68.4	62.9	62.9
82.5°	108.5	55.7	47.1	44.2	44.2
85°	61.3	31.4	27.1	27.1	27.1
87.5°	22.9	11.4	11.4	10.0	10.0
90°	2.8	32.7	89.1	83.7	86.4
92.5°	56.4	76.4	79.2	81.9	81.9
95°	132.8	158.3	162.8	162.8	158.3
97.5°	221.0	244.7	254.7	254.7	254.7
100°	322.9	343.8	351.1	351.1	348.4
102.5°	430.3	445.7	455.7	458.4	455.7
105°	547.6	554.8	560.3	564.9	564.9
107.5°	664.0	675.0	675.0	676.8	664.0
110°	776.8	791.3	791.3	791.3	784.1

TEST NUMBER: P925462

CATALOG NUMBER: DFN2DIP-SQ3F0-040D100US950-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	898.7	914.1	911.5	904.1	898.7
115°	1018.8	1033.3	1028.8	1026.0	1018.8
117.5°	1137.9	1158.0	1145.2	1137.9	1130.6
120°	1257.9	1278.0	1257.9	1257.9	1249.8
122.5°	1367.1	1392.6	1379.9	1372.6	1367.1
125°	1481.8	1504.5	1497.2	1489.0	1486.3
127.5°	1593.7	1621.8	1611.8	1600.9	1593.7
130°	1698.2	1730.9	1726.5	1720.9	1711.0
132.5°	1815.6	1841.0	1842.8	1830.2	1822.8
135°	1916.5	1944.7	1950.2	1947.5	1940.1
137.5°	2029.3	2052.1	2056.6	2054.8	2043.8
140°	2128.5	2151.2	2164.0	2164.0	2153.9
142.5°	2230.4	2253.1	2260.3	2263.1	2253.1
145°	2326.7	2344.9	2359.5	2362.2	2352.2
147.5°	2413.1	2435.9	2446.8	2451.4	2441.4
150°	2502.3	2517.8	2527.8	2535.9	2527.8
152.5°	2581.4	2596.9	2609.7	2619.7	2609.7
155°	2660.6	2667.9	2676.1	2688.8	2680.5
157.5°	2728.8	2734.3	2738.8	2757.0	2744.3
160°	2789.8	2795.2	2797.9	2813.3	2802.5
162.5°	2846.2	2846.2	2848.8	2866.1	2853.4
165°	2894.3	2891.6	2891.6	2909.8	2897.1
167.5°	2938.0	2929.8	2929.8	2948.1	2935.3
170°	2970.8	2963.5	2960.7	2979.0	2963.5
172.5°	2993.5	2986.2	2983.4	3001.7	2986.2
175°	3011.7	3004.4	2999.0	3017.1	3001.7
177.5°	3021.7	3014.4	3008.9	3024.4	3008.9
180°	3017.1	3017.1	3017.1	3017.1	3017.1

TEST NUMBER: P925462

CATALOG NUMBER: DFN2DIP-SQ3F0-040D100US950-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.63	7.30	7.76	8.42	9.98	2.59	3.26	3.72	4.38	5.94
	3H	8.29	8.89	9.43	10.02	11.59	3.76	4.36	4.90	5.49	7.06
	4H	8.89	9.46	10.03	10.59	12.17	4.19	4.77	5.34	5.90	7.48
	6H	9.30	9.82	10.45	10.95	12.54	4.50	5.03	5.66	6.16	7.75
	8H	9.42	9.92	10.57	11.06	12.65	4.59	5.09	5.74	6.23	7.82
	12H	9.47	9.95	10.63	11.09	12.69	4.62	5.10	5.78	6.24	7.84
4H	2H	6.62	7.20	7.78	8.33	9.91	3.16	3.73	4.32	4.86	6.44
	3H	8.43	8.91	9.59	10.07	11.66	4.49	4.97	5.65	6.12	7.71
	4H	9.12	9.56	10.28	10.70	12.31	5.03	5.47	6.19	6.61	8.22
	6H	9.62	9.99	10.79	11.16	12.76	5.43	5.81	6.60	6.97	8.57
	8H	9.79	10.14	10.95	11.30	12.91	5.55	5.90	6.72	7.06	8.68
	12H	9.87	10.19	11.06	11.36	12.98	5.61	5.92	6.79	7.09	8.71
8H	4H	9.07	9.42	10.24	10.58	12.20	5.29	5.64	6.46	6.80	8.42
	6H	9.62	9.91	10.81	11.11	12.73	5.80	6.09	6.98	7.29	8.90
	8H	9.84	10.09	11.03	11.27	12.90	5.98	6.23	7.17	7.41	9.05
	12H	9.97	10.19	11.16	11.36	13.03	6.09	6.31	7.28	7.48	9.15
12H	4H	9.01	9.33	10.20	10.50	12.12	5.29	5.61	6.47	6.78	8.40
	6H	9.60	9.85	10.79	11.03	12.66	5.84	6.10	7.04	7.27	8.91
	8H	9.81	10.03	11.00	11.21	12.87	6.04	6.26	7.24	7.44	9.10

END OF REPORT