

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925613

Luminaire Tested: DFN2DIP-SQ3F0-080D120US950-FLLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P925613  
REPORT IS A COMBINATION OF REPORTS P901533 AND P898289  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ3F0-080D120US950-FLLONL  
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 18889.2 lumens  
Efficiency: N/A  
Efficacy: 110.9 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 170.3  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9952  
Total Harmonic Distortion (THDi): 0.069  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P925613  
CATALOG NUMBER: DFN2DIP-SQ3F0-080D120US950-FLLONL

### Luminous Intensity Polar Plot

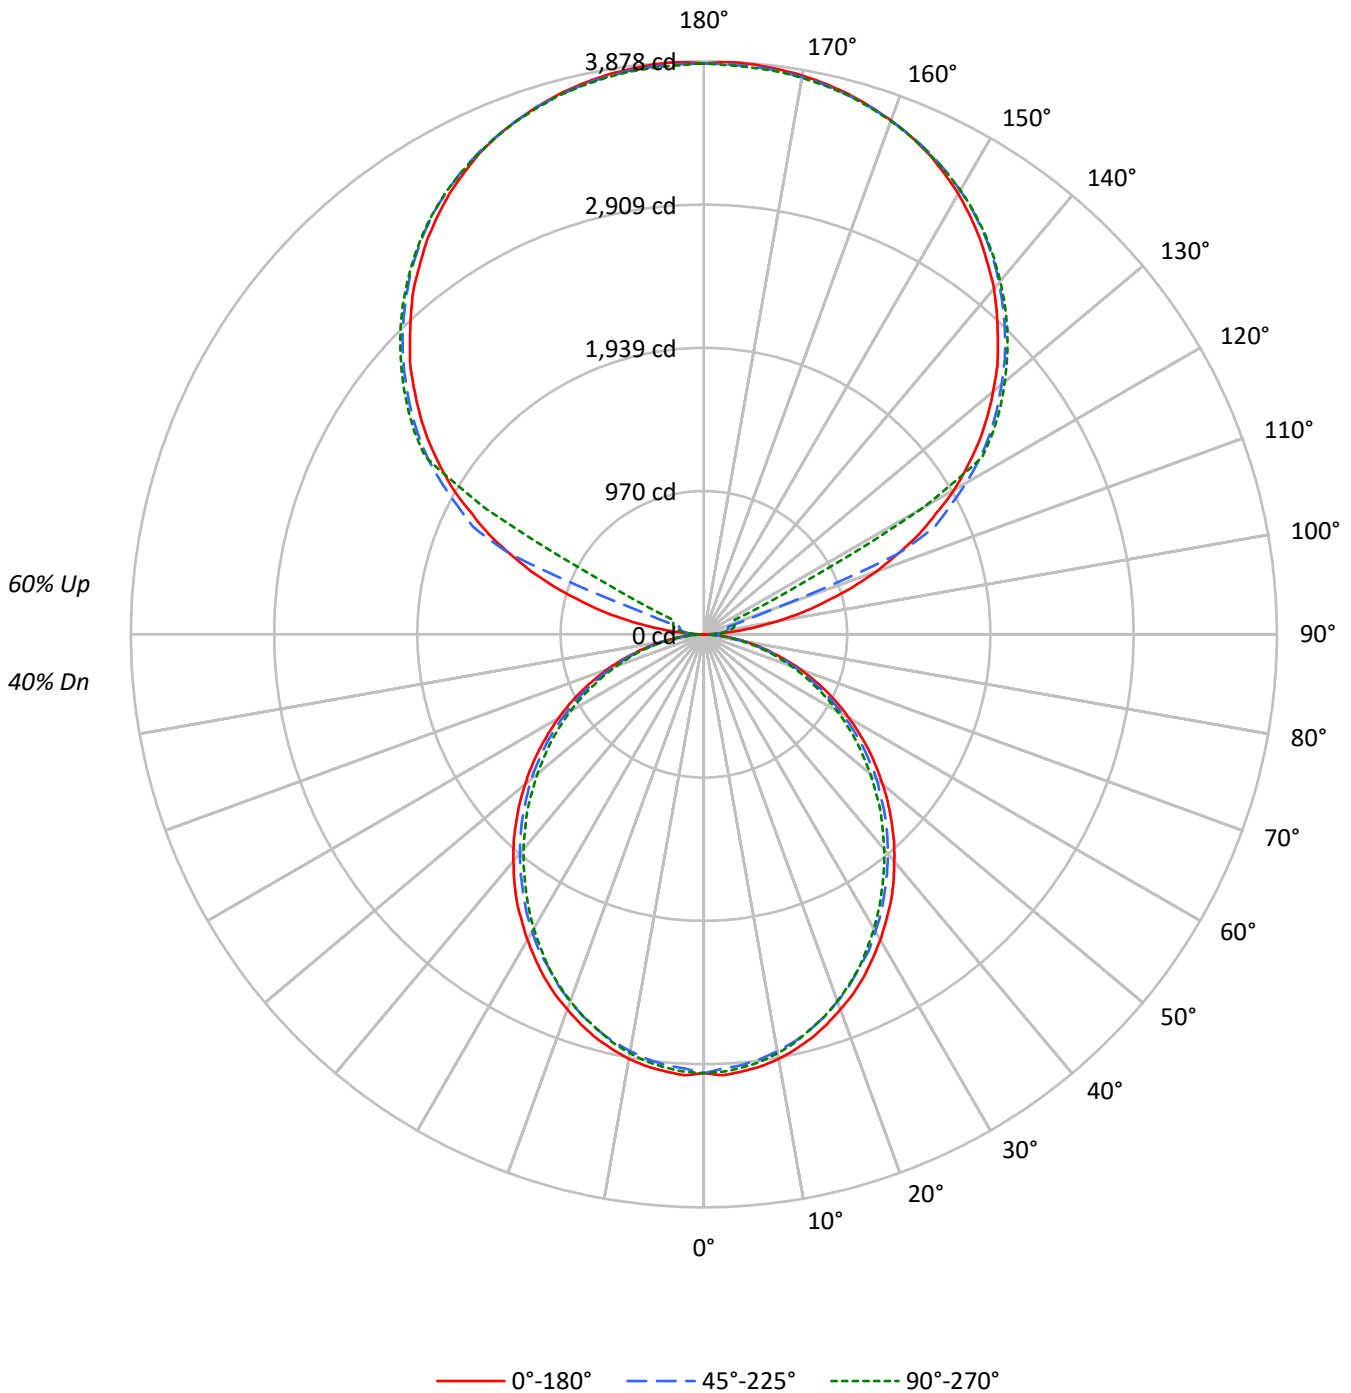



TEST NUMBER: P925613

CATALOG NUMBER: DFN2DIP-SQ3F0-080D120US950-FLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47	47	47	47	40
1	96	91	87	84	87	83	80	77	68	66	64	54	53	51	41	41	40	40	40	40	34
2	87	80	74	69	79	73	68	63	60	56	53	48	45	43	37	35	33	33	33	33	28
3	79	70	63	57	72	64	58	53	53	48	44	42	39	36	32	30	28	28	28	28	24
4	73	62	54	48	66	57	50	45	47	42	38	37	34	31	29	26	24	24	24	24	21
5	67	55	47	41	60	50	44	38	42	37	33	34	30	27	26	23	21	21	21	21	18
6	61	49	41	36	56	45	38	33	38	32	28	30	26	23	24	21	19	19	19	19	16
7	57	45	37	31	51	41	34	29	34	29	25	28	24	21	22	19	17	17	17	17	14
8	52	40	33	27	48	37	30	26	31	26	22	25	21	18	20	17	15	15	15	15	12
9	49	37	29	24	44	34	27	23	28	23	20	23	19	17	18	15	13	13	13	13	11
10	46	34	27	22	41	31	25	20	26	21	18	21	18	15	17	14	12	12	12	12	10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3403	3403	3403
5°	3406	3353	3377
10°	3376	3306	3330
15°	3324	3249	3257
20°	3255	3171	3183
25°	3186	3078	3098
30°	3100	2992	2989
35°	3019	2890	2874
40°	2919	2788	2765
45°	2819	2685	2653
50°	2709	2576	2523
55°	2595	2451	2404
60°	2465	2303	2267
65°	2323	2149	2106
70°	2142	1961	1932
75°	1893	1736	1770
80°	1591	1448	1462
85°	1120	960	958

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2819 cd/sqm



TEST NUMBER: P925613

CATALOG NUMBER: DFN2DIP-SQ3F0-080D120US950-FLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	279.5	1.5
10°-20°	786.4	4.2
20°-30°	1155.7	6.1
30°-40°	1342.3	7.1
40°-50°	1340.6	7.1
50°-60°	1169.0	6.2
60°-70°	864.1	4.6
70°-80°	488.9	2.6
80°-90°	135.8	0.7
90°-100°	127.4	0.7
100°-110°	474.9	2.5
110°-120°	1259.5	6.7
120°-130°	2089.1	11.1
130°-140°	2219.1	11.7
140°-150°	2062.4	10.9
150°-160°	1658.1	8.8
160°-170°	1068.4	5.7
170°-180°	367.7	1.9
0°-30°	2221.6	11.8
0°-40°	3563.9	18.9
0°-60°	6073.6	32.2
0°-90°	7562.5	40.0
90°-120°	1861.9	9.9
90°-150°	8232.4	43.6
90°-180°	11327.0	60.0
0°-180°	18889.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2970	2970	2970	2970	2970	
5°	2970	2958	2927	2950	2944	282
15°	2827	2810	2773	2784	2770	796
25°	2558	2536	2487	2493	2487	1177
35°	2207	2179	2133	2116	2102	1378
45°	1796	1776	1733	1702	1691	1386
55°	1359	1342	1308	1274	1259	1215
65°	917	900	871	845	831	906
75°	480	474	460	443	448	512
85°	117	114	112	103	100	130
90°	3	34	56	70	75	17
95°	182	89	109	123	120	215
105°	850	934	171	201	212	908
115°	1607	1655	1725	430	229	1582
125°	2273	2309	2362	2382	2390	2027
135°	2812	2857	2882	2910	2905	2173
145°	3263	3260	3307	3327	3313	2041
155°	3592	3567	3601	3618	3595	1655
165°	3785	3769	3777	3796	3777	1069
175°	3872	3852	3858	3878	3850	368
180°	3864	3864	3864	3864	3864	



TEST NUMBER: P925613

CATALOG NUMBER: DFN2DIP-SQ3F0-080D120US950-FLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2969.6	2969.6	2969.6	2969.6	2969.6
2.5°	2986.9	2972.7	2941.2	2969.6	2964.2
5°	2969.6	2958.4	2927.0	2949.7	2944.2
7.5°	2949.7	2932.7	2901.2	2924.2	2918.5
10°	2918.5	2898.4	2864.2	2886.9	2878.5
12.5°	2875.5	2858.5	2824.2	2838.4	2832.7
15°	2827.0	2810.0	2772.7	2784.2	2770.0
17.5°	2767.0	2750.0	2712.7	2727.0	2712.7
20°	2701.3	2684.3	2644.3	2652.8	2641.5
22.5°	2635.8	2610.0	2572.7	2572.7	2567.0
25°	2558.5	2535.8	2487.4	2492.8	2487.4
27.5°	2472.8	2452.8	2415.8	2407.3	2393.1
30°	2387.4	2364.3	2321.7	2313.2	2301.6
32.5°	2295.9	2278.9	2233.1	2215.9	2204.4
35°	2207.4	2178.9	2133.1	2115.9	2101.7
37.5°	2107.4	2081.6	2035.9	2015.9	2001.7
40°	2004.7	1981.6	1936.0	1910.5	1898.9
42.5°	1904.8	1881.7	1836.3	1807.4	1790.6
45°	1796.3	1776.3	1733.2	1702.0	1690.6
47.5°	1690.6	1670.5	1624.8	1593.3	1576.3
50°	1579.1	1564.8	1524.8	1484.8	1470.6
52.5°	1470.6	1450.6	1413.6	1382.2	1362.1
55°	1359.4	1342.1	1307.9	1273.7	1259.4
57.5°	1247.9	1233.7	1196.4	1162.2	1150.6
60°	1136.4	1125.2	1085.2	1053.7	1045.2
62.5°	1027.9	1008.0	979.5	951.0	939.5
65°	916.8	899.5	871.0	845.2	831.0
67.5°	802.5	788.0	762.5	742.6	731.1
70°	696.8	685.3	659.6	639.6	628.3
72.5°	588.3	576.9	562.6	542.6	534.1
75°	479.6	474.1	459.6	442.7	448.4
77.5°	382.6	371.1	365.4	356.9	348.4
80°	285.7	282.7	276.9	268.5	262.6
82.5°	194.2	194.2	191.5	179.9	179.9
85°	117.0	114.2	111.5	102.7	100.0
87.5°	51.5	45.8	40.0	31.5	28.5
90°	2.7	33.5	55.8	70.0	75.4
92.5°	70.0	58.8	67.1	72.7	75.4
95°	181.5	89.3	108.9	123.2	120.2
97.5°	327.0	98.0	142.4	151.0	153.7
100°	494.9	111.9	159.3	181.5	187.3
102.5°	679.2	673.9	164.9	195.6	204.2
105°	849.8	933.9	170.7	201.2	212.5
107.5°	1048.4	1118.1	176.3	206.8	218.1
110°	1238.6	1297.1	489.3	209.8	220.8



TEST NUMBER: P925613

CATALOG NUMBER: DFN2DIP-SQ3F0-080D120US950-FLLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1417.5	1467.6	1420.2	215.1	223.7
115°	1607.4	1654.9	1724.9	430.5	229.4
117.5°	1772.4	1828.2	1876.0	1475.9	743.6
120°	1957.0	1998.8	2049.3	2082.9	1705.4
122.5°	2113.4	2158.2	2214.3	2230.9	2233.9
125°	2272.7	2309.3	2362.4	2381.9	2390.2
127.5°	2418.1	2457.3	2499.5	2527.3	2530.0
130°	2555.2	2600.0	2630.6	2661.5	2658.8
132.5°	2695.0	2731.5	2762.0	2787.3	2784.6
135°	2812.5	2857.3	2882.2	2910.5	2904.8
137.5°	2935.4	2968.8	2997.1	3024.9	3016.6
140°	3055.6	3078.1	3108.6	3133.9	3120.0
142.5°	3156.4	3176.1	3212.2	3234.4	3220.5
145°	3262.7	3259.7	3307.1	3326.8	3312.8
147.5°	3354.6	3346.3	3393.9	3407.8	3396.8
150°	3444.2	3424.7	3469.5	3486.1	3472.2
152.5°	3519.6	3497.4	3539.2	3556.1	3536.6
155°	3592.3	3567.4	3601.0	3617.6	3595.3
157.5°	3651.1	3628.8	3654.1	3673.7	3651.1
160°	3701.5	3684.6	3701.5	3718.1	3698.6
162.5°	3746.1	3729.5	3743.4	3763.0	3737.8
165°	3785.2	3768.6	3776.9	3796.5	3776.9
167.5°	3816.1	3799.1	3807.8	3827.4	3802.2
170°	3841.3	3824.4	3830.0	3849.6	3824.4
172.5°	3857.9	3841.3	3847.0	3866.6	3841.3
175°	3871.8	3852.3	3857.9	3877.5	3849.6
177.5°	3877.5	3857.9	3860.9	3880.5	3855.3
180°	3863.6	3863.6	3863.6	3863.6	3863.6



TEST NUMBER: P925613  
 CATALOG NUMBER: DFN2DIP-SQ3F0-080D120US950-FLLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.50	11.27	11.53	12.32	13.72	10.05	10.83	11.09	11.87	13.28
	3H	12.14	12.84	13.19	13.90	15.32	11.65	12.35	12.70	13.41	14.83
	4H	12.73	13.39	13.79	14.44	15.88	12.23	12.89	13.29	13.95	15.38
	6H	13.12	13.73	14.19	14.79	16.23	12.62	13.23	13.69	14.29	15.73
	8H	13.22	13.80	14.29	14.87	16.31	12.72	13.30	13.79	14.37	15.81
	12H	13.26	13.81	14.34	14.88	16.35	12.75	13.30	13.83	14.37	15.84
4H	2H	10.94	11.60	12.01	12.66	14.09	10.59	11.25	11.65	12.30	13.74
	3H	12.80	13.35	13.87	14.43	15.88	12.39	12.94	13.46	14.02	15.47
	4H	13.50	14.01	14.58	15.08	16.55	13.08	13.58	14.16	14.66	16.13
	6H	14.01	14.44	15.10	15.54	17.00	13.58	14.01	14.66	15.11	16.57
	8H	14.15	14.56	15.24	15.65	17.13	13.72	14.12	14.81	15.21	16.69
	12H	14.22	14.59	15.33	15.69	17.17	13.77	14.14	14.88	15.24	16.72
8H	4H	13.69	14.09	14.78	15.18	16.66	13.31	13.72	14.40	14.81	16.28
	6H	14.31	14.65	15.42	15.78	17.25	13.93	14.26	15.04	15.39	16.87
	8H	14.53	14.82	15.64	15.93	17.43	14.13	14.43	15.25	15.54	17.03
	12H	14.65	14.91	15.77	16.02	17.55	14.24	14.50	15.36	15.61	17.14
12H	4H	13.67	14.04	14.77	15.14	16.62	13.30	13.67	14.41	14.77	16.25
	6H	14.34	14.63	15.45	15.74	17.24	13.96	14.26	15.08	15.37	16.87
	8H	14.57	14.83	15.69	15.94	17.47	14.19	14.45	15.31	15.56	17.09