

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925618

Luminaire Tested: DFN2DIP-SQ3F0-090D040US950-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925618
REPORT IS A COMBINATION OF REPORTS P899872 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-090D040US950-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10675.3 lumens
Efficiency: N/A
Efficacy: 90.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 118.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925618

CATALOG NUMBER: DFN2DIP-SQ3F0-090D040US950-RLLFLL

Luminous Intensity Polar Plot

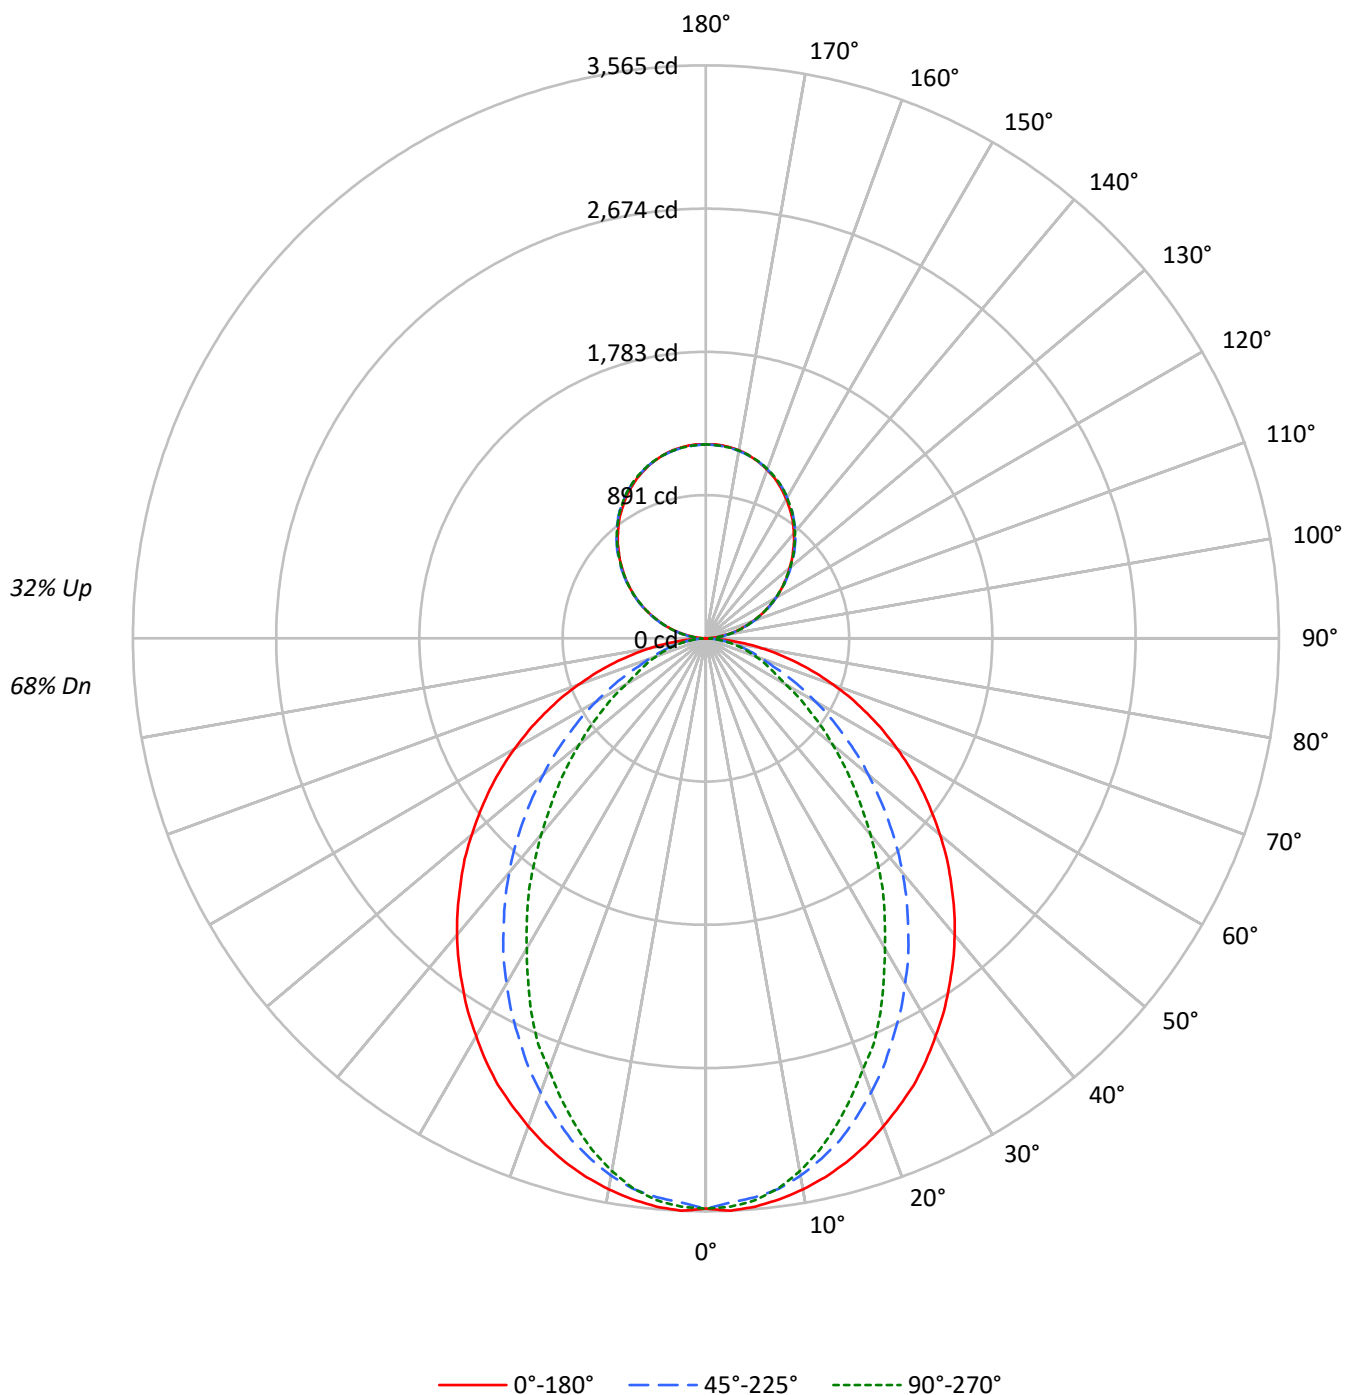

TEST NUMBER: P925618

CATALOG NUMBER: DFN2DIP-SQ3F0-090D040US950-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	112	112	112	112	105	105	105	105	94	94	94	83	83	83	73	73	73
1	103	98	95	91	97	93	90	87	83	81	78	74	72	70	66	64	63
2	94	87	81	76	89	82	77	72	74	70	66	66	63	60	59	56	54
3	86	77	70	64	81	73	67	61	66	61	56	59	55	51	52	49	47
4	79	69	61	55	75	65	58	53	59	53	49	53	48	45	47	44	41
5	73	62	53	48	69	59	51	46	53	47	43	48	43	39	43	39	36
6	68	56	48	42	64	53	46	40	48	42	38	44	39	35	39	35	32
7	63	51	43	37	59	48	41	36	44	38	33	40	35	31	36	32	29
8	58	46	38	33	55	44	37	32	40	34	30	37	32	28	33	29	26
9	55	42	35	30	52	41	34	29	37	31	27	34	29	25	31	27	24
10	51	39	32	27	48	37	31	26	34	29	25	32	27	23	29	25	22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4066	4066	4066
5°	4070	3999	4026
10°	4027	3918	3893
15°	3969	3786	3690
20°	3893	3605	3440
25°	3815	3402	3199
30°	3712	3195	2894
35°	3610	2972	2626
40°	3507	2742	2319
45°	3387	2487	2041
50°	3262	2230	1769
55°	3132	1956	1508
60°	2981	1670	1240
65°	2808	1379	1115
70°	2597	1107	1007
75°	2332	970	913
80°	1948	805	787
85°	1320	525	584

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3387 cd/sqm

TEST NUMBER: P925618

CATALOG NUMBER: DFN2DIP-SQ3F0-090D040US950-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	332.6	3.1
10°-20°	913.0	8.6
20°-30°	1281.8	12.0
30°-40°	1397.3	13.1
40°-50°	1284.2	12.0
50°-60°	1008.6	9.4
60°-70°	656.5	6.1
70°-80°	337.9	3.2
80°-90°	89.7	0.8
90°-100°	74.7	0.7
100°-110°	237.3	2.2
110°-120°	406.1	3.8
120°-130°	534.0	5.0
130°-140°	599.4	5.6
140°-150°	587.8	5.5
150°-160°	493.1	4.6
160°-170°	327.0	3.1
170°-180°	114.3	1.1
0°-30°	2527.4	23.7
0°-40°	3924.6	36.8
0°-60°	6217.4	58.2
0°-90°	7301.6	68.4
90°-120°	718.0	6.7
90°-150°	2439.3	22.9
90°-180°	3374.0	31.6
0°-180°	10675.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3549	3549	3549	3549	3549	
5°	3549	3533	3491	3520	3510	336
15°	3375	3340	3231	3170	3138	951
25°	3064	2961	2749	2617	2569	1409
35°	2640	2476	2194	1991	1920	1652
45°	2158	1943	1606	1378	1300	1667
55°	1641	1390	1044	851	790	1466
65°	1108	848	559	450	440	1099
75°	591	366	257	234	231	625
85°	138	70	61	61	61	158
90°	1	13	36	34	34	10
95°	53	63	65	65	63	59
105°	219	222	224	226	226	231
115°	408	413	412	410	408	403
125°	593	602	599	596	594	530
135°	767	778	780	779	776	593
145°	931	938	944	945	941	582
155°	1064	1067	1070	1076	1072	490
165°	1158	1157	1157	1164	1159	327
175°	1205	1202	1200	1207	1201	114
180°	1207	1207	1207	1207	1207	

TEST NUMBER: P925618

CATALOG NUMBER: DFN2DIP-SQ3F0-090D040US950-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3548.6	3548.6	3548.6	3548.6	3548.6
2.5°	3564.6	3548.6	3513.1	3545.5	3539.1
5°	3548.6	3532.6	3490.7	3519.6	3510.1
7.5°	3519.6	3500.5	3455.6	3468.2	3452.1
10°	3481.1	3458.6	3394.6	3384.7	3365.6
12.5°	3433.1	3404.2	3317.2	3298.2	3262.7
15°	3375.2	3339.8	3230.7	3169.7	3137.7
17.5°	3307.7	3256.3	3121.3	3050.8	2999.4
20°	3230.7	3166.3	3005.8	2925.7	2854.8
22.5°	3147.2	3073.3	2886.9	2777.9	2729.9
25°	3063.8	2960.8	2749.0	2617.4	2569.0
27.5°	2964.3	2854.8	2620.4	2469.5	2395.6
30°	2858.3	2736.0	2479.1	2315.5	2228.6
32.5°	2755.3	2607.5	2344.5	2151.7	2071.2
35°	2639.9	2476.0	2193.5	1991.2	1920.3
37.5°	2527.4	2350.7	2052.1	1830.3	1750.3
40°	2408.6	2216.0	1904.3	1676.4	1592.9
42.5°	2286.5	2081.2	1756.7	1519.0	1438.8
45°	2158.1	1942.8	1605.8	1377.5	1300.5
47.5°	2036.1	1808.2	1461.3	1233.0	1162.5
50°	1901.2	1673.2	1320.0	1098.1	1031.0
52.5°	1769.4	1528.5	1185.1	973.1	912.1
55°	1640.9	1390.5	1043.6	851.2	790.1
57.5°	1509.4	1252.5	918.6	738.7	687.3
60°	1374.4	1117.5	786.8	623.2	571.7
62.5°	1243.0	986.1	674.3	520.3	494.7
65°	1108.0	847.7	558.8	449.7	439.9
67.5°	979.6	719.2	449.7	394.9	385.3
70°	844.7	594.2	372.4	340.4	327.4
72.5°	716.2	478.3	311.4	285.8	279.4
75°	590.8	366.0	256.9	234.4	231.3
77.5°	465.7	260.0	202.3	189.5	183.0
80°	349.9	186.4	154.0	141.4	141.4
82.5°	243.9	125.4	106.0	99.5	99.5
85°	137.9	70.5	61.0	61.0	61.0
87.5°	51.4	25.6	25.6	22.5	22.5
90°	1.0	13.1	35.7	33.5	34.5
92.5°	22.5	30.5	31.7	32.7	32.7
95°	53.1	63.3	65.2	65.2	63.3
97.5°	88.4	97.9	101.9	101.9	101.9
100°	129.2	137.6	140.4	140.4	139.4
102.5°	172.1	178.3	182.3	183.4	182.3
105°	219.0	221.9	224.1	225.9	225.9
107.5°	265.6	270.0	270.0	270.6	265.6
110°	310.7	316.5	316.5	316.5	313.7

TEST NUMBER: P925618

CATALOG NUMBER: DFN2DIP-SQ3F0-090D040US950-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	359.5	365.7	364.5	361.7	359.5
115°	407.5	413.4	411.5	410.4	407.5
117.5°	455.2	463.2	458.1	455.2	452.3
120°	503.2	511.2	503.2	503.2	499.9
122.5°	546.8	557.0	552.0	549.0	546.8
125°	592.7	601.8	598.9	595.6	594.5
127.5°	637.5	648.7	644.7	640.3	637.5
130°	679.2	692.4	690.6	688.4	684.4
132.5°	726.2	736.4	737.2	732.0	729.1
135°	766.6	777.9	780.1	778.9	776.1
137.5°	811.8	820.8	822.6	821.9	817.6
140°	851.3	860.5	865.6	865.6	861.6
142.5°	892.2	901.2	904.1	905.3	901.2
145°	930.7	938.0	943.8	944.9	940.9
147.5°	965.3	974.3	978.7	980.5	976.5
150°	1000.9	1007.1	1011.1	1014.4	1011.1
152.5°	1032.6	1038.7	1043.9	1047.9	1043.9
155°	1064.2	1067.1	1070.4	1075.5	1072.2
157.5°	1091.6	1093.7	1095.5	1102.8	1097.7
160°	1115.9	1118.1	1119.1	1125.3	1121.0
162.5°	1138.4	1138.4	1139.6	1146.4	1141.4
165°	1157.8	1156.6	1156.6	1163.9	1158.8
167.5°	1175.2	1171.9	1171.9	1179.2	1174.1
170°	1188.3	1185.3	1184.3	1191.5	1185.3
172.5°	1197.4	1194.5	1193.4	1200.7	1194.5
175°	1204.7	1201.8	1199.6	1206.8	1200.7
177.5°	1208.7	1205.8	1203.6	1209.8	1203.6
180°	1206.8	1206.8	1206.8	1206.8	1206.8

TEST NUMBER: P925618

CATALOG NUMBER: DFN2DIP-SQ3F0-090D040US950-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.55	14.56	14.34	15.37	16.35	9.51	10.52	10.30	11.33	12.31
	3H	15.24	16.14	16.04	16.96	17.97	10.71	11.61	11.51	12.43	13.44
	4H	15.85	16.70	16.67	17.53	18.55	11.16	12.01	11.98	12.84	13.86
	6H	16.28	17.06	17.11	17.89	18.93	11.49	12.27	12.32	13.10	14.14
	8H	16.41	17.15	17.25	18.00	19.04	11.58	12.32	12.42	13.17	14.21
	12H	16.47	17.18	17.32	18.03	19.09	11.63	12.33	12.47	13.18	14.24
4H	2H	13.59	14.44	14.41	15.26	16.29	10.13	10.98	10.95	11.80	12.83
	3H	15.43	16.14	16.27	16.99	18.03	11.49	12.19	12.32	13.05	14.09
	4H	16.13	16.77	16.97	17.62	18.69	12.04	12.68	12.88	13.53	14.60
	6H	16.65	17.20	17.51	18.08	19.15	12.46	13.01	13.32	13.89	14.96
	8H	16.82	17.34	17.69	18.21	19.30	12.59	13.10	13.45	13.98	15.06
	12H	16.92	17.39	17.81	18.28	19.37	12.66	13.12	13.54	14.01	15.10
8H	4H	16.10	16.62	16.97	17.50	18.58	12.33	12.84	13.19	13.72	14.80
	6H	16.67	17.10	17.57	18.01	19.10	12.84	13.27	13.74	14.19	15.27
	8H	16.89	17.26	17.79	18.17	19.28	13.03	13.41	13.93	14.32	15.42
	12H	17.03	17.36	17.94	18.26	19.42	13.15	13.48	14.06	14.39	15.54
12H	4H	16.06	16.53	16.95	17.42	18.51	12.34	12.80	13.22	13.70	14.79
	6H	16.65	17.03	17.55	17.94	19.04	12.89	13.27	13.80	14.18	15.28
	8H	16.87	17.21	17.78	18.11	19.26	13.10	13.44	14.01	14.34	15.49