

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925698

Luminaire Tested: DFN2DIP-SQ3F0-110D060US950-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925698
REPORT IS A COMBINATION OF REPORTS P899912 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-110D060US950-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13985.7 lumens
Efficiency: N/A
Efficacy: 89.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 157
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925698

CATALOG NUMBER: DFN2DIP-SQ3F0-110D060US950-RLLFLL

Luminous Intensity Polar Plot

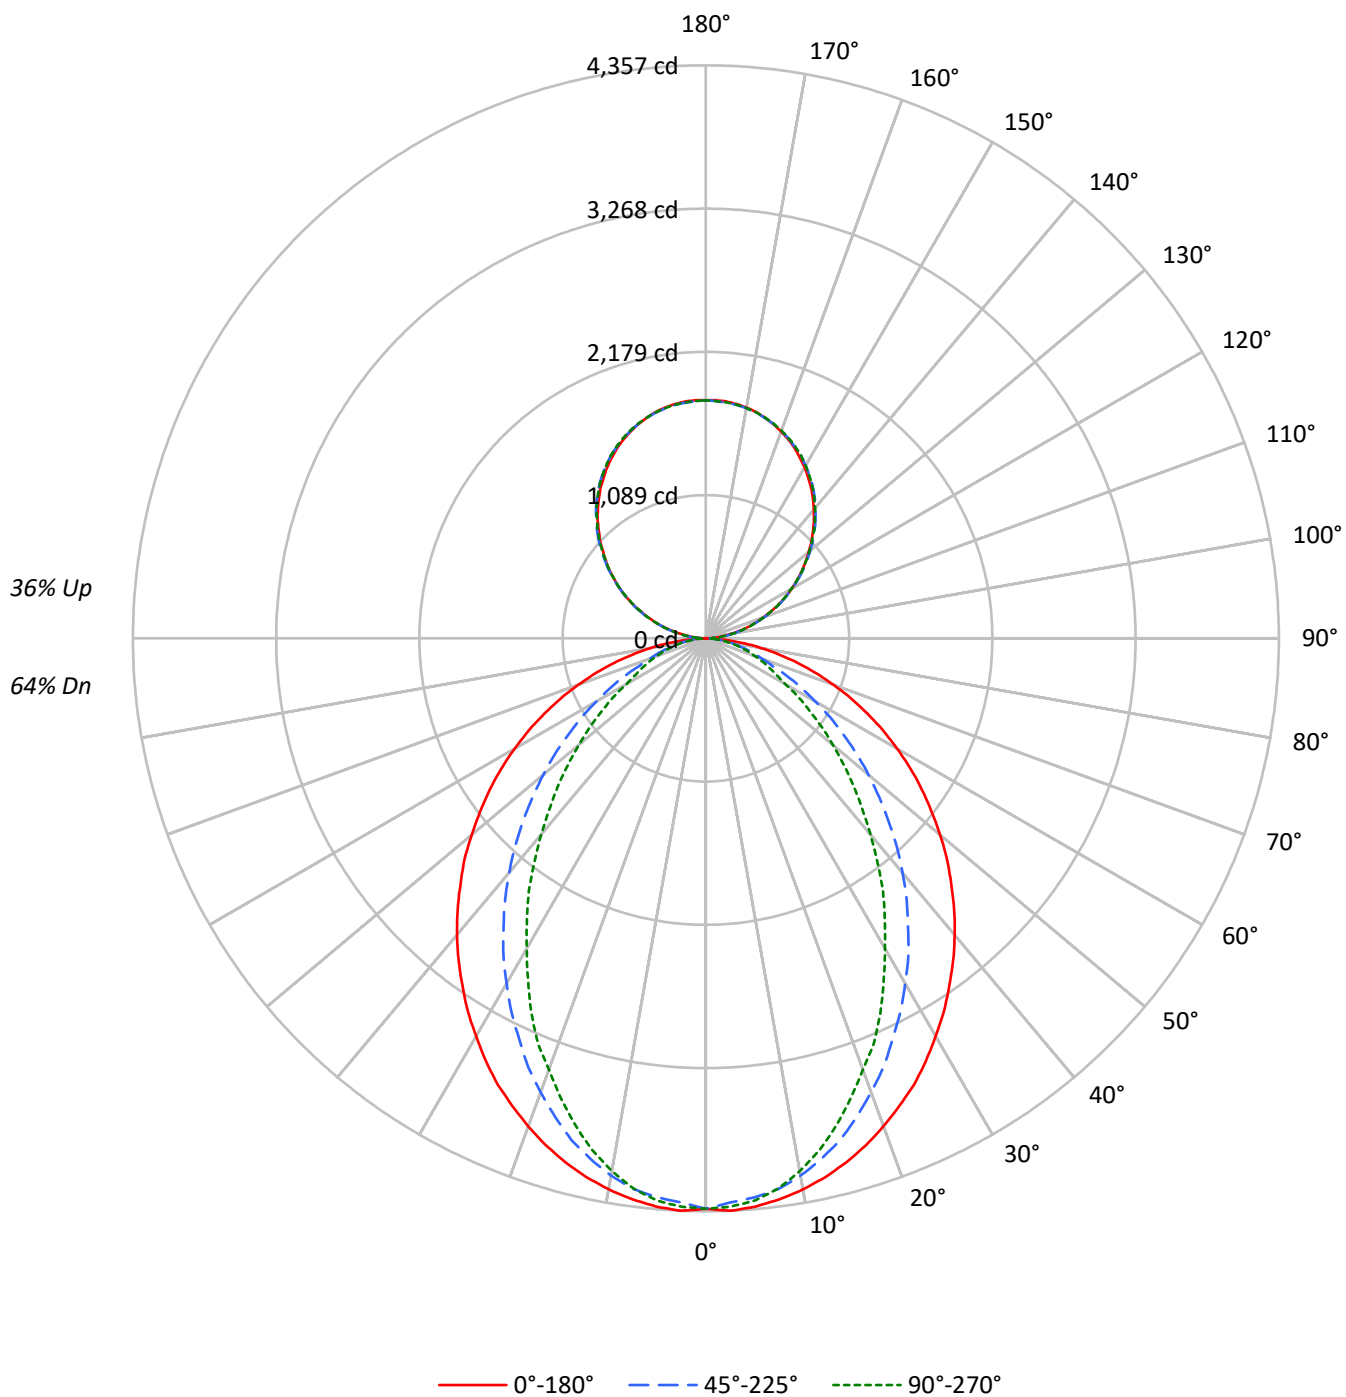

TEST NUMBER: P925698

CATALOG NUMBER: DFN2DIP-SQ3F0-110D060US950-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	104	104	104	104	91	91	91	79	79	79	69	69	69
1	101	97	94	90	95	92	88	85	81	78	76	71	69	67	62	61	59
2	93	86	80	75	87	81	76	71	72	68	64	63	60	57	55	53	51
3	85	76	69	63	80	72	65	60	64	59	55	56	52	49	49	47	44
4	78	68	60	54	73	64	57	52	57	52	47	51	46	43	45	41	39
5	72	61	53	47	68	58	50	45	51	46	41	46	41	38	40	37	34
6	67	55	47	41	63	52	45	39	47	41	36	42	37	33	37	33	30
7	62	50	42	36	58	47	40	35	43	37	32	38	33	30	34	30	27
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	27	25
9	54	42	34	29	51	40	33	28	36	30	26	32	28	24	29	25	22
10	50	38	31	26	48	37	30	26	33	28	24	30	25	22	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4970	4970	4970
5°	4974	4887	4920
10°	4922	4788	4759
15°	4851	4627	4510
20°	4758	4406	4205
25°	4663	4158	3910
30°	4537	3905	3537
35°	4412	3633	3210
40°	4286	3352	2834
45°	4139	3040	2494
50°	3987	2726	2162
55°	3828	2390	1843
60°	3644	2040	1516
65°	3431	1685	1362
70°	3174	1353	1230
75°	2850	1186	1116
80°	2381	984	963
85°	1615	641	713

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4139 cd/sqm

TEST NUMBER: P925698

CATALOG NUMBER: DFN2DIP-SQ3F0-110D060US950-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	406.5	2.9
10°-20°	1115.9	8.0
20°-30°	1566.7	11.2
30°-40°	1707.7	12.2
40°-50°	1569.6	11.2
50°-60°	1232.7	8.8
60°-70°	802.4	5.7
70°-80°	413.0	3.0
80°-90°	110.6	0.8
90°-100°	112.0	0.8
100°-110°	355.9	2.5
110°-120°	609.1	4.4
120°-130°	801.1	5.7
130°-140°	899.2	6.4
140°-150°	881.7	6.3
150°-160°	739.6	5.3
160°-170°	490.5	3.5
170°-180°	171.4	1.2
0°-30°	3089.0	22.1
0°-40°	4796.8	34.3
0°-60°	7599.1	54.3
0°-90°	8925.1	63.8
90°-120°	1077.0	7.7
90°-150°	3659.0	26.2
90°-180°	5061.0	36.2
0°-180°	13985.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4337	4337	4337	4337	4337	
5°	4337	4318	4266	4302	4290	411
15°	4125	4082	3949	3874	3835	1162
25°	3744	3619	3360	3199	3140	1722
35°	3226	3026	2681	2434	2347	2019
45°	2638	2374	1963	1684	1590	2037
55°	2006	1700	1276	1040	966	1792
65°	1354	1036	683	550	538	1343
75°	722	447	314	286	283	764
85°	169	86	74	74	74	194
90°	2	20	54	50	52	14
95°	80	95	98	98	95	89
105°	329	333	336	339	339	347
115°	611	620	617	616	611	605
125°	889	903	898	893	892	794
135°	1150	1167	1170	1168	1164	889
145°	1396	1407	1416	1417	1411	872
155°	1596	1601	1606	1613	1608	735
165°	1737	1735	1735	1746	1738	490
175°	1807	1803	1799	1810	1801	172
180°	1810	1810	1810	1810	1810	

TEST NUMBER: P925698

CATALOG NUMBER: DFN2DIP-SQ3F0-110D060US950-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4337.2	4337.2	4337.2	4337.2	4337.2
2.5°	4356.7	4337.2	4293.9	4333.4	4325.5
5°	4337.2	4317.6	4266.4	4301.8	4290.1
7.5°	4301.8	4278.4	4223.5	4238.9	4219.3
10°	4254.7	4227.2	4148.9	4136.8	4113.6
12.5°	4196.0	4160.6	4054.4	4031.0	3987.7
15°	4125.2	4081.9	3948.6	3874.1	3834.9
17.5°	4042.8	3979.9	3815.0	3728.7	3665.8
20°	3948.6	3869.9	3673.8	3575.9	3489.3
22.5°	3846.6	3756.2	3528.5	3395.2	3336.4
25°	3744.5	3618.8	3359.8	3199.0	3139.9
27.5°	3623.0	3489.3	3202.8	3018.3	2927.9
30°	3493.5	3344.0	3030.0	2830.0	2723.9
32.5°	3367.7	3186.9	2865.4	2629.8	2531.5
35°	3226.5	3026.2	2681.0	2433.7	2347.0
37.5°	3089.1	2873.0	2508.2	2237.0	2139.2
40°	2943.8	2708.5	2327.5	2048.8	1946.8
42.5°	2794.6	2543.6	2147.2	1856.5	1758.6
45°	2637.7	2374.5	1962.7	1683.6	1589.6
47.5°	2488.6	2210.0	1786.1	1507.0	1420.9
50°	2323.7	2045.1	1613.3	1342.2	1260.1
52.5°	2162.5	1868.1	1448.4	1189.4	1114.7
55°	2005.5	1699.5	1275.5	1040.2	965.7
57.5°	1844.8	1530.8	1122.7	902.9	839.9
60°	1679.9	1365.9	961.5	761.7	698.8
62.5°	1519.1	1205.2	824.2	635.9	604.6
65°	1354.2	1036.0	683.0	549.7	537.6
67.5°	1197.3	879.1	549.7	482.6	471.0
70°	1032.3	726.3	455.2	416.0	400.2
72.5°	875.3	584.7	380.6	349.4	341.4
75°	722.1	447.2	314.0	286.5	282.8
77.5°	569.3	317.8	247.4	231.5	223.6
80°	427.7	227.8	188.2	172.9	172.9
82.5°	298.1	153.2	129.6	121.6	121.6
85°	168.7	86.2	74.5	74.5	74.5
87.5°	62.9	31.2	31.2	27.5	27.5
90°	1.6	19.7	53.5	50.2	51.8
92.5°	33.9	45.9	47.5	49.1	49.1
95°	79.7	94.9	97.7	97.7	94.9
97.5°	132.6	146.8	152.8	152.8	152.8
100°	193.8	206.3	210.6	210.6	209.0
102.5°	258.2	267.4	273.4	275.0	273.4
105°	328.6	332.9	336.2	339.0	339.0
107.5°	398.4	405.0	405.0	406.0	398.4
110°	466.1	474.8	474.8	474.8	470.4

TEST NUMBER: P925698

CATALOG NUMBER: DFN2DIP-SQ3F0-110D060US950-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	539.2	548.5	546.8	542.4	539.2
115°	611.2	620.0	617.2	615.6	611.2
117.5°	682.8	694.8	687.1	682.8	678.4
120°	754.8	766.8	754.8	754.8	749.8
122.5°	820.2	835.5	827.9	823.6	820.2
125°	889.0	902.7	898.3	893.4	891.8
127.5°	956.2	973.1	967.1	960.6	956.2
130°	1019.0	1038.6	1035.9	1032.6	1026.6
132.5°	1089.4	1104.6	1105.7	1098.1	1093.7
135°	1150.0	1166.8	1170.1	1168.5	1164.1
137.5°	1217.6	1231.2	1234.0	1232.9	1226.4
140°	1277.1	1290.8	1298.4	1298.4	1292.4
142.5°	1338.2	1351.8	1356.2	1357.8	1351.8
145°	1396.1	1407.0	1415.7	1417.4	1411.3
147.5°	1447.9	1461.5	1468.1	1470.8	1464.8
150°	1501.4	1510.7	1516.7	1521.5	1516.7
152.5°	1548.8	1558.2	1565.8	1571.8	1565.8
155°	1596.3	1600.7	1605.6	1613.3	1608.3
157.5°	1637.3	1640.6	1643.3	1654.2	1646.6
160°	1673.9	1677.1	1678.8	1688.0	1681.5
162.5°	1707.7	1707.7	1709.3	1719.7	1712.0
165°	1736.6	1734.9	1734.9	1745.9	1738.3
167.5°	1762.8	1757.9	1757.9	1768.8	1761.2
170°	1782.5	1778.1	1776.4	1787.3	1778.1
172.5°	1796.1	1791.7	1790.1	1801.0	1791.7
175°	1807.0	1802.7	1799.3	1810.3	1801.0
177.5°	1813.0	1808.7	1805.3	1814.6	1805.3
180°	1810.3	1810.3	1810.3	1810.3	1810.3

TEST NUMBER: P925698

CATALOG NUMBER: DFN2DIP-SQ3F0-110D060US950-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.88	14.84	14.72	15.69	16.76	9.84	10.80	10.68	11.66	12.72
	3H	15.57	16.42	16.42	17.29	18.38	11.04	11.89	11.89	12.76	13.85
	4H	16.18	16.99	17.04	17.85	18.96	11.49	12.30	12.35	13.17	14.27
	6H	16.60	17.35	17.48	18.22	19.34	11.81	12.55	12.69	13.43	14.54
	8H	16.73	17.44	17.62	18.33	19.44	11.90	12.61	12.79	13.50	14.62
	12H	16.79	17.47	17.68	18.36	19.49	11.95	12.62	12.84	13.51	14.64
4H	2H	13.92	14.72	14.79	15.59	16.69	10.45	11.26	11.32	12.13	13.23
	3H	15.75	16.42	16.63	17.32	18.44	11.81	12.48	12.69	13.38	14.50
	4H	16.44	17.05	17.34	17.95	19.10	12.35	12.97	13.25	13.86	15.01
	6H	16.96	17.49	17.87	18.41	19.55	12.77	13.30	13.68	14.22	15.37
	8H	17.14	17.63	18.05	18.54	19.70	12.90	13.39	13.81	14.31	15.47
	12H	17.23	17.68	18.16	18.61	19.77	12.97	13.41	13.90	14.35	15.51
8H	4H	16.42	16.91	17.33	17.83	18.98	12.64	13.13	13.55	14.05	15.21
	6H	16.99	17.39	17.92	18.35	19.51	13.16	13.56	14.09	14.52	15.68
	8H	17.20	17.56	18.15	18.51	19.68	13.34	13.70	14.29	14.65	15.83
	12H	17.34	17.66	18.29	18.60	19.82	13.46	13.78	14.41	14.72	15.94
12H	4H	16.38	16.82	17.31	17.75	18.92	12.65	13.09	13.58	14.03	15.19
	6H	16.96	17.32	17.91	18.27	19.44	13.20	13.56	14.15	14.51	15.69
	8H	17.18	17.50	18.13	18.44	19.67	13.41	13.73	14.36	14.67	15.90