

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903986

Luminaire Tested: DFN2DIP-SQ4F0-070D090US830-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903986
REPORT IS A COMBINATION OF REPORTS P900116 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-070D090US830-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13115.4 lumens
Efficiency: N/A
Efficacy: 102.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 128
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903986

CATALOG NUMBER: DFN2DIP-SQ4F0-070D090US830-RLLFLL

Luminous Intensity Polar Plot

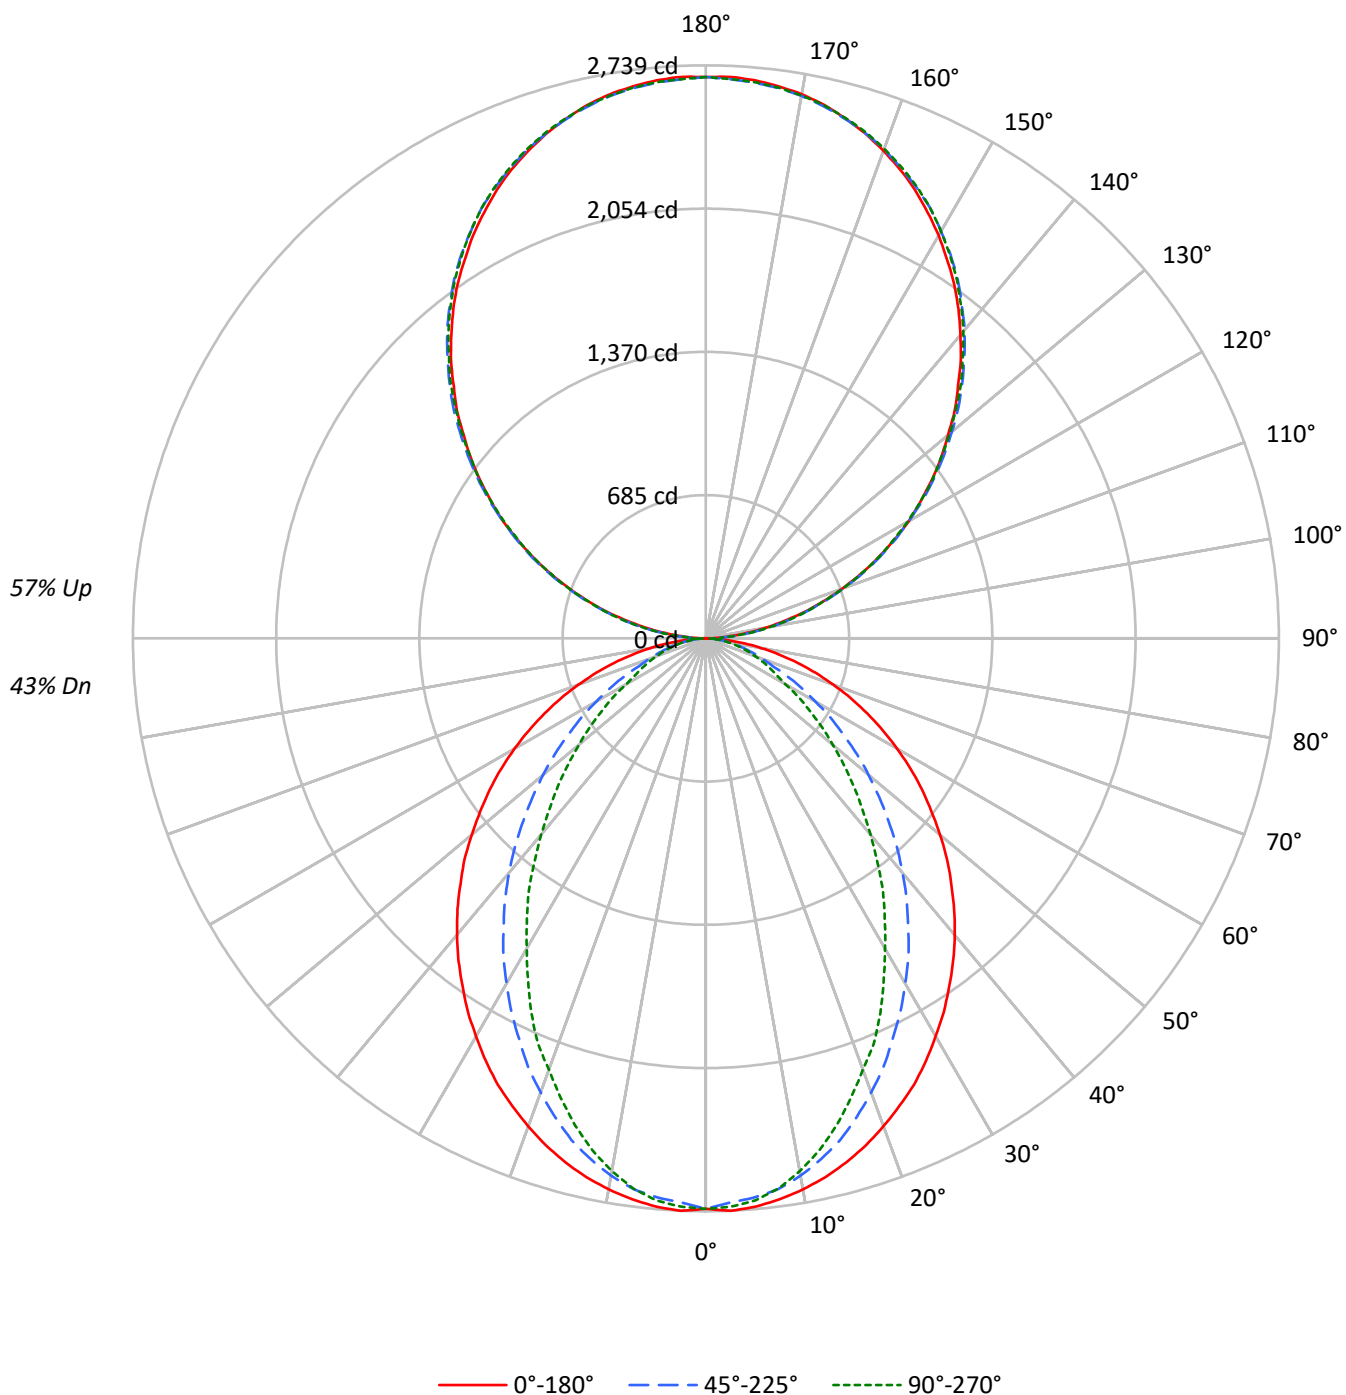

TEST NUMBER: P903986

CATALOG NUMBER: DFN2DIP-SQ4F0-070D090US830-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50
1	97	92	89	85	88	85	82	79	70	68	66	57	55	54	44	43	43
2	88	81	75	70	80	74	69	65	62	58	55	50	48	46	40	38	36
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	35	33	32
4	74	64	56	50	68	59	52	47	49	44	40	40	37	34	32	30	28
5	68	57	49	43	62	52	46	41	44	39	35	36	32	30	29	26	24
6	63	51	43	38	57	47	40	35	40	35	31	33	29	26	26	24	22
7	58	46	39	33	53	43	36	31	36	31	27	30	26	23	24	21	19
8	54	42	35	29	49	39	32	28	33	28	24	28	24	21	22	19	17
9	50	38	31	26	46	36	29	25	30	25	22	25	22	19	21	18	16
10	47	35	28	24	43	33	27	22	28	23	20	23	20	17	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1913	1913	1913
5°	1916	1883	1896
10°	1897	1847	1834
15°	1871	1786	1740
20°	1837	1702	1623
25°	1801	1608	1510
30°	1754	1512	1367
35°	1707	1408	1242
40°	1660	1301	1098
45°	1605	1182	967
50°	1548	1062	839
55°	1488	933	717
60°	1419	798	590
65°	1340	662	532
70°	1244	534	482
75°	1124	472	440
80°	949	397	384
85°	661	267	292

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2111 cd/sqm

TEST NUMBER: P903986

CATALOG NUMBER: DFN2DIP-SQ4F0-070D090US830-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	255.6	1.9
10°-20°	701.6	5.3
20°-30°	985.0	7.5
30°-40°	1073.7	8.2
40°-50°	986.9	7.5
50°-60°	775.0	5.9
60°-70°	504.5	3.8
70°-80°	259.7	2.0
80°-90°	73.9	0.6
90°-100°	166.0	1.3
100°-110°	527.5	4.0
110°-120°	902.7	6.9
120°-130°	1187.2	9.1
130°-140°	1332.5	10.2
140°-150°	1306.7	10.0
150°-160°	1096.1	8.4
160°-170°	726.9	5.5
170°-180°	254.1	1.9
0°-30°	1942.1	14.8
0°-40°	3015.8	23.0
0°-60°	4777.7	36.4
0°-90°	5615.7	42.8
90°-120°	1596.2	12.2
90°-150°	5422.6	41.3
90°-180°	7500.0	57.2
0°-180°	13115.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2727	2727	2727	2727	2727	
5°	2727	2714	2682	2705	2697	259
15°	2594	2566	2483	2436	2411	731
25°	2354	2275	2112	2011	1974	1083
35°	2028	1903	1686	1530	1476	1270
45°	1658	1493	1234	1059	999	1281
55°	1261	1068	802	654	607	1127
65°	851	651	429	346	338	844
75°	454	281	197	180	178	480
85°	106	54	47	47	47	122
90°	2	29	79	74	77	13
95°	118	141	145	145	141	131
105°	487	493	498	502	502	514
115°	906	919	915	912	906	896
125°	1318	1338	1331	1324	1322	1177
135°	1704	1729	1734	1732	1725	1317
145°	2069	2085	2098	2100	2092	1293
155°	2366	2372	2380	2391	2384	1089
165°	2574	2571	2571	2587	2576	726
175°	2678	2671	2667	2683	2669	254
180°	2683	2683	2683	2683	2683	

TEST NUMBER: P903986

CATALOG NUMBER: DFN2DIP-SQ4F0-070D090US830-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2726.9	2726.9	2726.9	2726.9	2726.9
2.5°	2739.1	2726.9	2699.6	2724.5	2719.5
5°	2726.9	2714.5	2682.4	2704.6	2697.3
7.5°	2704.6	2689.9	2655.4	2665.0	2652.8
10°	2675.0	2657.8	2608.5	2600.9	2586.2
12.5°	2638.1	2615.8	2549.1	2534.4	2507.2
15°	2593.6	2566.4	2482.6	2435.7	2411.1
17.5°	2541.8	2502.3	2398.6	2344.3	2304.8
20°	2482.6	2433.1	2309.8	2248.2	2193.8
22.5°	2418.5	2361.6	2218.4	2134.6	2097.7
25°	2354.3	2275.2	2112.3	2011.3	1974.2
27.5°	2277.8	2193.8	2013.6	1897.7	1840.9
30°	2196.4	2102.4	1905.0	1779.3	1712.6
32.5°	2117.3	2003.8	1801.6	1653.4	1591.6
35°	2028.5	1902.6	1685.6	1530.1	1475.6
37.5°	1942.2	1806.3	1577.0	1406.5	1345.0
40°	1850.8	1702.9	1463.3	1288.2	1224.0
42.5°	1757.1	1599.2	1349.9	1167.2	1105.7
45°	1658.4	1492.9	1234.0	1058.6	999.4
47.5°	1564.6	1389.5	1122.9	947.5	893.3
50°	1460.9	1285.8	1014.3	843.9	792.3
52.5°	1359.6	1174.5	910.6	747.7	700.9
55°	1260.9	1068.5	801.9	654.0	607.2
57.5°	1159.9	962.4	705.9	567.6	528.1
60°	1056.2	858.8	604.5	478.9	439.3
62.5°	955.1	757.7	518.1	399.8	380.1
65°	851.4	651.4	429.4	345.6	338.0
67.5°	752.7	552.7	345.6	303.4	296.1
70°	649.0	456.6	286.2	261.6	251.6
72.5°	550.4	367.6	239.3	219.7	214.7
75°	454.0	281.2	197.4	180.1	177.8
77.5°	357.9	199.7	155.5	145.5	140.6
80°	268.9	143.2	118.4	108.7	108.7
82.5°	187.5	96.3	81.4	76.4	76.4
85°	106.0	54.2	46.8	46.8	46.8
87.5°	39.5	19.6	19.6	17.2	17.2
90°	2.5	29.1	79.3	74.4	76.8
92.5°	50.1	68.0	70.4	72.8	72.8
95°	118.1	140.7	144.8	144.8	140.7
97.5°	196.5	217.5	226.5	226.5	226.5
100°	287.1	305.8	312.2	312.2	309.8
102.5°	382.6	396.3	405.2	407.6	405.2
105°	486.9	493.3	498.2	502.3	502.3
107.5°	590.4	600.1	600.1	601.7	590.4
110°	690.7	703.7	703.7	703.7	697.2

TEST NUMBER: P903986

CATALOG NUMBER: DFN2DIP-SQ4F0-070D090US830-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	799.1	812.8	810.4	804.0	799.1
115°	905.9	918.8	914.7	912.4	905.9
117.5°	1011.8	1029.6	1018.3	1011.8	1005.3
120°	1118.6	1136.3	1118.6	1118.6	1111.3
122.5°	1215.6	1238.3	1227.0	1220.5	1215.6
125°	1317.6	1337.8	1331.3	1324.0	1321.6
127.5°	1417.0	1442.1	1433.2	1423.5	1417.0
130°	1510.0	1539.2	1535.1	1530.2	1521.4
132.5°	1614.4	1637.0	1638.6	1627.3	1620.9
135°	1704.1	1729.2	1734.1	1731.6	1725.2
137.5°	1804.4	1824.7	1828.7	1827.1	1817.4
140°	1892.6	1912.8	1924.1	1924.1	1915.2
142.5°	1983.2	2003.4	2009.9	2012.3	2003.4
145°	2069.0	2085.1	2098.0	2100.5	2091.6
147.5°	2145.8	2166.0	2175.7	2179.7	2170.9
150°	2225.1	2238.8	2247.7	2254.9	2247.7
152.5°	2295.4	2309.1	2320.4	2329.4	2320.4
155°	2365.8	2372.2	2379.5	2390.9	2383.6
157.5°	2426.4	2431.3	2435.3	2451.5	2440.1
160°	2480.6	2485.5	2487.9	2501.6	2491.9
162.5°	2530.7	2530.7	2533.2	2548.5	2537.2
165°	2573.6	2571.2	2571.2	2587.4	2576.1
167.5°	2612.4	2605.2	2605.2	2621.3	2610.0
170°	2641.6	2635.1	2632.7	2648.8	2635.1
172.5°	2661.7	2655.3	2652.9	2669.1	2655.3
175°	2678.0	2671.4	2666.6	2682.9	2669.1
177.5°	2686.8	2680.4	2675.5	2689.3	2675.5
180°	2682.9	2682.9	2682.9	2682.9	2682.9

TEST NUMBER: P903986

CATALOG NUMBER: DFN2DIP-SQ4F0-070D090US830-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.70	9.48	9.72	10.50	11.88	4.66	5.44	5.69	6.46	7.84
	3H	10.38	11.07	11.41	12.11	13.50	5.85	6.54	6.88	7.58	8.97
	4H	10.99	11.64	12.03	12.68	14.08	6.30	6.95	7.34	7.99	9.39
	6H	11.41	12.01	12.47	13.06	14.47	6.62	7.22	7.67	8.26	9.67
	8H	11.54	12.11	12.60	13.17	14.58	6.70	7.28	7.76	8.34	9.74
	12H	11.60	12.15	12.66	13.20	14.63	6.75	7.29	7.81	8.34	9.77
4H	2H	8.71	9.37	9.77	10.41	11.81	5.25	5.91	6.31	6.95	8.35
	3H	10.54	11.09	11.60	12.15	13.57	6.60	7.15	7.66	8.21	9.62
	4H	11.24	11.74	12.30	12.79	14.23	7.15	7.65	8.21	8.70	10.14
	6H	11.75	12.18	12.83	13.26	14.69	7.56	7.99	8.64	9.07	10.50
	8H	11.93	12.33	13.00	13.40	14.85	7.69	8.09	8.77	9.16	10.61
	12H	12.02	12.39	13.12	13.47	14.92	7.75	8.12	8.85	9.20	10.65
8H	4H	11.20	11.60	12.27	12.67	14.12	7.43	7.83	8.50	8.90	10.34
	6H	11.77	12.10	12.87	13.21	14.66	7.94	8.27	9.04	9.39	10.83
	8H	11.99	12.28	13.09	13.37	14.84	8.13	8.42	9.24	9.52	10.98
	12H	12.13	12.38	13.23	13.47	14.98	8.25	8.51	9.36	9.60	11.10
12H	4H	11.15	11.51	12.24	12.60	14.05	7.43	7.79	8.52	8.88	10.33
	6H	11.74	12.03	12.85	13.13	14.59	7.99	8.28	9.10	9.38	10.84
	8H	11.97	12.22	13.07	13.31	14.81	8.20	8.46	9.31	9.55	11.05