

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904055

Luminaire Tested: DFN2DIP-SQ4F0-090D080US830-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904055
REPORT IS A COMBINATION OF REPORTS P901622 AND P898471
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-090D080US830-RLLONL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 14675.4 lumens
Efficiency: N/A
Efficacy: 103.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 142.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.983
Total Harmonic Distortion (THDi): 0.073
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904055
CATALOG NUMBER: DFN2DIP-SQ4F0-090D080US830-RLLONL

Luminous Intensity Polar Plot

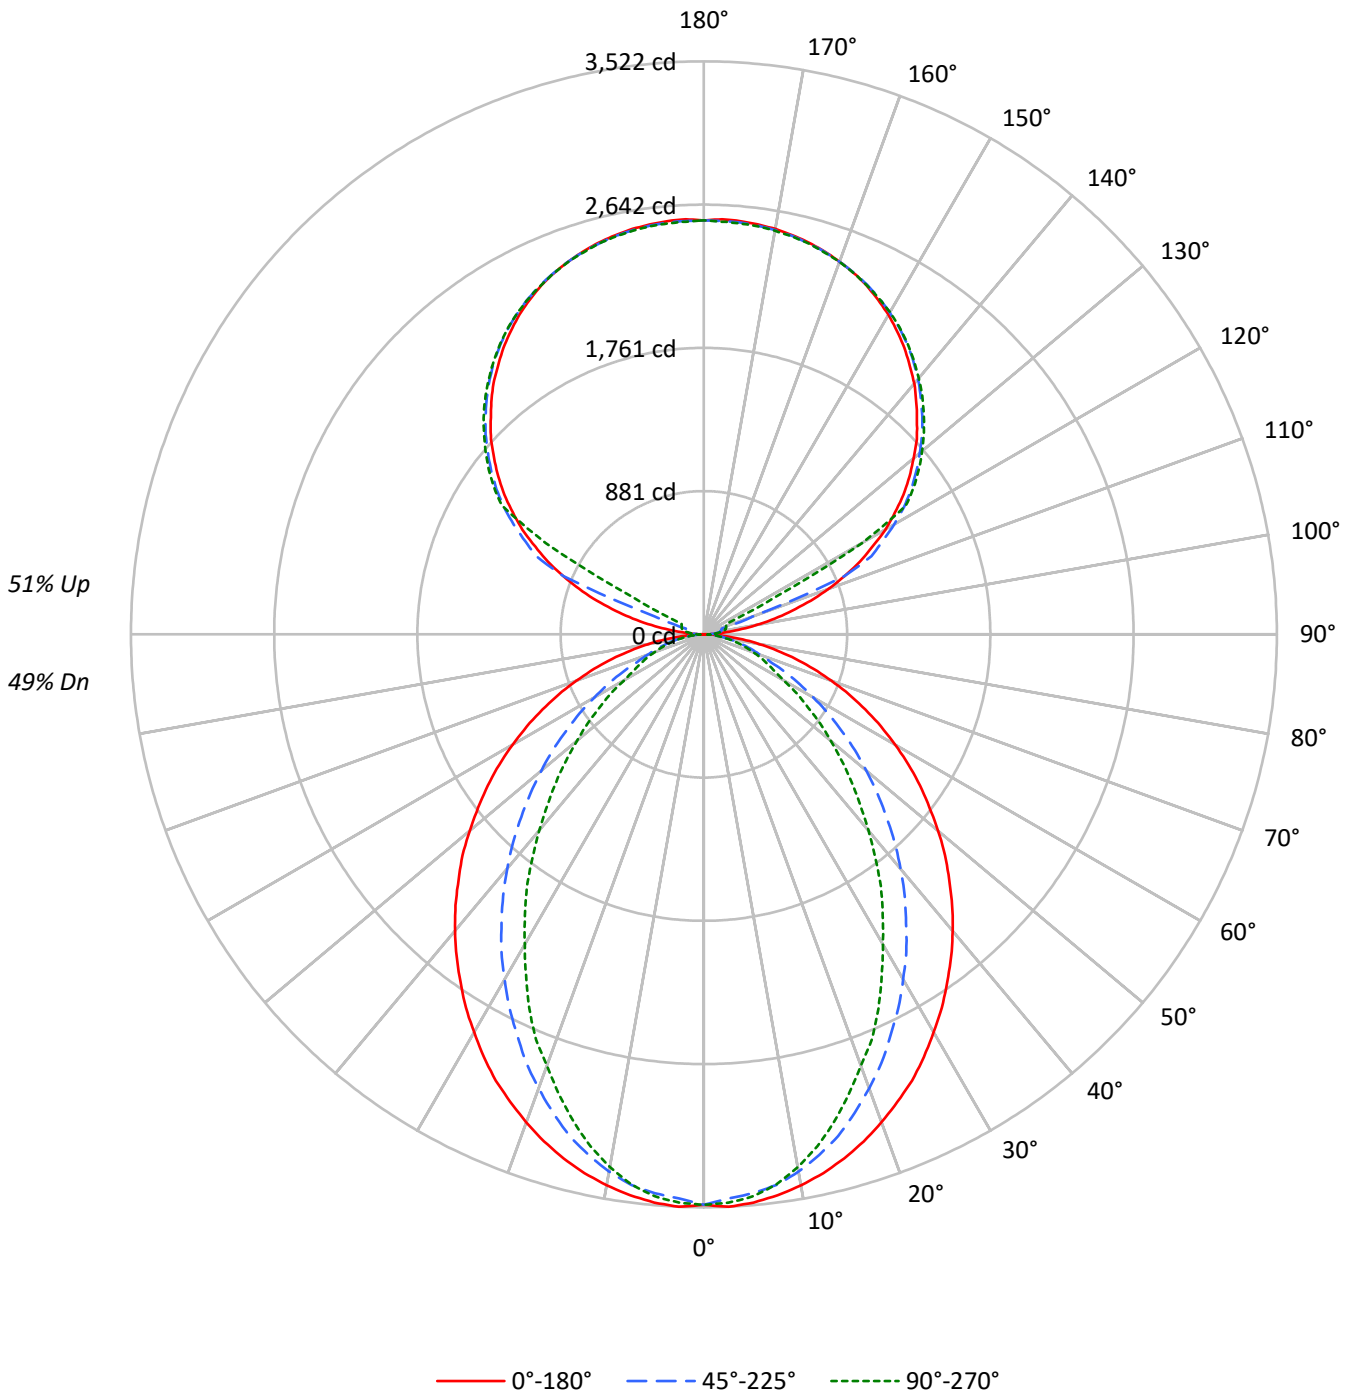



TEST NUMBER: P904055
 CATALOG NUMBER: DFN2DIP-SQ4F0-090D080US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	55	55	55	49				49
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48	42				42
2	90	83	77	72	82	76	71	67	65	61	58	54	52	49	44	42	41	36				36
3	82	73	66	60	75	68	62	57	58	53	49	48	45	42	40	37	35	31				31
4	75	65	57	51	69	60	54	48	51	46	42	43	40	37	36	33	31	27				27
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	30	27	24				24
6	64	52	44	39	59	49	42	37	42	36	32	36	31	28	30	27	24	21				21
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22	19				19
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20	17				17
9	51	39	32	27	47	37	30	26	32	27	23	28	23	20	23	20	18	16				16
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16	14				14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2460	2460	2460
5°	2464	2422	2437
10°	2440	2374	2359
15°	2406	2296	2237
20°	2361	2189	2087
25°	2316	2068	1942
30°	2255	1944	1758
35°	2195	1811	1597
40°	2134	1673	1411
45°	2063	1519	1243
50°	1990	1365	1079
55°	1913	1199	921
60°	1825	1027	759
65°	1723	851	684
70°	1600	687	620
75°	1445	606	566
80°	1220	510	493
85°	849	343	375

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2063 cd/sqm



TEST NUMBER: P904055

CATALOG NUMBER: DFN2DIP-SQ4F0-090D080US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	328.6	2.2
10°-20°	902.0	6.1
20°-30°	1266.4	8.6
30°-40°	1380.5	9.4
40°-50°	1268.8	8.6
50°-60°	996.5	6.8
60°-70°	648.6	4.4
70°-80°	333.9	2.3
80°-90°	89.7	0.6
90°-100°	83.9	0.6
100°-110°	312.8	2.1
110°-120°	829.6	5.7
120°-130°	1376.0	9.4
130°-140°	1461.6	10.0
140°-150°	1358.4	9.3
150°-160°	1092.1	7.4
160°-170°	703.7	4.8
170°-180°	242.2	1.7
0°-30°	2497.0	17.0
0°-40°	3877.5	26.4
0°-60°	6142.8	41.9
0°-90°	7214.9	49.2
90°-120°	1226.4	8.4
90°-150°	5422.4	36.9
90°-180°	7460.0	50.8
0°-180°	14675.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3506	3506	3506	3506	3506	
5°	3506	3490	3449	3477	3468	332
15°	3335	3300	3192	3132	3100	940
25°	3027	2925	2716	2586	2538	1392
35°	2608	2446	2167	1967	1897	1632
45°	2132	1920	1586	1361	1285	1647
55°	1621	1374	1031	841	781	1449
65°	1095	838	552	444	435	1085
75°	584	362	254	232	229	617
85°	136	70	60	60	60	156
90°	2	22	37	46	50	14
95°	120	59	72	81	79	142
105°	560	615	112	132	140	598
115°	1059	1090	1136	284	151	1042
125°	1497	1521	1556	1569	1574	1335
135°	1852	1882	1898	1917	1913	1431
145°	2149	2147	2178	2191	2182	1344
155°	2366	2350	2372	2383	2368	1090
165°	2493	2482	2488	2501	2488	704
175°	2550	2537	2541	2554	2536	243
180°	2545	2545	2545	2545	2545	



TEST NUMBER: P904055
 CATALOG NUMBER: DFN2DIP-SQ4F0-090D080US830-RLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3506.0	3506.0	3506.0	3506.0	3506.0
2.5°	3521.8	3506.0	3470.9	3503.0	3496.5
5°	3506.0	3490.1	3448.8	3477.3	3467.9
7.5°	3477.3	3458.5	3414.1	3426.5	3410.7
10°	3439.3	3417.1	3353.8	3344.0	3325.2
12.5°	3391.8	3363.3	3277.4	3258.6	3223.5
15°	3334.6	3299.7	3191.9	3131.6	3100.0
17.5°	3268.0	3217.2	3083.8	3014.2	2963.4
20°	3191.9	3128.3	2969.7	2890.6	2820.6
22.5°	3109.4	3036.4	2852.2	2744.5	2697.1
25°	3027.0	2925.3	2715.9	2586.0	2538.2
27.5°	2928.7	2820.6	2589.0	2439.9	2366.8
30°	2824.0	2703.1	2449.3	2287.7	2201.9
32.5°	2722.3	2576.2	2316.3	2125.8	2046.4
35°	2608.2	2446.3	2167.2	1967.3	1897.2
37.5°	2497.1	2322.4	2027.5	1808.4	1729.3
40°	2379.6	2189.4	1881.4	1656.2	1573.8
42.5°	2259.1	2056.2	1735.6	1500.7	1421.5
45°	2132.2	1919.5	1586.5	1360.9	1284.9
47.5°	2011.7	1786.5	1443.8	1218.2	1148.6
50°	1878.4	1653.1	1304.1	1085.0	1018.6
52.5°	1748.1	1510.1	1170.8	961.4	901.2
55°	1621.2	1373.8	1031.0	840.9	780.6
57.5°	1491.3	1237.5	907.6	729.8	679.0
60°	1357.9	1104.1	777.3	615.7	564.9
62.5°	1228.0	974.2	666.2	514.1	488.8
65°	1094.7	837.5	552.0	444.3	434.6
67.5°	967.8	710.6	444.3	390.1	380.7
70°	834.5	587.1	368.0	336.3	323.5
72.5°	707.6	472.6	307.6	282.4	276.1
75°	583.7	361.6	253.8	231.6	228.6
77.5°	460.1	256.8	199.9	187.2	180.8
80°	345.7	184.2	152.1	139.7	139.7
82.5°	241.0	123.9	104.7	98.3	98.3
85°	136.3	69.7	60.2	60.2	60.2
87.5°	50.8	25.3	25.3	22.2	22.2
90°	1.8	22.1	36.8	46.1	49.7
92.5°	46.1	38.7	44.2	47.9	49.7
95°	119.6	58.8	71.7	81.2	79.2
97.5°	215.4	64.5	93.8	99.5	101.2
100°	326.0	73.7	105.0	119.6	123.3
102.5°	447.4	443.8	108.7	128.8	134.5
105°	559.8	615.1	112.4	132.5	140.0
107.5°	690.5	736.4	116.1	136.2	143.6
110°	815.9	854.3	322.3	138.2	145.4



TEST NUMBER: P904055

CATALOG NUMBER: DFN2DIP-SQ4F0-090D080US830-RLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	933.7	966.7	935.5	141.7	147.4
115°	1058.8	1090.1	1136.1	283.6	151.1
117.5°	1167.4	1204.2	1235.7	972.1	489.8
120°	1289.0	1316.5	1349.8	1371.9	1123.2
122.5°	1391.9	1421.5	1458.5	1469.4	1471.4
125°	1496.9	1521.0	1555.9	1568.9	1574.3
127.5°	1592.7	1618.5	1646.3	1664.6	1666.4
130°	1683.0	1712.5	1732.7	1753.0	1751.2
132.5°	1775.1	1799.1	1819.3	1835.9	1834.1
135°	1852.5	1882.0	1898.4	1917.0	1913.3
137.5°	1933.4	1955.5	1974.1	1992.4	1987.0
140°	2012.5	2027.4	2047.6	2064.2	2054.9
142.5°	2079.1	2091.9	2115.7	2130.4	2121.2
145°	2149.0	2147.0	2178.3	2191.2	2182.0
147.5°	2209.6	2204.1	2235.3	2244.6	2237.3
150°	2268.6	2255.7	2285.2	2296.1	2287.0
152.5°	2318.3	2303.6	2331.1	2342.3	2329.4
155°	2366.2	2349.8	2371.8	2382.7	2368.1
157.5°	2404.8	2390.2	2406.8	2419.7	2404.8
160°	2438.1	2427.0	2438.1	2449.0	2436.1
162.5°	2467.4	2456.5	2465.6	2478.5	2461.9
165°	2493.2	2482.3	2487.7	2500.6	2487.7
167.5°	2513.5	2502.4	2508.0	2520.9	2504.3
170°	2530.2	2518.9	2522.7	2535.6	2518.9
172.5°	2541.1	2530.2	2533.8	2546.7	2530.2
175°	2550.2	2537.3	2541.1	2553.9	2535.6
177.5°	2553.9	2541.1	2543.0	2555.9	2539.3
180°	2544.8	2544.8	2544.8	2544.8	2544.8



TEST NUMBER: P904055
 CATALOG NUMBER: DFN2DIP-SQ4F0-090D080US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.21	11.03	11.18	12.01	13.30	6.17	6.99	7.14	7.97	9.26
	3H	11.89	12.63	12.87	13.62	14.92	7.36	8.09	8.34	9.08	10.39
	4H	12.50	13.20	13.50	14.19	15.51	7.81	8.50	8.80	9.50	10.81
	6H	12.93	13.57	13.93	14.56	15.89	8.13	8.77	9.14	9.77	11.10
	8H	13.05	13.66	14.07	14.68	16.00	8.22	8.83	9.23	9.84	11.17
	12H	13.12	13.70	14.13	14.71	16.05	8.26	8.84	9.28	9.85	11.20
4H	2H	10.23	10.92	11.23	11.92	13.23	6.77	7.46	7.77	8.46	9.77
	3H	12.06	12.64	13.07	13.66	14.99	8.12	8.69	9.13	9.72	11.05
	4H	12.75	13.28	13.77	14.30	15.65	8.66	9.19	9.68	10.21	11.56
	6H	13.27	13.73	14.30	14.77	16.12	9.08	9.54	10.11	10.58	11.93
	8H	13.45	13.88	14.48	14.91	16.27	9.21	9.64	10.24	10.67	12.03
	12H	13.55	13.93	14.60	14.98	16.35	9.28	9.66	10.33	10.71	12.08
8H	4H	12.72	13.15	13.75	14.18	15.54	8.95	9.37	9.98	10.40	11.77
	6H	13.29	13.64	14.35	14.72	16.08	9.47	9.82	10.52	10.89	12.25
	8H	13.51	13.82	14.57	14.88	16.26	9.66	9.97	10.72	11.02	12.41
	12H	13.65	13.92	14.72	14.98	16.40	9.78	10.05	10.84	11.10	12.53
12H	4H	12.67	13.06	13.72	14.10	15.47	8.95	9.33	10.00	10.38	11.75
	6H	13.27	13.58	14.33	14.63	16.02	9.52	9.82	10.58	10.88	12.26
	8H	13.49	13.76	14.56	14.81	16.24	9.73	10.00	10.79	11.05	12.48