

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904090

Luminaire Tested: DFN2DIP-SQ4F0-100D080US830-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904090
REPORT IS A COMBINATION OF REPORTS P900104 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-100D080US830-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14684.8 lumens
Efficiency: N/A
Efficacy: 96.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 152.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904090

CATALOG NUMBER: DFN2DIP-SQ4F0-100D080US830-RLLFLL

Luminous Intensity Polar Plot

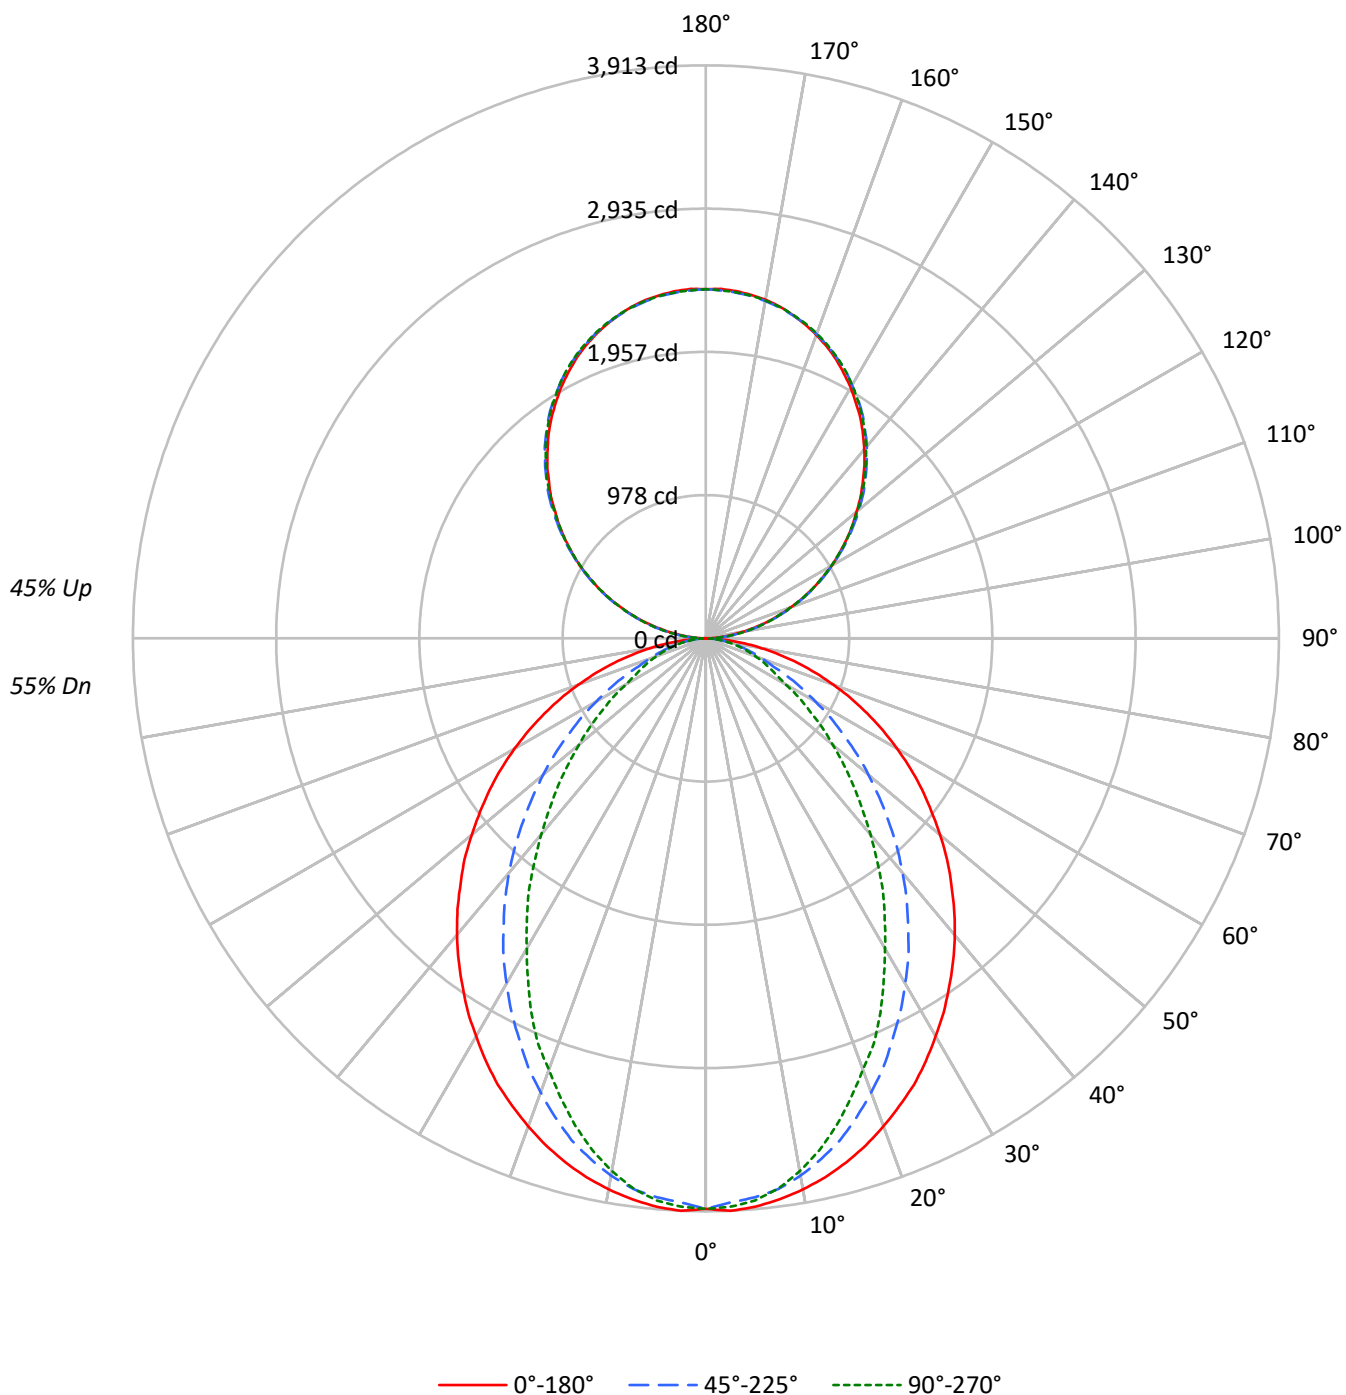

TEST NUMBER: P904090

CATALOG NUMBER: DFN2DIP-SQ4F0-100D080US830-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	54	53	52
2	91	84	78	73	84	78	73	69	67	63	60	57	55	52	48	46	45
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	43	41	39
4	76	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34
5	70	59	51	45	65	55	48	43	48	43	38	42	37	34	35	32	30
6	65	53	45	40	60	50	43	38	44	38	34	38	33	30	32	29	26
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24
8	56	44	36	31	52	41	34	30	36	31	27	32	27	24	27	24	21
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	25	22	19
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2733	2733	2733
5°	2738	2691	2708
10°	2711	2638	2621
15°	2673	2552	2485
20°	2624	2432	2319
25°	2573	2298	2158
30°	2505	2160	1954
35°	2439	2012	1774
40°	2371	1859	1568
45°	2292	1688	1381
50°	2211	1516	1199
55°	2126	1333	1024
60°	2028	1141	843
65°	1915	945	760
70°	1778	763	689
75°	1605	674	628
80°	1356	567	548
85°	944	381	417

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2292 cd/sqm

TEST NUMBER: P904090

CATALOG NUMBER: DFN2DIP-SQ4F0-100D080US830-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	365.1	2.5
10°-20°	1002.2	6.8
20°-30°	1407.1	9.6
30°-40°	1533.9	10.4
40°-50°	1409.8	9.6
50°-60°	1107.2	7.5
60°-70°	720.7	4.9
70°-80°	371.0	2.5
80°-90°	101.5	0.7
90°-100°	147.6	1.0
100°-110°	468.9	3.2
110°-120°	802.4	5.5
120°-130°	1055.3	7.2
130°-140°	1184.5	8.1
140°-150°	1161.5	7.9
150°-160°	974.4	6.6
160°-170°	646.2	4.4
170°-180°	225.9	1.5
0°-30°	2774.5	18.9
0°-40°	4308.3	29.3
0°-60°	6825.3	46.5
0°-90°	8018.4	54.6
90°-120°	1418.8	9.7
90°-150°	4820.1	32.8
90°-180°	6666.0	45.4
0°-180°	14684.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3896	3896	3896	3896	3896	
5°	3896	3878	3832	3864	3853	369
15°	3705	3666	3546	3480	3444	1044
25°	3363	3250	3018	2873	2820	1547
35°	2898	2718	2408	2186	2108	1814
45°	2369	2133	1763	1512	1428	1830
55°	1801	1526	1146	934	867	1610
65°	1216	931	613	494	483	1206
75°	649	402	282	257	254	686
85°	152	77	67	67	67	174
90°	2	26	70	66	68	14
95°	105	125	129	129	125	117
105°	433	439	443	446	446	457
115°	805	817	813	811	805	796
125°	1171	1189	1183	1177	1175	1047
135°	1515	1537	1541	1539	1534	1171
145°	1839	1853	1865	1867	1859	1149
155°	2103	2109	2115	2125	2119	968
165°	2288	2286	2286	2300	2290	645
175°	2380	2375	2370	2385	2372	226
180°	2385	2385	2385	2385	2385	

TEST NUMBER: P904090

CATALOG NUMBER: DFN2DIP-SQ4F0-100D080US830-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3895.5	3895.5	3895.5	3895.5	3895.5
2.5°	3913.1	3895.5	3856.6	3892.1	3885.1
5°	3895.5	3877.9	3831.9	3863.8	3853.2
7.5°	3863.8	3842.7	3793.4	3807.2	3789.7
10°	3821.4	3796.7	3726.4	3715.6	3694.7
12.5°	3768.8	3736.9	3641.5	3620.6	3581.7
15°	3705.1	3666.2	3546.5	3479.6	3444.4
17.5°	3631.0	3574.6	3426.5	3349.0	3292.6
20°	3546.5	3475.8	3299.7	3211.8	3134.0
22.5°	3454.9	3373.7	3169.1	3049.5	2996.7
25°	3363.3	3250.4	3017.6	2873.2	2820.2
27.5°	3254.0	3134.0	2876.6	2710.9	2629.8
30°	3137.7	3003.4	2721.4	2541.9	2446.6
32.5°	3024.8	2862.4	2573.7	2362.0	2273.7
35°	2897.9	2718.1	2408.0	2185.8	2108.0
37.5°	2774.6	2580.4	2252.8	2009.3	1921.4
40°	2644.0	2432.7	2090.5	1840.2	1748.6
42.5°	2510.1	2284.5	1928.5	1667.5	1579.5
45°	2369.1	2132.7	1762.8	1512.2	1427.7
47.5°	2235.2	1985.0	1604.2	1353.6	1276.2
50°	2087.1	1836.8	1449.0	1205.5	1131.8
52.5°	1942.3	1677.9	1300.9	1068.2	1001.3
55°	1801.3	1526.4	1145.7	934.3	867.3
57.5°	1657.0	1374.9	1008.4	810.9	754.4
60°	1508.8	1226.8	863.7	684.1	627.6
62.5°	1364.4	1082.4	740.2	571.2	543.1
65°	1216.4	930.6	613.4	493.7	482.9
67.5°	1075.3	789.6	493.7	433.5	423.0
70°	927.2	652.3	408.8	373.6	359.5
72.5°	786.2	525.1	341.9	313.8	306.7
75°	648.6	401.7	282.0	257.3	253.9
77.5°	511.3	285.4	222.2	207.9	200.9
80°	384.1	204.6	169.1	155.2	155.2
82.5°	267.8	137.6	116.3	109.2	109.2
85°	151.5	77.4	66.9	66.9	66.9
87.5°	56.5	28.1	28.1	24.7	24.7
90°	2.2	25.9	70.5	66.2	68.3
92.5°	44.6	60.4	62.6	64.7	64.7
95°	105.0	125.1	128.7	128.7	125.1
97.5°	174.7	193.4	201.3	201.3	201.3
100°	255.2	271.7	277.5	277.5	275.3
102.5°	340.1	352.3	360.1	362.3	360.1
105°	432.8	438.6	442.9	446.5	446.5
107.5°	524.8	533.5	533.5	534.9	524.8
110°	614.0	625.5	625.5	625.5	619.7

TEST NUMBER: P904090

CATALOG NUMBER: DFN2DIP-SQ4F0-100D080US830-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	710.3	722.6	720.4	714.6	710.3
115°	805.2	816.7	813.1	811.0	805.2
117.5°	899.4	915.2	905.1	899.4	893.6
120°	994.3	1010.1	994.3	994.3	987.8
122.5°	1080.5	1100.7	1090.6	1084.9	1080.5
125°	1171.1	1189.1	1183.4	1176.9	1174.8
127.5°	1259.6	1281.9	1273.9	1265.4	1259.6
130°	1342.3	1368.1	1364.5	1360.3	1352.4
132.5°	1435.0	1455.1	1456.6	1446.5	1440.8
135°	1514.8	1537.1	1541.4	1539.3	1533.5
137.5°	1603.9	1621.9	1625.5	1624.1	1615.4
140°	1682.3	1700.3	1710.3	1710.3	1702.4
142.5°	1762.8	1780.8	1786.6	1788.8	1780.8
145°	1839.1	1853.4	1864.9	1867.1	1859.2
147.5°	1907.3	1925.3	1933.9	1937.6	1929.7
150°	1977.8	1990.0	1997.9	2004.4	1997.9
152.5°	2040.3	2052.6	2062.7	2070.6	2062.7
155°	2102.9	2108.7	2115.2	2125.2	2118.7
157.5°	2156.8	2161.2	2164.7	2179.1	2169.1
160°	2205.0	2209.3	2211.5	2223.6	2215.1
162.5°	2249.6	2249.6	2251.7	2265.4	2255.3
165°	2287.6	2285.5	2285.5	2299.9	2289.8
167.5°	2322.1	2315.7	2315.7	2330.1	2320.0
170°	2348.1	2342.3	2340.1	2354.6	2342.3
172.5°	2366.1	2360.3	2358.1	2372.5	2360.3
175°	2380.4	2374.6	2370.3	2384.7	2372.5
177.5°	2388.3	2382.6	2378.2	2390.5	2378.2
180°	2384.7	2384.7	2384.7	2384.7	2384.7

TEST NUMBER: P904090

CATALOG NUMBER: DFN2DIP-SQ4F0-100D080US830-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.07	11.94	12.00	12.88	14.08	7.03	7.90	7.96	8.84	10.05
	3H	12.76	13.53	13.69	14.48	15.71	8.22	9.00	9.16	9.95	11.18
	4H	13.37	14.10	14.32	15.06	16.30	8.68	9.41	9.63	10.36	11.60
	6H	13.80	14.47	14.76	15.43	16.68	9.00	9.68	9.96	10.63	11.89
	8H	13.93	14.57	14.89	15.54	16.79	9.09	9.74	10.06	10.71	11.96
	12H	13.99	14.60	14.96	15.57	16.84	9.14	9.75	10.11	10.72	11.99
4H	2H	11.09	11.83	12.05	12.78	14.02	7.64	8.37	8.59	9.32	10.56
	3H	12.93	13.54	13.90	14.52	15.78	8.99	9.60	9.95	10.58	11.83
	4H	13.63	14.19	14.60	15.16	16.44	9.54	10.10	10.51	11.07	12.35
	6H	14.15	14.63	15.14	15.63	16.91	9.96	10.44	10.95	11.44	12.72
	8H	14.33	14.78	15.32	15.77	17.06	10.09	10.54	11.08	11.53	12.82
	12H	14.43	14.83	15.44	15.84	17.14	10.16	10.56	11.17	11.57	12.87
8H	4H	13.60	14.05	14.59	15.04	16.33	9.83	10.27	10.81	11.26	12.56
	6H	14.17	14.54	15.19	15.58	16.86	10.35	10.72	11.36	11.75	13.04
	8H	14.39	14.72	15.41	15.74	17.05	10.54	10.86	11.56	11.88	13.19
	12H	14.54	14.82	15.56	15.84	17.19	10.66	10.95	11.68	11.96	13.31
12H	4H	13.55	13.96	14.56	14.97	16.26	9.83	10.24	10.84	11.24	12.54
	6H	14.15	14.47	15.17	15.49	16.80	10.40	10.72	11.42	11.74	13.05
	8H	14.37	14.66	15.40	15.67	17.03	10.61	10.90	11.63	11.91	13.26