

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904210

Luminaire Tested: DFN2DIP-SQ4F0-140D110US830-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904210
REPORT IS A COMBINATION OF REPORTS P900164 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-140D110US830-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 20391.9 lumens
Efficiency: N/A
Efficacy: 90.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 226.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904210

CATALOG NUMBER: DFN2DIP-SQ4F0-140D110US830-RLLFLL

Luminous Intensity Polar Plot

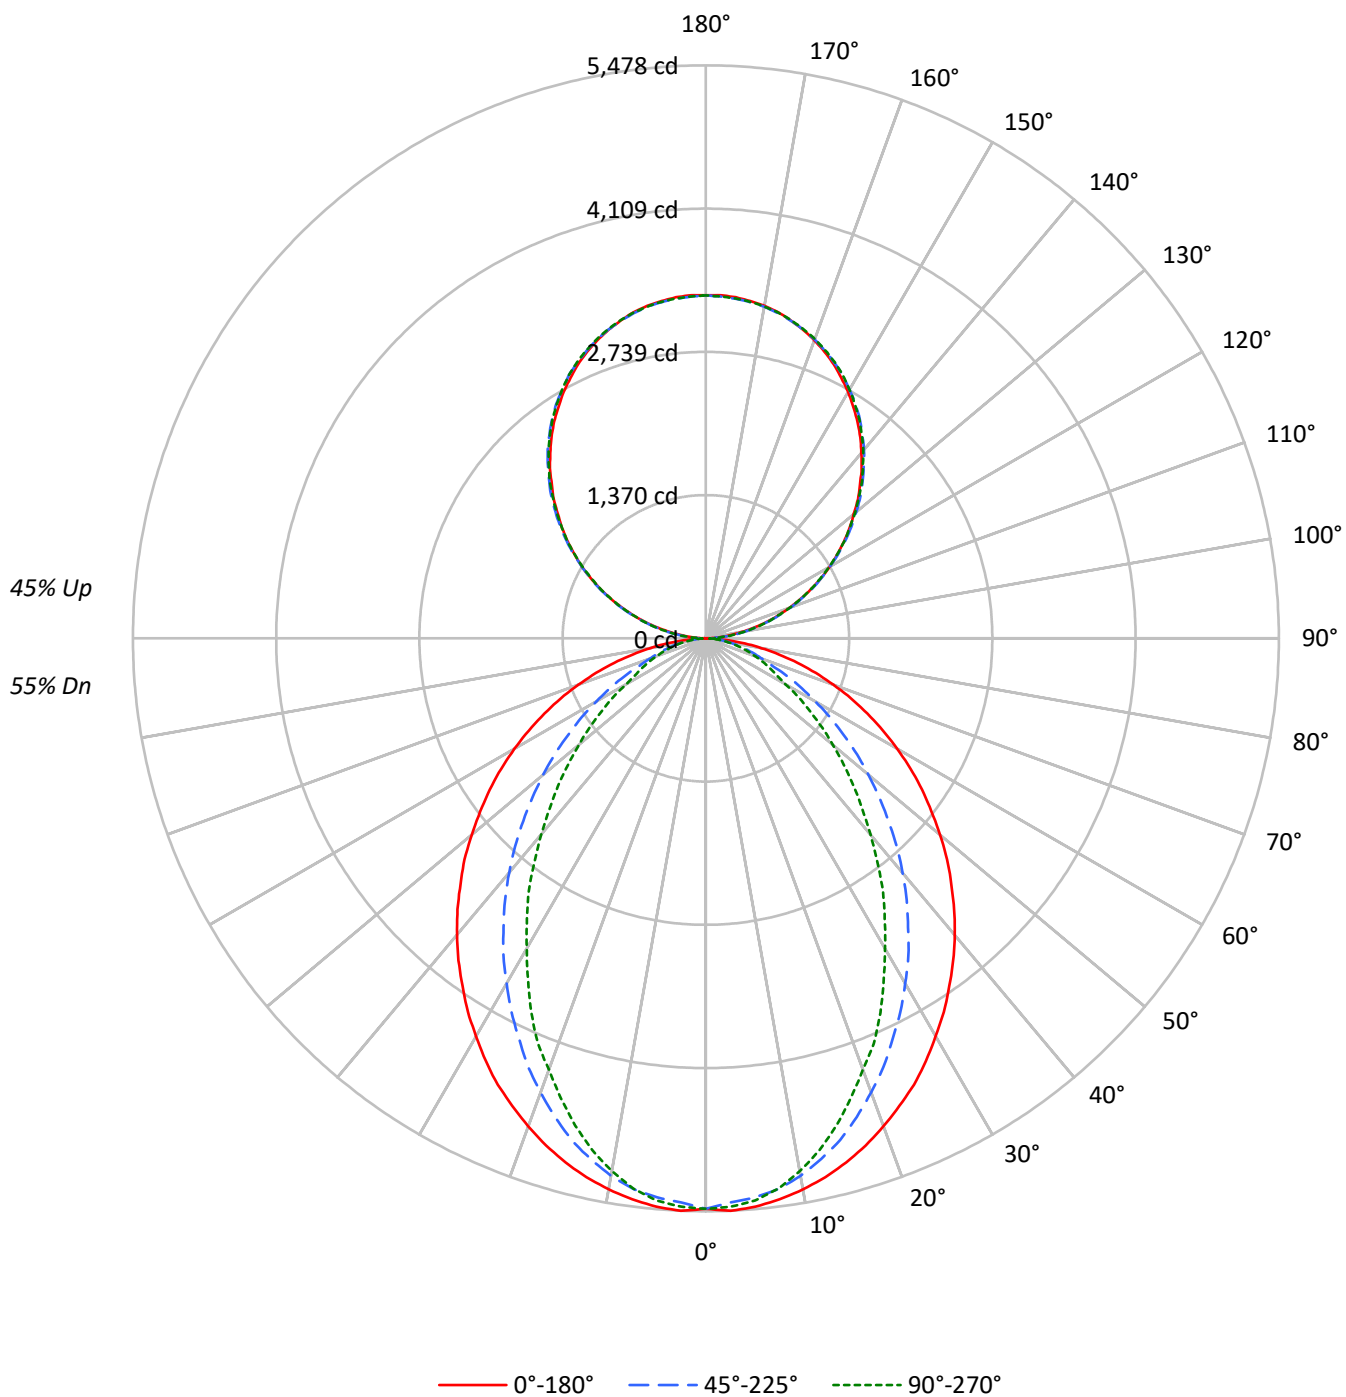

TEST NUMBER: P904210

CATALOG NUMBER: DFN2DIP-SQ4F0-140D110US830-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61
1	99	95	92	88	92	89	85	83	76	74	72	65	63	62	55	53	52
2	91	84	78	73	84	78	73	69	68	64	60	58	55	52	49	47	45
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	44	41	39
4	77	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34
5	70	59	51	45	65	55	48	43	48	43	39	42	38	34	36	32	30
6	65	53	45	40	60	50	43	38	44	38	34	38	34	30	33	29	27
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24
8	56	44	36	31	52	41	35	30	37	31	27	32	27	24	28	24	22
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	26	22	20
10	49	37	30	25	46	35	29	24	31	26	22	27	23	20	24	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3827	3827	3827
5°	3833	3767	3791
10°	3795	3694	3669
15°	3743	3572	3479
20°	3673	3405	3246
25°	3603	3217	3021
30°	3507	3024	2735
35°	3414	2817	2484
40°	3319	2602	2195
45°	3209	2364	1934
50°	3095	2123	1679
55°	2977	1866	1433
60°	2839	1597	1181
65°	2681	1323	1064
70°	2489	1068	965
75°	2247	943	880
80°	1898	794	767
85°	1322	534	584

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3209 cd/sqm

TEST NUMBER: P904210

CATALOG NUMBER: DFN2DIP-SQ4F0-140D110US830-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	511.1	2.5
10°-20°	1403.2	6.9
20°-30°	1970.0	9.7
30°-40°	2147.4	10.5
40°-50°	1973.7	9.7
50°-60°	1550.0	7.6
60°-70°	1008.9	4.9
70°-80°	519.3	2.5
80°-90°	141.9	0.7
90°-100°	202.9	1.0
100°-110°	644.7	3.2
110°-120°	1103.3	5.4
120°-130°	1451.0	7.1
130°-140°	1628.6	8.0
140°-150°	1597.1	7.8
150°-160°	1339.7	6.6
160°-170°	888.5	4.4
170°-180°	310.5	1.5
0°-30°	3884.3	19.0
0°-40°	6031.7	29.6
0°-60°	9555.4	46.9
0°-90°	11225.6	55.0
90°-120°	1950.9	9.6
90°-150°	6627.6	32.5
90°-180°	9166.0	44.9
0°-180°	20391.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5454	5454	5454	5454	5454	
5°	5454	5429	5365	5409	5394	517
15°	5187	5133	4965	4871	4822	1462
25°	4709	4550	4225	4023	3948	2165
35°	4057	3805	3371	3060	2951	2539
45°	3317	2986	2468	2117	1999	2561
55°	2522	2137	1604	1308	1214	2253
65°	1703	1303	859	691	676	1688
75°	908	562	395	360	356	960
85°	212	108	94	94	94	243
90°	3	36	97	91	94	20
95°	144	172	177	177	172	161
105°	595	603	609	614	614	628
115°	1107	1123	1118	1115	1107	1095
125°	1610	1635	1627	1618	1615	1439
135°	2083	2114	2119	2116	2109	1610
145°	2529	2548	2564	2567	2556	1580
155°	2892	2899	2908	2922	2913	1331
165°	3146	3142	3142	3162	3148	887
175°	3273	3265	3259	3279	3262	311
180°	3279	3279	3279	3279	3279	

TEST NUMBER: P904210

CATALOG NUMBER: DFN2DIP-SQ4F0-140D110US830-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5453.7	5453.7	5453.7	5453.7	5453.7
2.5°	5478.3	5453.7	5399.3	5449.0	5439.0
5°	5453.7	5429.1	5364.7	5409.3	5394.5
7.5°	5409.3	5379.8	5310.8	5330.2	5305.6
10°	5350.1	5315.5	5217.1	5201.8	5172.5
12.5°	5276.2	5231.7	5098.1	5068.8	5014.4
15°	5187.2	5132.7	4965.1	4871.4	4822.2
17.5°	5083.5	5004.4	4797.1	4688.7	4609.6
20°	4965.1	4866.2	4619.6	4496.5	4387.6
22.5°	4836.8	4723.3	4436.8	4269.2	4195.4
25°	4708.6	4550.4	4224.8	4022.6	3948.2
27.5°	4555.7	4387.6	4027.3	3795.3	3681.8
30°	4392.8	4204.9	3810.0	3558.7	3425.1
32.5°	4234.7	4007.4	3603.2	3306.8	3183.2
35°	4057.2	3805.3	3371.2	3060.2	2951.2
37.5°	3884.4	3612.6	3153.8	2813.0	2689.9
40°	3701.6	3405.8	2926.6	2576.3	2448.1
42.5°	3514.2	3198.4	2699.9	2334.4	2211.3
45°	3316.7	2985.8	2468.0	2117.0	1998.8
47.5°	3129.2	2779.0	2245.9	1895.1	1786.7
50°	2921.9	2571.6	2028.5	1687.7	1584.5
52.5°	2719.2	2349.0	1821.2	1495.5	1401.7
55°	2521.9	2136.9	1603.9	1308.1	1214.3
57.5°	2319.7	1924.9	1411.7	1135.3	1056.2
60°	2112.3	1717.5	1209.1	957.7	878.6
62.5°	1910.3	1515.4	1036.3	799.6	760.3
65°	1702.9	1302.8	858.8	691.2	676.0
67.5°	1505.4	1105.4	691.2	606.9	592.2
70°	1298.1	913.2	572.3	523.1	503.2
72.5°	1100.7	735.2	478.6	439.3	429.4
75°	908.0	562.4	394.8	360.2	355.5
77.5°	715.9	399.5	311.0	291.2	281.2
80°	537.8	286.4	236.7	217.4	217.4
82.5°	374.9	192.7	162.9	152.9	152.9
85°	212.1	108.4	93.7	93.7	93.7
87.5°	79.1	39.3	39.3	34.6	34.6
90°	2.9	35.6	96.9	91.0	93.9
92.5°	61.3	83.0	86.0	89.0	89.0
95°	144.3	172.0	176.9	176.9	172.0
97.5°	240.3	265.9	276.8	276.8	276.8
100°	350.9	373.6	381.5	381.5	378.6
102.5°	467.6	484.4	495.3	498.2	495.3
105°	595.1	603.0	609.0	613.9	613.9
107.5°	721.6	733.5	733.5	735.5	721.6
110°	844.2	860.1	860.1	860.1	852.2

TEST NUMBER: P904210

CATALOG NUMBER: DFN2DIP-SQ4F0-140D110US830-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	976.7	993.4	990.5	982.6	976.7
115°	1107.2	1122.9	1118.0	1115.1	1107.2
117.5°	1236.7	1258.4	1244.5	1236.7	1228.8
120°	1367.2	1388.9	1367.2	1367.2	1358.3
122.5°	1485.8	1513.4	1499.6	1491.7	1485.8
125°	1610.3	1635.0	1627.1	1618.3	1615.2
127.5°	1731.9	1762.6	1751.7	1739.8	1731.9
130°	1845.6	1881.2	1876.2	1870.3	1859.4
132.5°	1973.1	2000.8	2002.8	1989.0	1981.0
135°	2082.8	2113.5	2119.4	2116.5	2108.6
137.5°	2205.5	2230.1	2235.1	2233.1	2221.3
140°	2313.2	2337.9	2351.7	2351.7	2340.9
142.5°	2423.9	2448.6	2456.5	2459.5	2448.6
145°	2528.7	2548.4	2564.3	2567.2	2556.4
147.5°	2622.6	2647.3	2659.2	2664.1	2653.3
150°	2719.5	2736.3	2747.1	2756.1	2747.1
152.5°	2805.5	2822.3	2836.1	2847.0	2836.1
155°	2891.5	2899.4	2908.3	2922.2	2913.2
157.5°	2965.6	2971.6	2976.5	2996.2	2982.4
160°	3031.9	3037.8	3040.7	3057.6	3045.7
162.5°	3093.1	3093.1	3096.2	3114.9	3101.1
165°	3145.5	3142.5	3142.5	3162.3	3148.5
167.5°	3193.0	3184.1	3184.1	3203.9	3190.0
170°	3228.6	3220.7	3217.7	3237.4	3220.7
172.5°	3253.3	3245.4	3242.4	3262.2	3245.4
175°	3273.1	3265.2	3259.2	3279.0	3262.2
177.5°	3283.9	3276.0	3270.1	3286.9	3270.1
180°	3279.0	3279.0	3279.0	3279.0	3279.0

TEST NUMBER: P904210

CATALOG NUMBER: DFN2DIP-SQ4F0-140D110US830-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.28	13.15	13.20	14.09	15.29	8.24	9.11	9.16	10.05	11.25
	3H	13.97	14.75	14.90	15.69	16.91	9.43	10.21	10.37	11.16	12.38
	4H	14.58	15.32	15.53	16.26	17.50	9.89	10.62	10.83	11.57	12.80
	6H	15.01	15.69	15.96	16.64	17.88	10.21	10.89	11.17	11.84	13.09
	8H	15.14	15.78	16.10	16.75	18.00	10.30	10.95	11.27	11.92	13.16
	12H	15.20	15.82	16.17	16.78	18.05	10.35	10.96	11.32	11.93	13.19
4H	2H	12.30	13.04	13.26	13.99	15.22	8.84	9.58	9.80	10.53	11.76
	3H	14.14	14.75	15.10	15.73	16.98	10.20	10.81	11.16	11.79	13.04
	4H	14.84	15.40	15.81	16.37	17.64	10.75	11.31	11.72	12.28	13.55
	6H	15.36	15.84	16.34	16.84	18.11	11.17	11.65	12.16	12.65	13.92
	8H	15.54	15.99	16.52	16.98	18.26	11.30	11.75	12.29	12.74	14.02
	12H	15.64	16.04	16.64	17.05	18.34	11.37	11.77	12.37	12.78	14.07
8H	4H	14.81	15.26	15.79	16.25	17.53	11.04	11.48	12.02	12.47	13.76
	6H	15.38	15.75	16.39	16.78	18.07	11.56	11.93	12.57	12.96	14.24
	8H	15.60	15.93	16.62	16.95	18.25	11.75	12.08	12.77	13.09	14.40
	12H	15.75	16.03	16.77	17.04	18.39	11.87	12.16	12.89	13.17	14.52
12H	4H	14.76	15.17	15.77	16.17	17.46	11.04	11.45	12.05	12.45	13.74
	6H	15.36	15.69	16.38	16.70	18.00	11.61	11.93	12.63	12.95	14.25
	8H	15.58	15.87	16.60	16.88	18.23	11.82	12.11	12.84	13.12	14.47