

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P904234

Luminaire Tested: DFN2DIP-SQ4F0-160D080US830-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P904234
REPORT IS A COMBINATION OF REPORTS P900112 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-160D080US830-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 19491.8 lumens
Efficiency: N/A
Efficacy: 86.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 226.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P904234

CATALOG NUMBER: DFN2DIP-SQ4F0-160D080US830-RLLFLL

Luminous Intensity Polar Plot

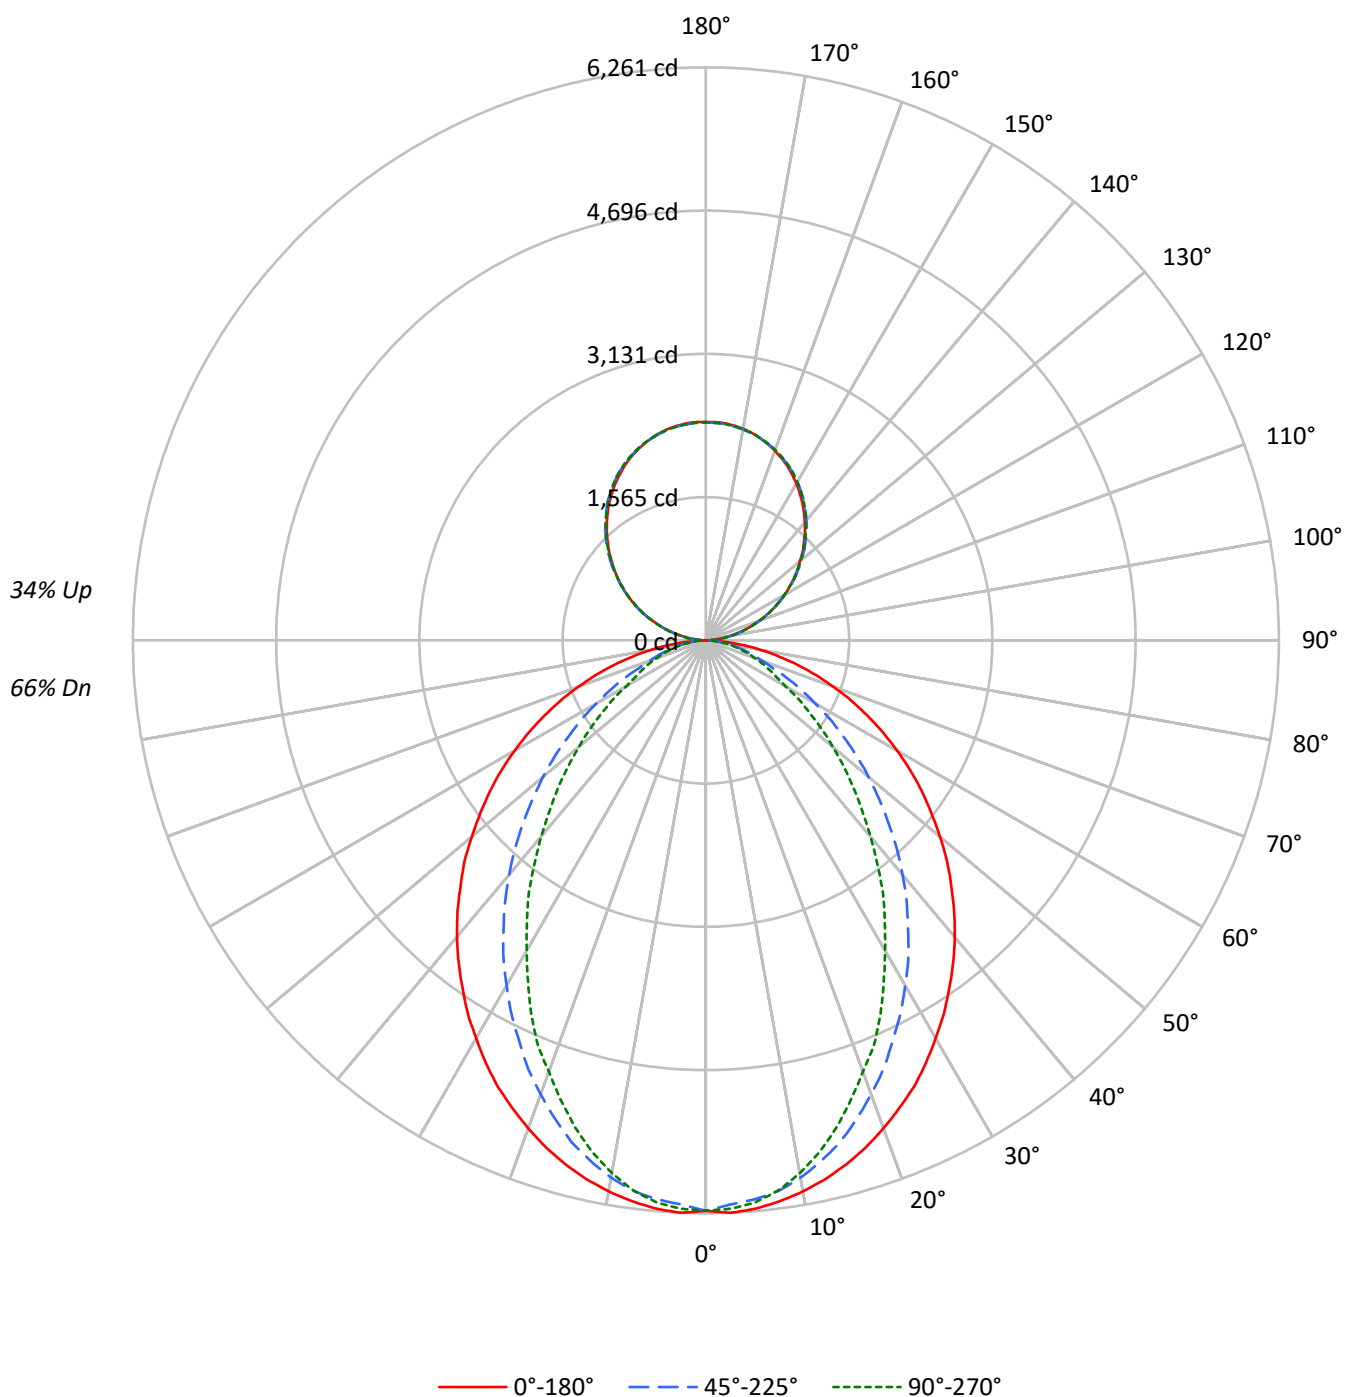

TEST NUMBER: P904234

CATALOG NUMBER: DFN2DIP-SQ4F0-160D080US830-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71
1	102	98	94	91	96	92	89	86	82	79	77	72	70	69	63	62	61
2	93	86	80	75	88	81	76	72	72	68	65	64	61	58	57	54	52
3	86	76	69	63	80	72	66	61	65	59	55	57	53	50	51	48	45
4	79	68	60	54	74	65	58	52	58	52	48	52	47	44	46	42	40
5	73	61	53	47	68	58	51	45	52	46	42	47	42	38	42	38	35
6	67	55	47	41	63	52	45	40	47	41	37	42	38	34	38	34	31
7	62	50	42	37	59	48	40	35	43	37	33	39	34	30	35	31	28
8	58	46	38	33	55	44	37	32	40	34	29	36	31	27	32	28	25
9	54	42	35	29	51	40	33	29	36	31	27	33	28	25	30	26	23
10	51	39	31	27	48	37	30	26	34	28	24	31	26	23	28	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4373	4373	4373
5°	4380	4305	4333
10°	4337	4221	4193
15°	4277	4083	3976
20°	4198	3891	3710
25°	4117	3676	3452
30°	4009	3456	3126
35°	3902	3219	2838
40°	3794	2974	2509
45°	3668	2701	2210
50°	3538	2426	1918
55°	3402	2133	1638
60°	3244	1825	1350
65°	3064	1512	1216
70°	2844	1221	1103
75°	2569	1078	1006
80°	2169	907	877
85°	1510	611	668

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3668 cd/sqm

TEST NUMBER: P904234

CATALOG NUMBER: DFN2DIP-SQ4F0-160D080US830-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	584.1	3.0
10°-20°	1603.6	8.2
20°-30°	2251.4	11.6
30°-40°	2454.2	12.6
40°-50°	2255.7	11.6
50°-60°	1771.5	9.1
60°-70°	1153.0	5.9
70°-80°	593.5	3.0
80°-90°	158.3	0.8
90°-100°	147.6	0.8
100°-110°	468.9	2.4
110°-120°	802.4	4.1
120°-130°	1055.3	5.4
130°-140°	1184.5	6.1
140°-150°	1161.5	6.0
150°-160°	974.4	5.0
160°-170°	646.2	3.3
170°-180°	225.9	1.2
0°-30°	4439.2	22.8
0°-40°	6893.3	35.4
0°-60°	10920.4	56.0
0°-90°	12825.4	65.8
90°-120°	1418.8	7.3
90°-150°	4820.1	24.7
90°-180°	6666.0	34.2
0°-180°	19491.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	6233	6233	6233	6233	6233	
5°	6233	6205	6131	6182	6165	591
15°	5928	5866	5674	5567	5511	1671
25°	5381	5200	4828	4597	4512	2475
35°	4637	4349	3853	3497	3373	2902
45°	3790	3412	2820	2420	2284	2927
55°	2882	2442	1833	1495	1388	2575
65°	1946	1489	982	790	773	1929
75°	1038	643	451	412	406	1098
85°	242	124	107	107	107	278
90°	2	26	70	66	68	19
95°	105	125	129	129	125	117
105°	433	439	443	446	446	457
115°	805	817	813	811	805	796
125°	1171	1189	1183	1177	1175	1047
135°	1515	1537	1541	1539	1534	1171
145°	1839	1853	1865	1867	1859	1149
155°	2103	2109	2115	2125	2119	968
165°	2288	2286	2286	2300	2290	645
175°	2380	2375	2370	2385	2372	226
180°	2385	2385	2385	2385	2385	



TEST NUMBER: P904234

CATALOG NUMBER: DFN2DIP-SQ4F0-160D080US830-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	6232.8	6232.8	6232.8	6232.8	6232.8
2.5°	6260.9	6232.8	6170.5	6227.5	6216.1
5°	6232.8	6204.7	6131.0	6181.9	6165.2
7.5°	6181.9	6148.4	6069.4	6091.6	6063.5
10°	6114.4	6074.9	5962.3	5945.0	5911.4
12.5°	6029.9	5979.1	5826.5	5793.0	5730.8
15°	5928.2	5866.0	5674.5	5567.3	5511.0
17.5°	5809.7	5719.3	5482.4	5358.4	5268.2
20°	5674.5	5561.4	5279.5	5138.8	5014.4
22.5°	5527.8	5397.9	5070.6	4879.2	4794.7
25°	5381.3	5200.5	4828.3	4597.3	4512.3
27.5°	5206.5	5014.4	4602.6	4337.6	4207.7
30°	5020.4	4805.6	4354.3	4067.1	3914.5
32.5°	4839.7	4579.9	4117.9	3779.2	3637.9
35°	4636.7	4348.9	3852.8	3497.3	3372.9
37.5°	4439.3	4128.7	3604.5	3214.8	3074.2
40°	4230.4	3892.3	3344.7	2944.3	2797.7
42.5°	4016.2	3655.3	3085.6	2667.9	2527.2
45°	3790.5	3412.4	2820.5	2419.5	2284.3
47.5°	3576.3	3176.0	2566.7	2165.8	2041.9
50°	3339.3	2938.9	2318.4	1928.8	1810.9
52.5°	3107.8	2684.6	2081.4	1709.2	1602.0
55°	2882.1	2442.2	1833.1	1494.9	1387.8
57.5°	2651.1	2199.9	1613.4	1297.4	1207.0
60°	2414.1	1962.9	1381.8	1094.6	1004.2
62.5°	2183.1	1731.9	1184.3	913.8	868.9
65°	1946.2	1488.9	981.5	789.9	772.6
67.5°	1720.5	1263.3	789.9	693.6	676.8
70°	1483.6	1043.7	654.1	597.9	575.1
72.5°	1257.9	840.2	547.0	502.1	490.7
75°	1037.7	642.7	451.2	411.7	406.3
77.5°	818.0	456.6	355.4	332.7	321.4
80°	614.6	327.3	270.5	248.4	248.4
82.5°	428.5	220.3	186.2	174.7	174.7
85°	242.3	123.9	107.2	107.2	107.2
87.5°	90.4	44.9	44.9	39.5	39.5
90°	2.2	25.9	70.5	66.2	68.3
92.5°	44.6	60.4	62.6	64.7	64.7
95°	105.0	125.1	128.7	128.7	125.1
97.5°	174.7	193.4	201.3	201.3	201.3
100°	255.2	271.7	277.5	277.5	275.3
102.5°	340.1	352.3	360.1	362.3	360.1
105°	432.8	438.6	442.9	446.5	446.5
107.5°	524.8	533.5	533.5	534.9	524.8
110°	614.0	625.5	625.5	625.5	619.7



TEST NUMBER: P904234

CATALOG NUMBER: DFN2DIP-SQ4F0-160D080US830-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	710.3	722.6	720.4	714.6	710.3
115°	805.2	816.7	813.1	811.0	805.2
117.5°	899.4	915.2	905.1	899.4	893.6
120°	994.3	1010.1	994.3	994.3	987.8
122.5°	1080.5	1100.7	1090.6	1084.9	1080.5
125°	1171.1	1189.1	1183.4	1176.9	1174.8
127.5°	1259.6	1281.9	1273.9	1265.4	1259.6
130°	1342.3	1368.1	1364.5	1360.3	1352.4
132.5°	1435.0	1455.1	1456.6	1446.5	1440.8
135°	1514.8	1537.1	1541.4	1539.3	1533.5
137.5°	1603.9	1621.9	1625.5	1624.1	1615.4
140°	1682.3	1700.3	1710.3	1710.3	1702.4
142.5°	1762.8	1780.8	1786.6	1788.8	1780.8
145°	1839.1	1853.4	1864.9	1867.1	1859.2
147.5°	1907.3	1925.3	1933.9	1937.6	1929.7
150°	1977.8	1990.0	1997.9	2004.4	1997.9
152.5°	2040.3	2052.6	2062.7	2070.6	2062.7
155°	2102.9	2108.7	2115.2	2125.2	2118.7
157.5°	2156.8	2161.2	2164.7	2179.1	2169.1
160°	2205.0	2209.3	2211.5	2223.6	2215.1
162.5°	2249.6	2249.6	2251.7	2265.4	2255.3
165°	2287.6	2285.5	2285.5	2299.9	2289.8
167.5°	2322.1	2315.7	2315.7	2330.1	2320.0
170°	2348.1	2342.3	2340.1	2354.6	2342.3
172.5°	2366.1	2360.3	2358.1	2372.5	2360.3
175°	2380.4	2374.6	2370.3	2384.7	2372.5
177.5°	2388.3	2382.6	2378.2	2390.5	2378.2
180°	2384.7	2384.7	2384.7	2384.7	2384.7

TEST NUMBER: P904234

CATALOG NUMBER: DFN2DIP-SQ4F0-160D080US830-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.65	14.62	14.46	15.46	16.49	9.61	10.59	10.42	11.42	12.45
	3H	15.34	16.21	16.17	17.06	18.12	10.81	11.68	11.64	12.53	13.58
	4H	15.96	16.78	16.80	17.63	18.70	11.26	12.09	12.11	12.94	14.01
	6H	16.39	17.15	17.25	18.01	19.09	11.59	12.35	12.45	13.21	14.29
	8H	16.52	17.25	17.39	18.12	19.20	11.69	12.41	12.56	13.29	14.37
	12H	16.59	17.28	17.46	18.15	19.26	11.74	12.43	12.61	13.30	14.40
4H	2H	13.68	14.51	14.53	15.36	16.43	10.22	11.05	11.07	11.90	12.97
	3H	15.53	16.22	16.39	17.10	18.18	11.59	12.27	12.45	13.16	14.24
	4H	16.23	16.85	17.10	17.73	18.85	12.14	12.76	13.02	13.65	14.76
	6H	16.76	17.30	17.65	18.20	19.31	12.57	13.11	13.46	14.01	15.13
	8H	16.94	17.44	17.83	18.34	19.47	12.70	13.20	13.59	14.10	15.23
	12H	17.04	17.49	17.95	18.41	19.54	12.77	13.23	13.69	14.14	15.28
8H	4H	16.21	16.71	17.10	17.61	18.74	12.44	12.94	13.33	13.84	14.96
	6H	16.79	17.20	17.70	18.14	19.27	12.96	13.37	13.88	14.32	15.44
	8H	17.01	17.37	17.94	18.31	19.45	13.15	13.52	14.08	14.45	15.60
	12H	17.15	17.48	18.09	18.40	19.60	13.28	13.60	14.21	14.53	15.72
12H	4H	16.17	16.62	17.08	17.54	18.67	12.45	12.90	13.36	13.82	14.95
	6H	16.76	17.13	17.69	18.06	19.21	13.01	13.38	13.94	14.31	15.46
	8H	16.99	17.32	17.92	18.24	19.44	13.23	13.55	14.16	14.48	15.67