

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906709

Luminaire Tested: DFN2DIP-SQ4F0-070D080US835-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906709
REPORT IS A COMBINATION OF REPORTS P901617 AND P898471
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-070D080US835-FLLONL
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14850.0 lumens
Efficiency: N/A
Efficacy: 122.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 120.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906709

CATALOG NUMBER: DFN2DIP-SQ4F0-070D080US835-FLLONL

Luminous Intensity Polar Plot

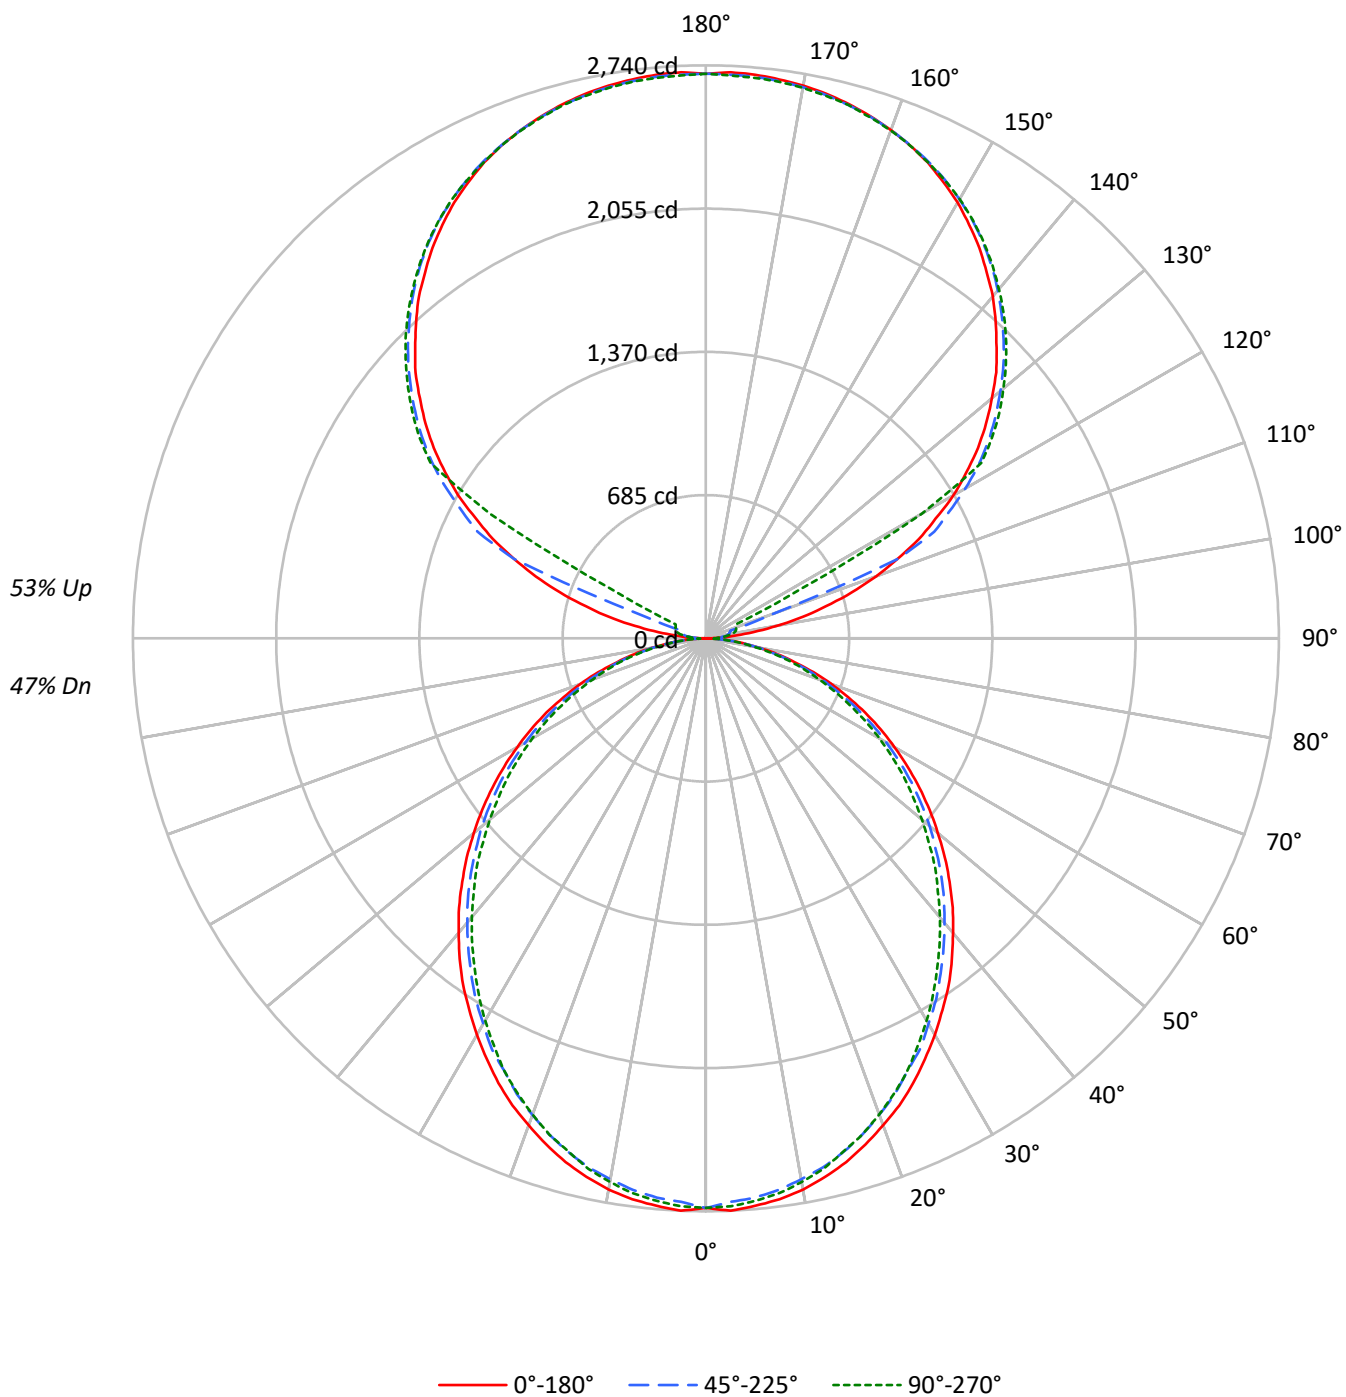

TEST NUMBER: P906709

CATALOG NUMBER: DFN2DIP-SQ4F0-070D080US835-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	67	67	67	53	53	53
1	97	93	89	85	89	85	82	79	71	69	67	59	57	56	47	46	45
2	88	81	75	70	81	75	69	65	63	59	55	52	49	46	41	39	38
3	81	71	64	58	74	66	59	54	55	50	47	46	42	39	37	34	32
4	74	63	55	49	67	58	51	46	49	44	40	41	37	34	33	30	28
5	68	56	48	42	62	52	45	39	44	38	34	36	32	29	29	27	24
6	62	50	42	36	57	47	39	34	40	34	30	33	29	25	27	24	21
7	58	45	37	32	53	42	35	30	36	30	26	30	26	23	24	21	19
8	53	41	33	28	49	38	31	27	33	27	23	27	23	20	22	19	17
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15
10	46	34	27	22	43	32	26	21	28	22	19	23	19	16	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1911	1911	1911
5°	1914	1885	1898
10°	1899	1860	1873
15°	1871	1830	1833
20°	1833	1788	1792
25°	1795	1737	1746
30°	1748	1690	1686
35°	1704	1635	1622
40°	1649	1579	1562
45°	1594	1523	1500
50°	1534	1464	1429
55°	1472	1396	1363
60°	1401	1315	1288
65°	1324	1231	1200
70°	1225	1129	1105
75°	1089	1007	1018
80°	925	852	850
85°	669	583	571

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1594 cd/sqm

TEST NUMBER: P906709

CATALOG NUMBER: DFN2DIP-SQ4F0-070D080US835-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	256.4	1.7
10°-20°	721.3	4.9
20°-30°	1060.0	7.1
30°-40°	1231.1	8.3
40°-50°	1229.6	8.3
50°-60°	1072.2	7.2
60°-70°	792.6	5.3
70°-80°	448.4	3.0
80°-90°	123.1	0.8
90°-100°	89.0	0.6
100°-110°	331.9	2.2
110°-120°	880.2	5.9
120°-130°	1459.9	9.8
130°-140°	1550.7	10.4
140°-150°	1441.2	9.7
150°-160°	1158.7	7.8
160°-170°	746.6	5.0
170°-180°	257.0	1.7
0°-30°	2037.7	13.7
0°-40°	3268.8	22.0
0°-60°	5570.6	37.5
0°-90°	6934.8	46.7
90°-120°	1301.1	8.8
90°-150°	5752.9	38.7
90°-180°	7915.0	53.3
0°-180°	14850.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2724	2724	2724	2724	2724	
5°	2724	2714	2685	2705	2700	259
15°	2593	2577	2543	2554	2541	730
25°	2347	2326	2281	2286	2281	1080
35°	2025	1998	1956	1941	1928	1264
45°	1648	1629	1590	1561	1550	1271
55°	1247	1231	1200	1168	1155	1115
65°	841	825	799	775	762	831
75°	440	435	422	406	411	470
85°	107	105	102	94	92	120
90°	2	23	39	49	53	14
95°	127	62	76	86	84	150
105°	594	653	119	141	148	635
115°	1123	1156	1205	301	160	1106
125°	1588	1614	1651	1664	1670	1416
135°	1965	1997	2014	2034	2030	1518
145°	2280	2278	2311	2325	2315	1426
155°	2510	2493	2516	2528	2512	1157
165°	2645	2634	2639	2653	2639	747
175°	2706	2692	2696	2710	2690	258
180°	2700	2700	2700	2700	2700	

TEST NUMBER: P906709

CATALOG NUMBER: DFN2DIP-SQ4F0-070D080US835-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2723.7	2723.7	2723.7	2723.7	2723.7
2.5°	2739.6	2726.5	2697.6	2723.7	2718.7
5°	2723.7	2713.5	2684.6	2705.4	2700.4
7.5°	2705.4	2689.8	2660.9	2682.1	2676.8
10°	2676.8	2658.4	2627.0	2647.9	2640.1
12.5°	2637.3	2621.8	2590.4	2603.4	2598.1
15°	2592.9	2577.3	2543.1	2553.7	2540.6
17.5°	2537.8	2522.3	2488.1	2501.2	2488.1
20°	2477.5	2462.0	2425.3	2433.1	2422.8
22.5°	2417.5	2393.9	2359.7	2359.7	2354.4
25°	2346.7	2325.8	2281.4	2286.4	2281.4
27.5°	2268.0	2249.7	2215.8	2208.0	2194.9
30°	2189.7	2168.5	2129.4	2121.6	2111.0
32.5°	2105.7	2090.2	2048.2	2032.4	2021.8
35°	2024.6	1998.5	1956.5	1940.7	1927.6
37.5°	1932.9	1909.3	1867.3	1849.0	1835.9
40°	1838.7	1817.6	1775.6	1752.3	1741.7
42.5°	1747.0	1725.9	1684.2	1657.8	1642.2
45°	1647.5	1629.2	1589.7	1561.1	1550.5
47.5°	1550.5	1532.2	1490.2	1461.3	1445.8
50°	1448.3	1435.2	1398.5	1361.9	1348.8
52.5°	1348.8	1330.5	1296.6	1267.7	1249.3
55°	1246.8	1231.0	1199.6	1168.2	1155.1
57.5°	1144.6	1131.5	1097.3	1065.9	1055.4
60°	1042.3	1032.0	995.4	966.5	958.7
62.5°	942.8	924.5	898.4	872.3	861.7
65°	840.9	825.0	798.9	775.3	762.2
67.5°	736.1	722.8	699.4	681.1	670.5
70°	639.1	628.6	604.9	586.6	576.3
72.5°	539.6	529.1	516.0	497.7	489.9
75°	439.9	434.9	421.5	406.0	411.3
77.5°	351.0	340.4	335.1	327.3	319.6
80°	262.0	259.3	254.0	246.2	240.9
82.5°	178.1	178.1	175.6	165.1	165.1
85°	107.3	104.8	102.3	94.2	91.7
87.5°	47.2	42.0	36.7	28.9	26.1
90°	1.9	23.4	39.0	48.9	52.7
92.5°	48.9	41.1	46.9	50.8	52.7
95°	126.9	62.4	76.1	86.1	84.0
97.5°	228.5	68.4	99.5	105.6	107.4
100°	345.9	78.2	111.4	126.9	130.8
102.5°	474.7	470.9	115.3	136.6	142.7
105°	593.9	652.6	119.2	140.6	148.5
107.5°	732.6	781.3	123.2	144.5	152.4
110°	865.6	906.4	342.0	146.6	154.3

TEST NUMBER: P906709

CATALOG NUMBER: DFN2DIP-SQ4F0-070D080US835-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	990.6	1025.6	992.5	150.3	156.4
115°	1123.3	1156.5	1205.4	300.9	160.3
117.5°	1238.6	1277.6	1311.0	1031.4	519.7
120°	1367.6	1396.8	1432.1	1455.5	1191.7
122.5°	1476.8	1508.2	1547.4	1559.0	1561.1
125°	1588.2	1613.7	1650.8	1664.5	1670.3
127.5°	1689.8	1717.2	1746.7	1766.1	1768.0
130°	1785.6	1816.9	1838.3	1859.9	1858.0
132.5°	1883.3	1908.8	1930.2	1947.8	1945.9
135°	1965.4	1996.7	2014.1	2033.9	2029.9
137.5°	2051.3	2074.7	2094.4	2113.9	2108.1
140°	2135.2	2151.0	2172.4	2190.0	2180.2
142.5°	2205.8	2219.4	2244.7	2260.3	2250.5
145°	2280.0	2277.9	2311.1	2324.8	2315.0
147.5°	2344.3	2338.5	2371.6	2381.4	2373.7
150°	2406.9	2393.2	2424.5	2436.1	2426.4
152.5°	2459.6	2444.0	2473.2	2485.1	2471.4
155°	2510.4	2493.0	2516.4	2528.0	2512.5
157.5°	2551.4	2535.9	2553.5	2567.2	2551.4
160°	2586.7	2574.9	2586.7	2598.3	2584.6
162.5°	2617.8	2606.2	2615.9	2629.6	2612.0
165°	2645.2	2633.6	2639.4	2653.0	2639.4
167.5°	2666.7	2654.9	2660.9	2674.6	2657.0
170°	2684.4	2672.5	2676.5	2690.2	2672.5
172.5°	2696.0	2684.4	2688.3	2702.0	2684.4
175°	2705.7	2692.0	2696.0	2709.6	2690.2
177.5°	2709.6	2696.0	2698.0	2711.7	2694.1
180°	2699.9	2699.9	2699.9	2699.9	2699.9

TEST NUMBER: P906709

CATALOG NUMBER: DFN2DIP-SQ4F0-070D080US835-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.22	10.05	10.21	11.05	12.37	8.78	9.61	9.76	10.61	11.92
	3H	10.88	11.63	11.88	12.64	13.98	10.39	11.14	11.39	12.15	13.49
	4H	11.47	12.18	12.48	13.19	14.54	10.98	11.69	11.99	12.70	14.04
	6H	11.88	12.53	12.89	13.54	14.90	11.37	12.03	12.39	13.04	14.40
	8H	11.98	12.60	13.01	13.63	14.99	11.48	12.10	12.50	13.13	14.49
	12H	12.03	12.62	13.06	13.64	15.02	11.52	12.11	12.55	13.13	14.51
4H	2H	9.68	10.39	10.69	11.40	12.74	9.32	10.03	10.34	11.04	12.39
	3H	11.55	12.14	12.57	13.18	14.54	11.14	11.73	12.16	12.77	14.13
	4H	12.26	12.80	13.30	13.83	15.22	11.84	12.38	12.87	13.41	14.79
	6H	12.78	13.25	13.82	14.30	15.68	12.35	12.81	13.39	13.87	15.25
	8H	12.93	13.37	13.98	14.41	15.81	12.50	12.93	13.54	13.98	15.37
	12H	13.01	13.40	14.07	14.46	15.86	12.56	12.95	13.62	14.01	15.41
8H	4H	12.46	12.89	13.50	13.94	15.33	12.08	12.52	13.12	13.56	14.96
	6H	13.09	13.45	14.16	14.54	15.93	12.71	13.07	13.78	14.16	15.55
	8H	13.32	13.63	14.39	14.71	16.12	12.92	13.24	14.00	14.31	15.72
	12H	13.45	13.73	14.53	14.80	16.25	13.04	13.32	14.12	14.38	15.84
12H	4H	12.44	12.84	13.50	13.90	15.30	12.08	12.47	13.14	13.53	14.93
	6H	13.12	13.44	14.20	14.51	15.92	12.75	13.07	13.83	14.14	15.55
	8H	13.37	13.65	14.44	14.71	16.17	12.99	13.26	14.06	14.33	15.78