

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906724

Luminaire Tested: DFN2DIP-SQ4F0-070D120US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906724
REPORT IS A COMBINATION OF REPORTS P900169 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-070D120US835-FLLFL
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 17550.0 lumens
Efficiency: N/A
Efficacy: 115.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 151.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906724

CATALOG NUMBER: DFN2DIP-SQ4F0-070D120US835-FLLFLL

Luminous Intensity Polar Plot

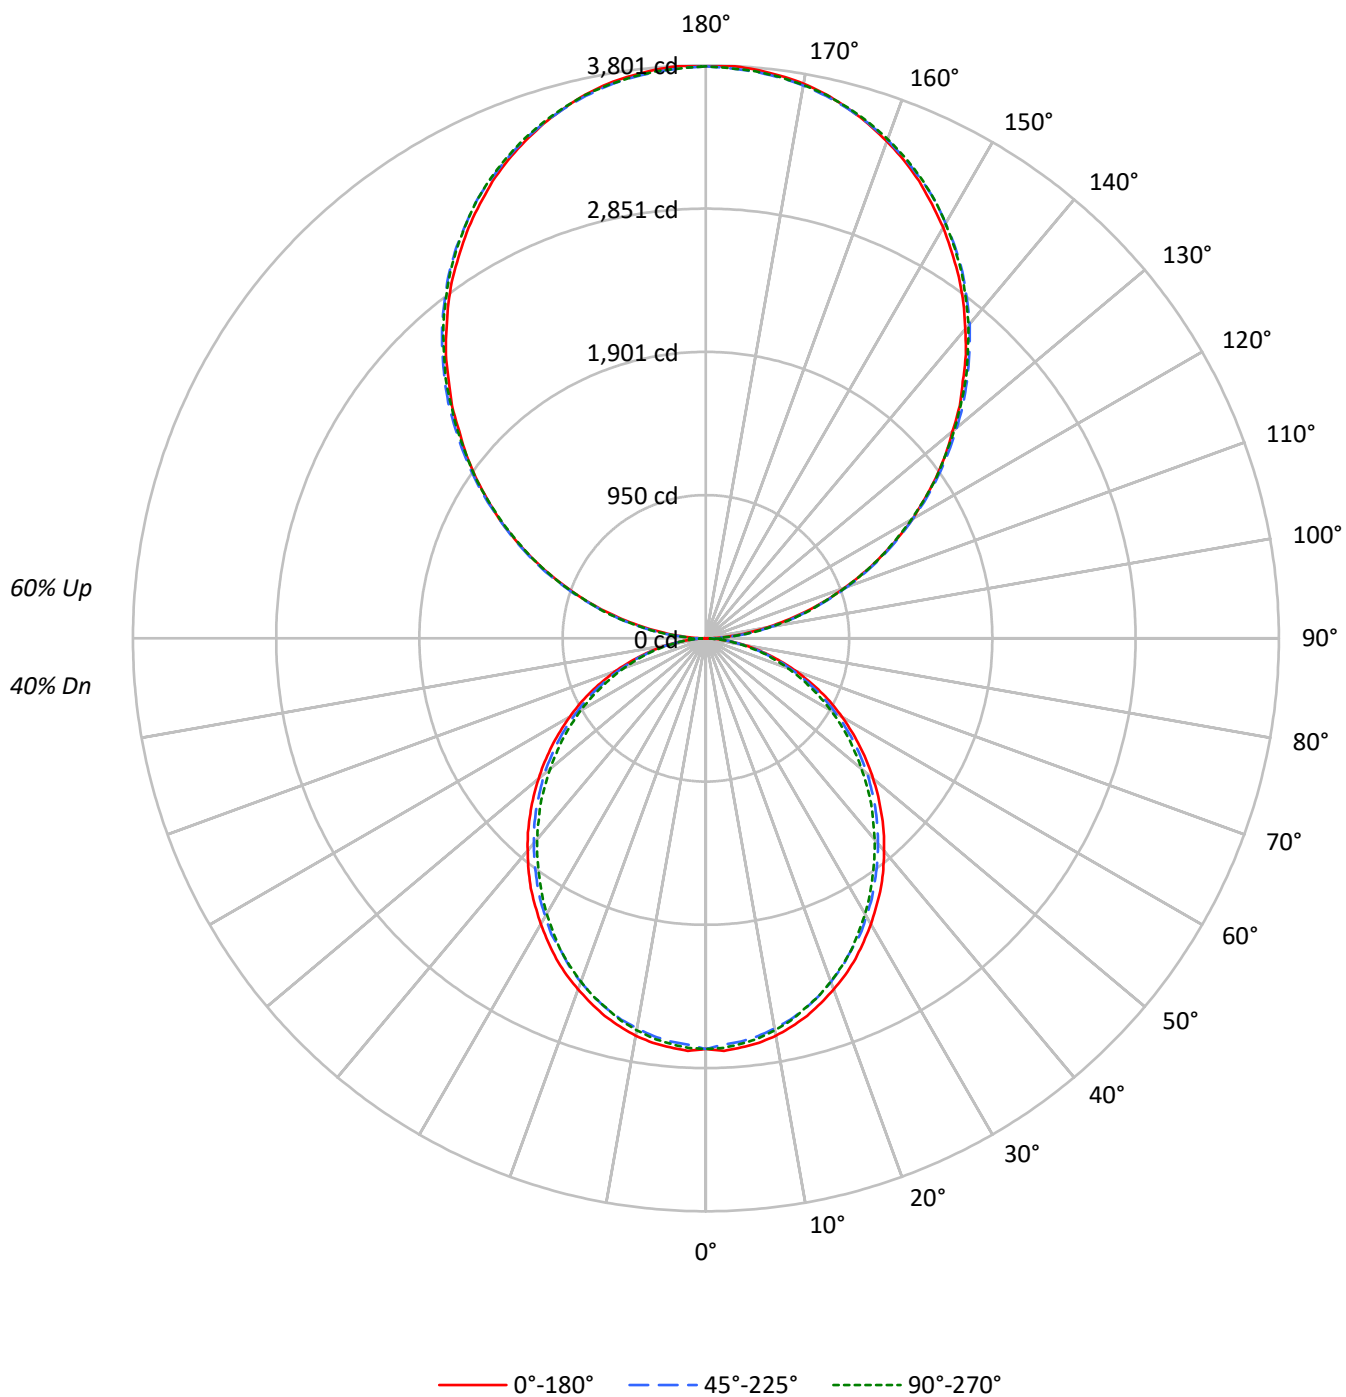

TEST NUMBER: P906724

CATALOG NUMBER: DFN2DIP-SQ4F0-070D120US835-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	78	78	78	61	61	61	47	47	47
1	95	91	87	84	87	83	80	77	68	66	64	54	52	51	41	40	39
2	87	80	74	68	79	73	67	63	59	56	53	47	45	43	36	35	33
3	79	70	63	57	72	64	58	53	52	48	44	42	39	36	32	30	28
4	72	62	54	48	66	57	50	45	47	42	38	37	34	31	29	26	24
5	66	55	47	41	60	50	43	38	42	36	32	33	30	27	26	23	21
6	61	49	41	36	55	45	38	33	37	32	28	30	26	23	23	21	19
7	56	44	37	31	51	41	34	29	34	29	25	27	24	21	21	19	16
8	52	40	33	27	48	37	30	26	31	26	22	25	21	18	20	17	15
9	49	37	29	24	44	34	27	23	28	23	20	23	19	16	18	15	13
10	45	34	27	22	41	31	25	20	26	21	18	21	17	15	17	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1911	1911	1911
5°	1914	1885	1898
10°	1899	1860	1873
15°	1871	1830	1833
20°	1833	1788	1792
25°	1795	1737	1746
30°	1748	1690	1686
35°	1704	1635	1622
40°	1649	1579	1562
45°	1594	1523	1500
50°	1534	1464	1429
55°	1472	1396	1363
60°	1401	1315	1288
65°	1324	1231	1200
70°	1225	1129	1105
75°	1089	1007	1018
80°	925	852	850
85°	669	583	571

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2987 cd/sqm

TEST NUMBER: P906724

CATALOG NUMBER: DFN2DIP-SQ4F0-070D120US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	256.4	1.5
10°-20°	721.3	4.1
20°-30°	1060.0	6.0
30°-40°	1231.1	7.0
40°-50°	1229.6	7.0
50°-60°	1072.2	6.1
60°-70°	792.6	4.5
70°-80°	448.4	2.6
80°-90°	129.1	0.7
90°-100°	234.8	1.3
100°-110°	746.2	4.3
110°-120°	1276.9	7.3
120°-130°	1679.4	9.6
130°-140°	1885.0	10.7
140°-150°	1848.5	10.5
150°-160°	1550.6	8.8
160°-170°	1028.3	5.9
170°-180°	359.4	2.0
0°-30°	2037.7	11.6
0°-40°	3268.8	18.6
0°-60°	5570.6	31.7
0°-90°	6940.8	39.5
90°-120°	2257.9	12.9
90°-150°	7670.8	43.7
90°-180°	10609.0	60.5
0°-180°	17550.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2724	2724	2724	2724	2724	
5°	2724	2714	2685	2705	2700	259
15°	2593	2577	2543	2554	2541	730
25°	2347	2326	2281	2286	2281	1080
35°	2025	1998	1956	1941	1928	1264
45°	1648	1629	1590	1561	1550	1271
55°	1247	1231	1200	1168	1155	1115
65°	841	825	799	775	762	831
75°	440	435	422	406	411	470
85°	107	105	102	94	92	120
90°	3	41	112	105	109	17
95°	167	199	205	205	199	186
105°	689	698	705	710	710	727
115°	1281	1300	1294	1291	1281	1267
125°	1864	1892	1883	1873	1870	1666
135°	2411	2446	2453	2450	2440	1863
145°	2927	2950	2968	2971	2959	1829
155°	3347	3356	3366	3382	3372	1540
165°	3641	3637	3637	3660	3644	1027
175°	3788	3779	3772	3795	3776	360
180°	3795	3795	3795	3795	3795	

TEST NUMBER: P906724

CATALOG NUMBER: DFN2DIP-SQ4F0-070D120US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2723.7	2723.7	2723.7	2723.7	2723.7
2.5°	2739.6	2726.5	2697.6	2723.7	2718.7
5°	2723.7	2713.5	2684.6	2705.4	2700.4
7.5°	2705.4	2689.8	2660.9	2682.1	2676.8
10°	2676.8	2658.4	2627.0	2647.9	2640.1
12.5°	2637.3	2621.8	2590.4	2603.4	2598.1
15°	2592.9	2577.3	2543.1	2553.7	2540.6
17.5°	2537.8	2522.3	2488.1	2501.2	2488.1
20°	2477.5	2462.0	2425.3	2433.1	2422.8
22.5°	2417.5	2393.9	2359.7	2359.7	2354.4
25°	2346.7	2325.8	2281.4	2286.4	2281.4
27.5°	2268.0	2249.7	2215.8	2208.0	2194.9
30°	2189.7	2168.5	2129.4	2121.6	2111.0
32.5°	2105.7	2090.2	2048.2	2032.4	2021.8
35°	2024.6	1998.5	1956.5	1940.7	1927.6
37.5°	1932.9	1909.3	1867.3	1849.0	1835.9
40°	1838.7	1817.6	1775.6	1752.3	1741.7
42.5°	1747.0	1725.9	1684.2	1657.8	1642.2
45°	1647.5	1629.2	1589.7	1561.1	1550.5
47.5°	1550.5	1532.2	1490.2	1461.3	1445.8
50°	1448.3	1435.2	1398.5	1361.9	1348.8
52.5°	1348.8	1330.5	1296.6	1267.7	1249.3
55°	1246.8	1231.0	1199.6	1168.2	1155.1
57.5°	1144.6	1131.5	1097.3	1065.9	1055.4
60°	1042.3	1032.0	995.4	966.5	958.7
62.5°	942.8	924.5	898.4	872.3	861.7
65°	840.9	825.0	798.9	775.3	762.2
67.5°	736.1	722.8	699.4	681.1	670.5
70°	639.1	628.6	604.9	586.6	576.3
72.5°	539.6	529.1	516.0	497.7	489.9
75°	439.9	434.9	421.5	406.0	411.3
77.5°	351.0	340.4	335.1	327.3	319.6
80°	262.0	259.3	254.0	246.2	240.9
82.5°	178.1	178.1	175.6	165.1	165.1
85°	107.3	104.8	102.3	94.2	91.7
87.5°	47.2	42.0	36.7	28.9	26.1
90°	3.4	41.2	112.1	105.3	108.7
92.5°	70.9	96.1	99.5	103.0	103.0
95°	167.0	199.1	204.8	204.8	199.1
97.5°	278.0	307.8	320.4	320.4	320.4
100°	406.2	432.5	441.6	441.6	438.2
102.5°	541.2	560.6	573.2	576.7	573.2
105°	688.8	697.9	704.8	710.5	710.5
107.5°	835.2	849.0	849.0	851.2	835.2
110°	977.1	995.4	995.4	995.4	986.3

TEST NUMBER: P906724

CATALOG NUMBER: DFN2DIP-SQ4F0-070D120US835-FLLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1130.4	1149.9	1146.4	1137.3	1130.4
115°	1281.4	1299.8	1294.0	1290.6	1281.4
117.5°	1431.3	1456.5	1440.5	1431.3	1422.2
120°	1582.4	1607.5	1582.4	1582.4	1572.1
122.5°	1719.7	1751.7	1735.7	1726.5	1719.7
125°	1863.8	1892.4	1883.3	1873.0	1869.5
127.5°	2004.6	2040.0	2027.4	2013.7	2004.6
130°	2136.1	2177.3	2171.6	2164.7	2152.1
132.5°	2283.7	2315.8	2318.0	2302.0	2292.9
135°	2410.7	2446.2	2453.1	2449.6	2440.5
137.5°	2552.6	2581.2	2586.9	2584.6	2570.9
140°	2677.3	2705.9	2721.9	2721.9	2709.3
142.5°	2805.5	2834.1	2843.2	2846.6	2834.1
145°	2926.7	2949.6	2967.9	2971.4	2958.8
147.5°	3035.4	3064.0	3077.8	3083.5	3070.9
150°	3147.6	3167.0	3179.6	3189.9	3179.6
152.5°	3247.1	3266.5	3282.6	3295.2	3282.6
155°	3346.6	3355.8	3366.1	3382.1	3371.8
157.5°	3432.5	3439.3	3445.0	3467.9	3451.9
160°	3509.1	3516.0	3519.4	3538.9	3525.1
162.5°	3580.0	3580.0	3583.5	3605.2	3589.2
165°	3640.7	3637.3	3637.3	3660.1	3644.1
167.5°	3695.6	3685.3	3685.3	3708.2	3692.2
170°	3736.8	3727.6	3724.2	3747.1	3727.6
172.5°	3765.4	3756.2	3752.8	3775.7	3756.2
175°	3788.3	3779.1	3772.3	3795.1	3775.7
177.5°	3800.9	3791.7	3784.8	3804.3	3784.8
180°	3795.1	3795.1	3795.1	3795.1	3795.1

TEST NUMBER: P906724

CATALOG NUMBER: DFN2DIP-SQ4F0-070D120US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.48	9.26	9.52	10.30	11.72	8.04	8.81	9.08	9.86	11.27
	3H	10.14	10.83	11.19	11.89	13.32	9.65	10.34	10.70	11.40	12.83
	4H	10.73	11.39	11.79	12.44	13.88	10.23	10.89	11.30	11.95	13.39
	6H	11.13	11.73	12.20	12.79	14.25	10.63	11.23	11.70	12.29	13.74
	8H	11.23	11.81	12.31	12.88	14.33	10.73	11.30	11.81	12.38	13.83
	12H	11.28	11.83	12.36	12.90	14.37	10.77	11.32	11.85	12.39	13.86
4H	2H	8.93	9.59	10.00	10.65	12.09	8.58	9.24	9.65	10.30	11.73
	3H	10.80	11.35	11.87	12.43	13.88	10.39	10.94	11.47	12.02	13.48
	4H	11.51	12.01	12.59	13.09	14.56	11.09	11.59	12.17	12.67	14.14
	6H	12.02	12.46	13.12	13.56	15.02	11.59	12.02	12.68	13.12	14.59
	8H	12.17	12.58	13.27	13.67	15.15	11.74	12.14	12.83	13.23	14.72
	12H	12.25	12.61	13.35	13.72	15.20	11.80	12.16	12.91	13.27	14.75
8H	4H	11.70	12.10	12.79	13.20	14.68	11.32	11.73	12.41	12.82	14.30
	6H	12.33	12.67	13.45	13.80	15.28	11.95	12.28	13.06	13.42	14.90
	8H	12.56	12.85	13.68	13.96	15.46	12.16	12.46	13.28	13.57	15.07
	12H	12.69	12.94	13.81	14.05	15.59	12.27	12.53	13.40	13.64	15.18
12H	4H	11.68	12.05	12.79	13.15	14.64	11.31	11.68	12.42	12.78	14.27
	6H	12.36	12.65	13.48	13.77	15.27	11.99	12.28	13.11	13.40	14.90
	8H	12.60	12.86	13.73	13.97	15.51	12.22	12.48	13.35	13.59	15.13