

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906797

Luminaire Tested: DFN2DIP-SQ4F0-090D120US835-FLLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P906797  
REPORT IS A COMBINATION OF REPORTS P901693 AND P898471  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ4F0-090D120US835-FLLONL  
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 20790.0 lumens  
Efficiency: N/A  
Efficacy: 120.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 172.8  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.983  
Total Harmonic Distortion (THDi): 0.073  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P906797  
CATALOG NUMBER: DFN2DIP-SQ4F0-090D120US835-FLLONL

### Luminous Intensity Polar Plot

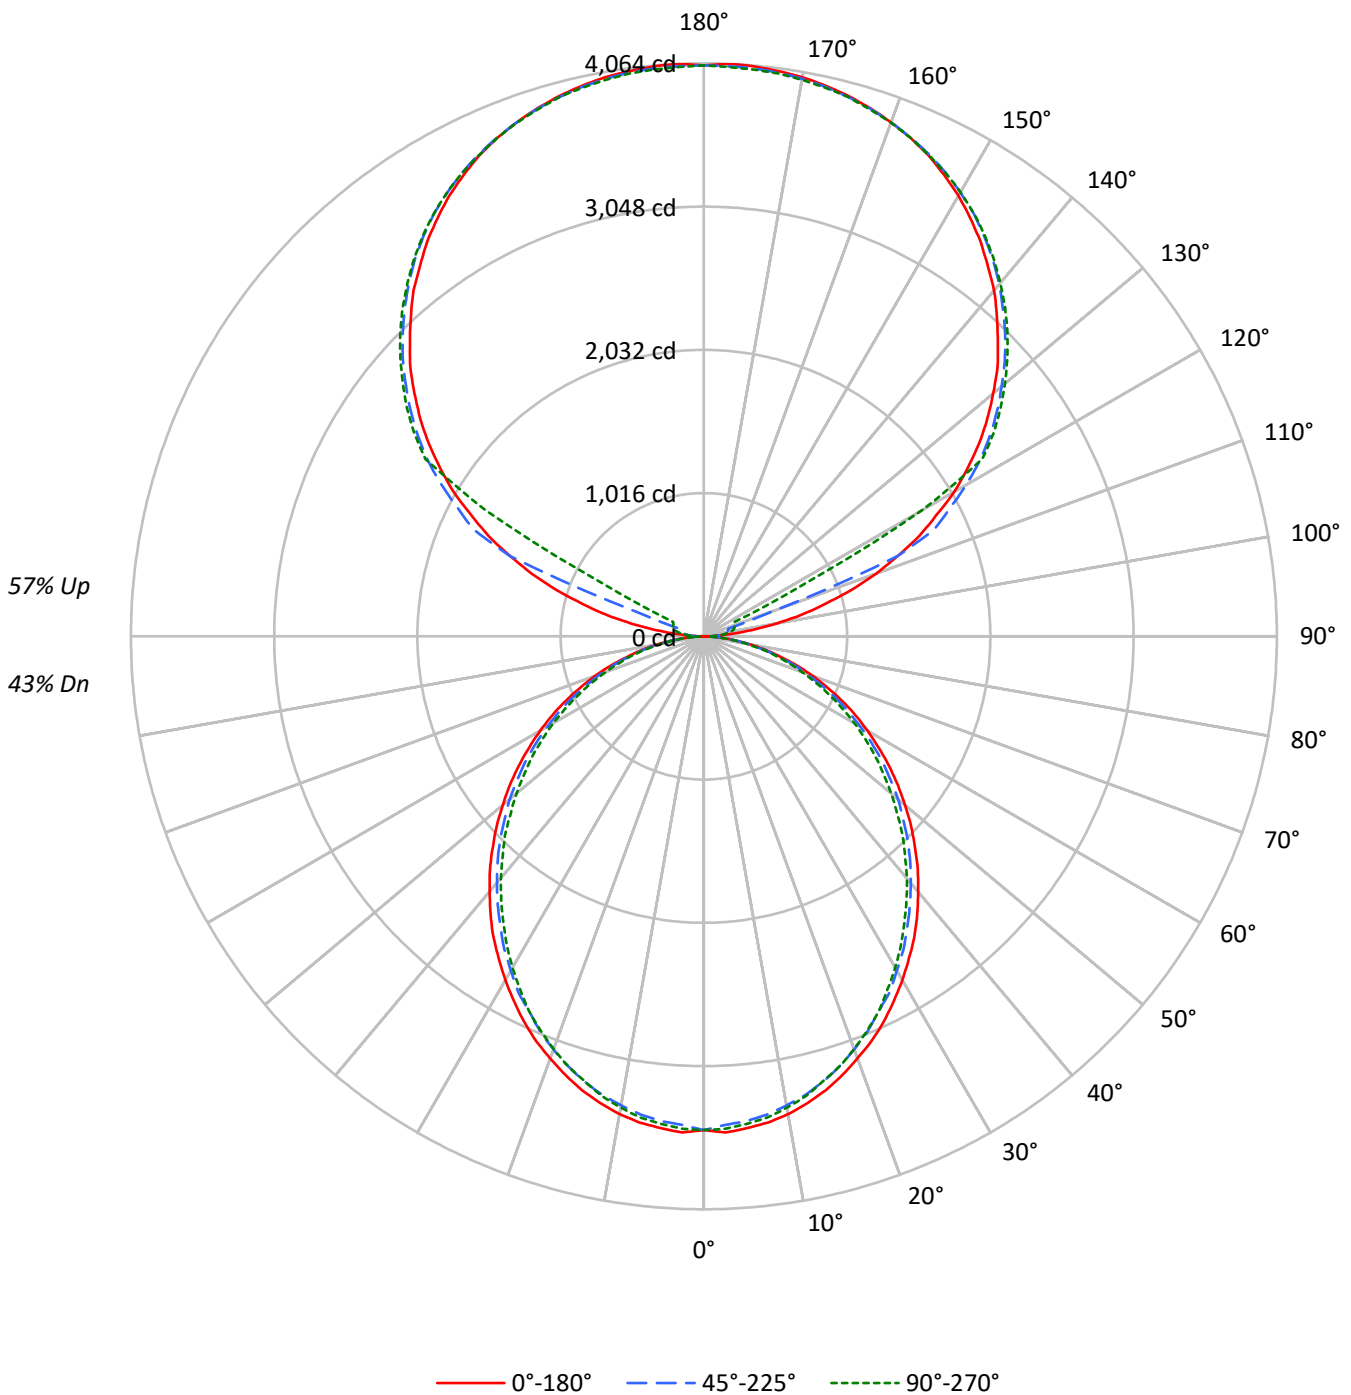



TEST NUMBER: P906797

CATALOG NUMBER: DFN2DIP-SQ4F0-090D120US835-FLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50	43				43
1	96	92	88	85	88	84	81	78	70	67	65	56	55	53	44	43	42	36				36
2	88	80	74	69	80	74	68	64	61	57	54	49	47	44	39	37	35	30				30
3	80	71	63	58	73	65	58	53	54	49	45	44	40	38	34	32	30	26				26
4	73	62	55	49	66	57	50	45	48	43	39	39	35	32	31	28	26	22				22
5	67	56	48	42	61	51	44	39	43	37	33	35	31	28	28	25	23	19				19
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20	17				17
7	57	45	37	32	52	41	34	29	35	29	25	29	25	22	23	20	18	15				15
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16	13				13
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	12				12
10	46	34	27	22	42	31	25	21	27	22	18	22	18	16	18	15	13	11				11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2457	2457	2457
5°	2461	2424	2440
10°	2441	2391	2408
15°	2405	2352	2357
20°	2357	2298	2305
25°	2308	2233	2244
30°	2248	2173	2167
35°	2191	2102	2086
40°	2120	2030	2008
45°	2050	1958	1929
50°	1973	1882	1837
55°	1892	1794	1753
60°	1801	1690	1657
65°	1702	1583	1543
70°	1575	1452	1421
75°	1400	1295	1309
80°	1189	1095	1094
85°	859	749	735

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 2171 cd/sqm



TEST NUMBER: P906797

CATALOG NUMBER: DFN2DIP-SQ4F0-090D120US835-FLLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	329.6	1.6
10°-20°	927.4	4.5
20°-30°	1362.9	6.6
30°-40°	1582.9	7.6
40°-50°	1580.9	7.6
50°-60°	1378.5	6.6
60°-70°	1019.0	4.9
70°-80°	576.6	2.8
80°-90°	159.3	0.8
90°-100°	133.5	0.6
100°-110°	497.8	2.4
110°-120°	1320.3	6.4
120°-130°	2189.8	10.5
130°-140°	2326.1	11.2
140°-150°	2161.8	10.4
150°-160°	1738.1	8.4
160°-170°	1119.9	5.4
170°-180°	385.5	1.9
0°-30°	2619.9	12.6
0°-40°	4202.8	20.2
0°-60°	7162.3	34.5
0°-90°	8917.1	42.9
90°-120°	1951.7	9.4
90°-150°	8629.4	41.5
90°-180°	11873.0	57.1
0°-180°	20790.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	3502	3502	3502	3502	3502	
5°	3502	3489	3452	3478	3472	332
15°	3334	3314	3270	3283	3266	939
25°	3017	2990	2933	2940	2933	1388
35°	2603	2570	2516	2495	2478	1626
45°	2118	2095	2044	2007	1994	1635
55°	1603	1583	1542	1502	1485	1433
65°	1081	1061	1027	997	980	1069
75°	566	559	542	522	529	604
85°	138	135	132	121	118	154
90°	3	35	58	73	79	19
95°	190	94	114	129	126	225
105°	891	979	179	211	223	952
115°	1685	1735	1808	451	240	1659
125°	2382	2421	2476	2497	2506	2125
135°	2948	2995	3021	3051	3045	2277
145°	3420	3417	3467	3487	3472	2139
155°	3766	3739	3775	3792	3769	1735
165°	3968	3950	3959	3980	3959	1121
175°	4058	4038	4044	4064	4035	386
180°	4050	4050	4050	4050	4050	



TEST NUMBER: P906797

CATALOG NUMBER: DFN2DIP-SQ4F0-090D120US835-FLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	3501.9	3501.9	3501.9	3501.9	3501.9
2.5°	3522.3	3505.5	3468.4	3501.9	3495.5
5°	3501.9	3488.7	3451.6	3478.4	3471.9
7.5°	3478.4	3458.4	3421.2	3448.4	3441.6
10°	3441.6	3418.0	3377.6	3404.4	3394.4
12.5°	3390.8	3370.8	3330.5	3347.2	3340.5
15°	3333.7	3313.7	3269.7	3283.3	3266.5
17.5°	3262.9	3242.9	3199.0	3215.8	3199.0
20°	3185.4	3165.4	3118.2	3128.2	3115.0
22.5°	3108.2	3077.9	3033.9	3033.9	3027.1
25°	3017.1	2990.3	2933.2	2939.6	2933.2
27.5°	2916.0	2892.4	2848.9	2838.9	2822.1
30°	2815.3	2788.1	2737.7	2727.7	2714.2
32.5°	2707.4	2687.4	2633.4	2613.1	2599.5
35°	2603.1	2569.5	2515.5	2495.2	2478.4
37.5°	2485.2	2454.8	2400.8	2377.3	2360.5
40°	2364.0	2336.9	2282.9	2252.9	2239.4
42.5°	2246.1	2219.0	2165.4	2131.5	2111.5
45°	2118.2	2094.7	2043.9	2007.1	1993.6
47.5°	1993.6	1970.0	1916.0	1878.9	1858.9
50°	1862.1	1845.3	1798.1	1751.0	1734.2
52.5°	1734.2	1710.6	1667.0	1629.9	1606.3
55°	1603.1	1582.7	1542.3	1502.0	1485.2
57.5°	1471.6	1454.8	1410.9	1370.5	1356.9
60°	1340.1	1326.9	1279.7	1242.6	1232.6
62.5°	1212.2	1188.6	1155.0	1121.5	1107.9
65°	1081.1	1060.7	1027.1	996.8	980.0
67.5°	946.4	929.3	899.2	875.7	862.1
70°	821.7	808.1	777.8	754.2	741.0
72.5°	693.8	680.2	663.4	639.9	629.9
75°	565.6	559.1	542.0	522.0	528.8
77.5°	451.2	437.7	430.9	420.9	410.9
80°	336.9	333.3	326.5	316.5	309.8
82.5°	229.0	229.0	225.8	212.2	212.2
85°	137.9	134.7	131.5	121.1	117.9
87.5°	60.7	53.9	47.2	37.2	33.6
90°	2.8	35.1	58.5	73.4	79.0
92.5°	73.4	61.6	70.3	76.2	79.0
95°	190.3	93.6	114.1	129.1	126.0
97.5°	342.8	102.7	149.3	158.3	161.1
100°	518.8	117.3	167.0	190.3	196.3
102.5°	712.0	706.4	172.9	205.0	214.0
105°	890.8	978.9	178.9	210.9	222.7
107.5°	1098.9	1172.0	184.8	216.8	228.6
110°	1298.3	1359.6	512.9	219.9	231.4



TEST NUMBER: P906797

CATALOG NUMBER: DFN2DIP-SQ4F0-090D120US835-FLLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1485.9	1538.4	1488.7	225.5	234.5
115°	1684.9	1734.7	1808.1	451.3	240.5
117.5°	1857.9	1916.4	1966.5	1547.1	779.5
120°	2051.4	2095.2	2148.1	2183.3	1787.6
122.5°	2215.3	2262.3	2321.1	2338.5	2341.6
125°	2382.3	2420.6	2476.3	2496.8	2505.5
127.5°	2534.7	2575.8	2620.0	2649.2	2652.0
130°	2678.4	2725.4	2757.4	2789.8	2787.0
132.5°	2824.9	2863.2	2895.2	2921.7	2918.9
135°	2948.1	2995.1	3021.2	3050.8	3044.9
137.5°	3076.9	3112.0	3141.6	3170.8	3162.1
140°	3202.9	3226.5	3258.5	3285.0	3270.4
142.5°	3308.6	3329.2	3367.1	3390.4	3375.8
145°	3420.0	3416.9	3466.6	3487.2	3472.5
147.5°	3516.4	3507.7	3557.5	3572.1	3560.6
150°	3610.3	3589.8	3636.8	3654.2	3639.6
152.5°	3689.3	3666.0	3709.9	3727.6	3707.1
155°	3765.5	3739.4	3774.6	3792.0	3768.7
157.5°	3827.1	3803.8	3830.3	3850.8	3827.1
160°	3880.0	3862.3	3880.0	3897.4	3876.9
162.5°	3926.7	3909.3	3923.9	3944.4	3918.0
165°	3967.7	3950.3	3959.0	3979.6	3959.0
167.5°	4000.1	3982.3	3991.4	4011.9	3985.5
170°	4026.5	4008.8	4014.7	4035.2	4008.8
172.5°	4043.9	4026.5	4032.5	4053.0	4026.5
175°	4058.5	4038.0	4043.9	4064.5	4035.2
177.5°	4064.5	4043.9	4047.1	4067.6	4041.2
180°	4049.9	4049.9	4049.9	4049.9	4049.9



TEST NUMBER: P906797  
 CATALOG NUMBER: DFN2DIP-SQ4F0-090D120US835-FLLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.71	10.51	10.73	11.54	12.91	9.27	10.07	10.28	11.09	12.46
	3H	11.37	12.09	12.40	13.13	14.51	10.88	11.60	11.91	12.63	14.02
	4H	11.96	12.64	13.00	13.68	15.07	11.47	12.15	12.51	13.18	14.58
	6H	12.36	12.99	13.41	14.03	15.44	11.86	12.49	12.91	13.53	14.94
	8H	12.47	13.06	13.52	14.12	15.52	11.96	12.56	13.02	13.62	15.02
	12H	12.51	13.08	13.57	14.13	15.56	12.00	12.57	13.06	13.62	15.05
4H	2H	10.17	10.85	11.21	11.88	13.28	9.81	10.49	10.86	11.53	12.93
	3H	12.03	12.60	13.09	13.66	15.07	11.63	12.19	12.68	13.26	14.67
	4H	12.75	13.27	13.81	14.32	15.76	12.32	12.84	13.38	13.90	15.33
	6H	13.26	13.71	14.33	14.79	16.22	12.83	13.28	13.90	14.36	15.78
	8H	13.41	13.83	14.48	14.90	16.35	12.98	13.39	14.05	14.47	15.91
	12H	13.49	13.86	14.57	14.95	16.40	13.04	13.41	14.12	14.50	15.95
8H	4H	12.94	13.36	14.01	14.43	15.87	12.56	12.98	13.63	14.05	15.49
	6H	13.57	13.92	14.67	15.03	16.47	13.19	13.54	14.28	14.65	16.09
	8H	13.80	14.10	14.90	15.20	16.65	13.40	13.71	14.50	14.80	16.26
	12H	13.93	14.19	15.03	15.29	16.78	13.52	13.78	14.62	14.88	16.37
12H	4H	12.92	13.30	14.01	14.39	15.83	12.55	12.93	13.64	14.02	15.47
	6H	13.60	13.91	14.70	15.00	16.46	13.23	13.53	14.33	14.63	16.09
	8H	13.85	14.11	14.95	15.20	16.70	13.47	13.73	14.57	14.82	16.32