

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906831

Luminaire Tested: DFN2DIP-SQ4F0-100D110US835-RLLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P906831  
REPORT IS A COMBINATION OF REPORTS P901678 AND P898471  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ4F0-100D110US835-RLLONL  
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 19389.9 lumens  
Efficiency: N/A  
Efficacy: 110.5 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 175.5  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9968  
Total Harmonic Distortion (THDi): 0.064  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P906831  
CATALOG NUMBER: DFN2DIP-SQ4F0-100D110US835-RLLONL

### Luminous Intensity Polar Plot

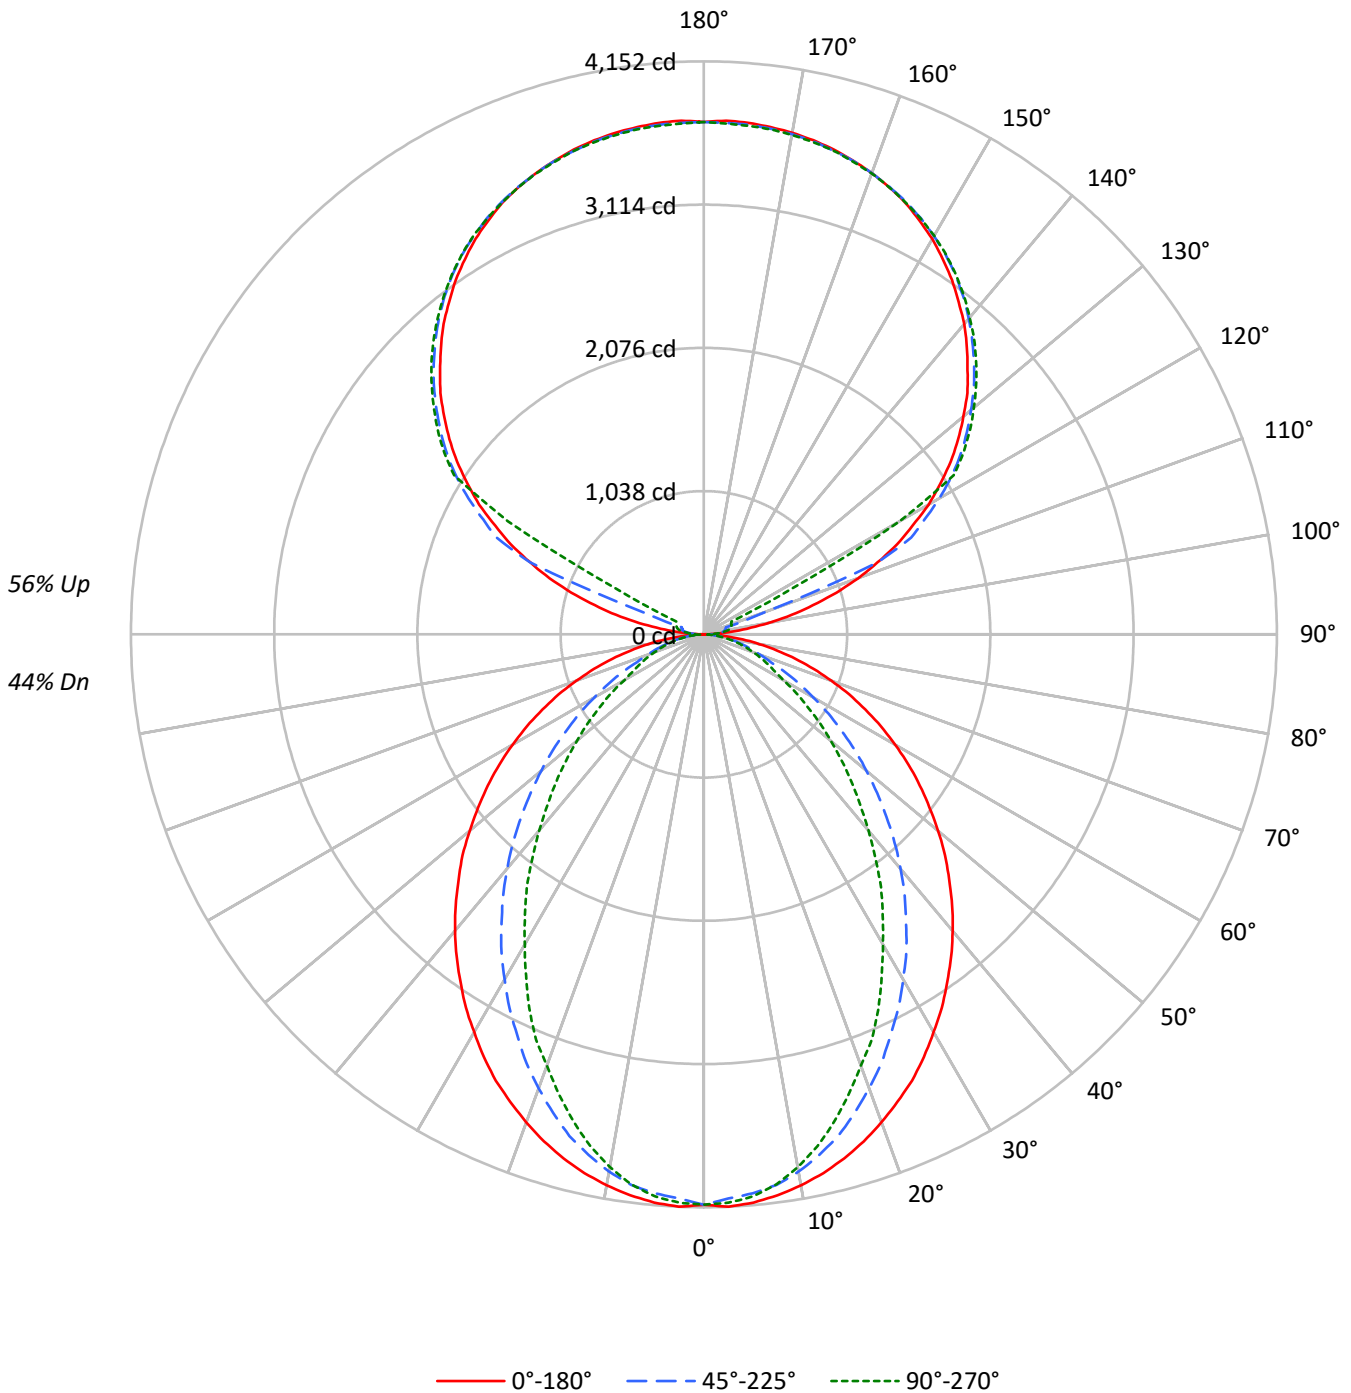



TEST NUMBER: P906831

CATALOG NUMBER: DFN2DIP-SQ4F0-100D110US835-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	50	50	50	44				44
1	97	93	89	86	89	85	82	79	71	68	66	57	56	55	45	44	43	38				38
2	89	81	76	71	81	75	70	66	62	59	56	51	48	46	40	39	37	32				32
3	81	72	65	59	74	66	60	55	55	51	47	45	42	40	36	34	32	28				28
4	74	64	56	51	68	59	52	47	49	45	41	41	37	34	33	30	28	24				24
5	68	57	49	44	62	53	46	41	44	39	35	37	33	30	30	27	25	21				21
6	63	51	44	38	58	47	41	36	40	35	31	33	29	26	27	24	22	19				19
7	58	46	39	33	53	43	36	31	37	31	27	30	26	24	25	22	20	17				17
8	54	42	35	30	50	39	33	28	33	28	24	28	24	21	23	20	18	15				15
9	50	39	31	26	46	36	29	25	31	26	22	26	22	19	21	18	16	14				14
10	47	35	28	24	43	33	27	22	28	23	20	24	20	17	20	17	15	13				13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2900	2900	2900
5°	2905	2855	2873
10°	2876	2799	2780
15°	2836	2707	2637
20°	2784	2580	2460
25°	2730	2438	2289
30°	2658	2292	2073
35°	2587	2134	1882
40°	2516	1972	1664
45°	2432	1791	1466
50°	2346	1609	1272
55°	2256	1414	1086
60°	2151	1210	895
65°	2031	1003	806
70°	1886	809	731
75°	1703	715	667
80°	1438	602	581
85°	1002	405	442

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2432 cd/sqm



TEST NUMBER: P906831

CATALOG NUMBER: DFN2DIP-SQ4F0-100D110US835-RLLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	387.3	2.0
10°-20°	1063.3	5.5
20°-30°	1492.9	7.7
30°-40°	1627.4	8.4
40°-50°	1495.7	7.7
50°-60°	1174.7	6.1
60°-70°	764.6	3.9
70°-80°	393.6	2.0
80°-90°	107.0	0.6
90°-100°	122.4	0.6
100°-110°	456.3	2.4
110°-120°	1210.3	6.2
120°-130°	2007.3	10.4
130°-140°	2132.2	11.0
140°-150°	1981.7	10.2
150°-160°	1593.2	8.2
160°-170°	1026.6	5.3
170°-180°	353.3	1.8
0°-30°	2943.6	15.2
0°-40°	4571.0	23.6
0°-60°	7241.3	37.3
0°-90°	8506.5	43.9
90°-120°	1789.0	9.2
90°-150°	7910.3	40.8
90°-180°	10883.0	56.1
0°-180°	19389.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	4133	4133	4133	4133	4133	
5°	4133	4114	4066	4099	4088	392
15°	3931	3890	3763	3692	3654	1108
25°	3568	3448	3202	3048	2992	1641
35°	3075	2884	2555	2319	2236	1924
45°	2514	2263	1870	1604	1515	1941
55°	1911	1620	1216	991	920	1708
65°	1290	987	651	524	512	1279
75°	688	426	299	273	269	728
85°	161	82	71	71	71	184
90°	3	32	54	67	72	18
95°	174	86	105	118	116	207
105°	817	897	164	193	204	873
115°	1544	1590	1658	414	220	1521
125°	2184	2219	2270	2289	2297	1948
135°	2702	2746	2769	2797	2791	2088
145°	3135	3132	3178	3197	3183	1961
155°	3452	3428	3460	3476	3455	1591
165°	3637	3621	3629	3648	3629	1028
175°	3720	3702	3707	3726	3699	354
180°	3712	3712	3712	3712	3712	



TEST NUMBER: P906831

CATALOG NUMBER: DFN2DIP-SQ4F0-100D110US835-RLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	4133.0	4133.0	4133.0	4133.0	4133.0
2.5°	4151.6	4133.0	4091.7	4129.4	4121.9
5°	4133.0	4114.3	4065.5	4099.3	4088.1
7.5°	4099.3	4077.0	4024.6	4039.3	4020.7
10°	4054.4	4028.2	3953.6	3942.1	3919.9
12.5°	3998.5	3964.7	3863.5	3841.3	3800.0
15°	3931.0	3889.7	3762.7	3691.7	3654.4
17.5°	3852.4	3792.5	3635.4	3553.2	3493.3
20°	3762.7	3687.7	3500.8	3407.6	3325.0
22.5°	3665.5	3579.4	3362.3	3235.4	3179.4
25°	3568.3	3448.5	3201.6	3048.4	2992.1
27.5°	3452.4	3325.0	3052.0	2876.2	2790.1
30°	3329.0	3186.5	2887.3	2696.9	2595.7
32.5°	3209.2	3036.9	2730.6	2506.0	2412.3
35°	3074.6	2883.8	2554.8	2319.1	2236.5
37.5°	2943.7	2737.7	2390.1	2131.8	2038.5
40°	2805.2	2581.0	2217.9	1952.4	1855.2
42.5°	2663.1	2423.8	2046.1	1769.1	1675.8
45°	2513.5	2262.7	1870.3	1604.4	1514.7
47.5°	2371.5	2106.0	1702.0	1436.1	1354.0
50°	2214.3	1948.8	1537.3	1279.0	1200.8
52.5°	2060.7	1780.2	1380.2	1133.3	1062.3
55°	1911.1	1619.5	1215.5	991.3	920.2
57.5°	1758.0	1458.7	1069.9	860.3	800.4
60°	1600.8	1301.6	916.3	725.8	665.9
62.5°	1447.6	1148.4	785.3	606.0	576.2
65°	1290.5	987.3	650.8	523.8	512.3
67.5°	1140.9	837.7	523.8	459.9	448.8
70°	983.7	692.1	433.7	396.4	381.4
72.5°	834.1	557.1	362.7	332.9	325.4
75°	688.1	426.2	299.2	273.0	269.4
77.5°	542.5	302.8	235.7	220.6	213.1
80°	407.5	217.1	179.4	164.7	164.7
82.5°	284.1	146.0	123.4	115.9	115.9
85°	160.7	82.1	71.0	71.0	71.0
87.5°	59.9	29.8	29.8	26.2	26.2
90°	2.6	32.2	53.6	67.3	72.4
92.5°	67.3	56.5	64.4	69.9	72.4
95°	174.5	85.8	104.6	118.3	115.5
97.5°	314.2	94.1	136.8	145.1	147.7
100°	475.6	107.5	153.1	174.5	179.9
102.5°	652.6	647.5	158.5	187.9	196.2
105°	816.6	897.3	164.0	193.3	204.2
107.5°	1007.4	1074.3	169.4	198.7	209.6
110°	1190.1	1246.3	470.2	201.6	212.1



TEST NUMBER: P906831

CATALOG NUMBER: DFN2DIP-SQ4F0-100D110US835-RLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1362.1	1410.2	1364.6	206.7	215.0
115°	1544.5	1590.1	1657.5	413.7	220.4
117.5°	1703.1	1756.7	1802.6	1418.2	714.5
120°	1880.4	1920.6	1969.1	2001.3	1638.6
122.5°	2030.7	2073.7	2127.6	2143.6	2146.5
125°	2183.8	2218.9	2269.9	2288.7	2296.7
127.5°	2323.5	2361.1	2401.6	2428.4	2431.0
130°	2455.2	2498.3	2527.6	2557.3	2554.8
132.5°	2589.5	2624.6	2654.0	2678.2	2675.7
135°	2702.5	2745.5	2769.4	2796.6	2791.1
137.5°	2820.5	2852.7	2879.8	2906.6	2898.6
140°	2936.0	2957.6	2987.0	3011.2	2997.8
142.5°	3032.9	3051.7	3086.5	3107.9	3094.5
145°	3135.0	3132.1	3177.7	3196.6	3183.2
147.5°	3223.4	3215.4	3261.0	3274.4	3263.9
150°	3309.5	3290.7	3333.7	3349.7	3336.3
152.5°	3381.9	3360.5	3400.7	3417.0	3398.2
155°	3451.8	3427.8	3460.0	3476.0	3454.6
157.5°	3508.2	3486.8	3511.1	3529.9	3508.2
160°	3556.7	3540.4	3556.7	3572.6	3553.8
162.5°	3599.4	3583.5	3596.9	3615.7	3591.5
165°	3637.1	3621.1	3629.1	3647.9	3629.1
167.5°	3666.7	3650.5	3658.8	3677.6	3653.4
170°	3691.0	3674.7	3680.1	3699.0	3674.7
172.5°	3706.9	3691.0	3696.4	3715.2	3691.0
175°	3720.3	3701.5	3706.9	3725.8	3699.0
177.5°	3725.8	3706.9	3709.8	3728.6	3704.4
180°	3712.4	3712.4	3712.4	3712.4	3712.4



TEST NUMBER: P906831  
 CATALOG NUMBER: DFN2DIP-SQ4F0-100D110US835-RLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.26	11.04	11.27	12.06	13.42	6.22	7.00	7.23	8.02	9.38
	3H	11.94	12.64	12.96	13.66	15.04	7.40	8.10	8.43	9.13	10.51
	4H	12.55	13.21	13.58	14.24	15.63	7.85	8.52	8.89	9.55	10.93
	6H	12.97	13.58	14.02	14.61	16.01	8.17	8.78	9.22	9.82	11.22
	8H	13.10	13.68	14.15	14.73	16.12	8.26	8.84	9.31	9.89	11.29
	12H	13.16	13.71	14.21	14.75	16.17	8.30	8.85	9.36	9.90	11.32
4H	2H	10.27	10.93	11.31	11.96	13.35	6.81	7.47	7.85	8.50	9.89
	3H	12.10	12.65	13.15	13.71	15.11	8.16	8.71	9.21	9.77	11.17
	4H	12.79	13.30	13.85	14.35	15.77	8.70	9.21	9.76	10.26	11.68
	6H	13.31	13.74	14.38	14.82	16.23	9.12	9.55	10.19	10.63	12.05
	8H	13.49	13.89	14.55	14.96	16.39	9.25	9.65	10.32	10.72	12.15
	12H	13.58	13.95	14.67	15.03	16.46	9.31	9.68	10.40	10.76	12.20
8H	4H	12.76	13.16	13.83	14.23	15.66	8.98	9.39	10.05	10.45	11.89
	6H	13.33	13.66	14.42	14.77	16.20	9.50	9.83	10.59	10.94	12.37
	8H	13.55	13.84	14.64	14.93	16.38	9.69	9.99	10.79	11.08	12.53
	12H	13.69	13.94	14.79	15.03	16.52	9.81	10.07	10.91	11.15	12.64
12H	4H	12.71	13.07	13.79	14.15	15.59	8.99	9.35	10.07	10.43	11.87
	6H	13.30	13.60	14.40	14.69	16.14	9.55	9.84	10.65	10.94	12.38
	8H	13.52	13.78	14.62	14.87	16.36	9.76	10.02	10.86	11.11	12.59