

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906883

Luminaire Tested: DFN2DIP-SQ4F0-120D060US835-RLLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P906883  
REPORT IS A COMBINATION OF REPORTS P901592 AND P898471  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ4F0-120D060US835-RLLONL  
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 16140.0 lumens  
Efficiency: N/A  
Efficacy: 99.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')  
CIE Type: Semi-Direct  
  
Input Watts (W): 162.8  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9933  
Total Harmonic Distortion (THDi): 0.066  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P906883  
CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US835-RLLONL

### Luminous Intensity Polar Plot

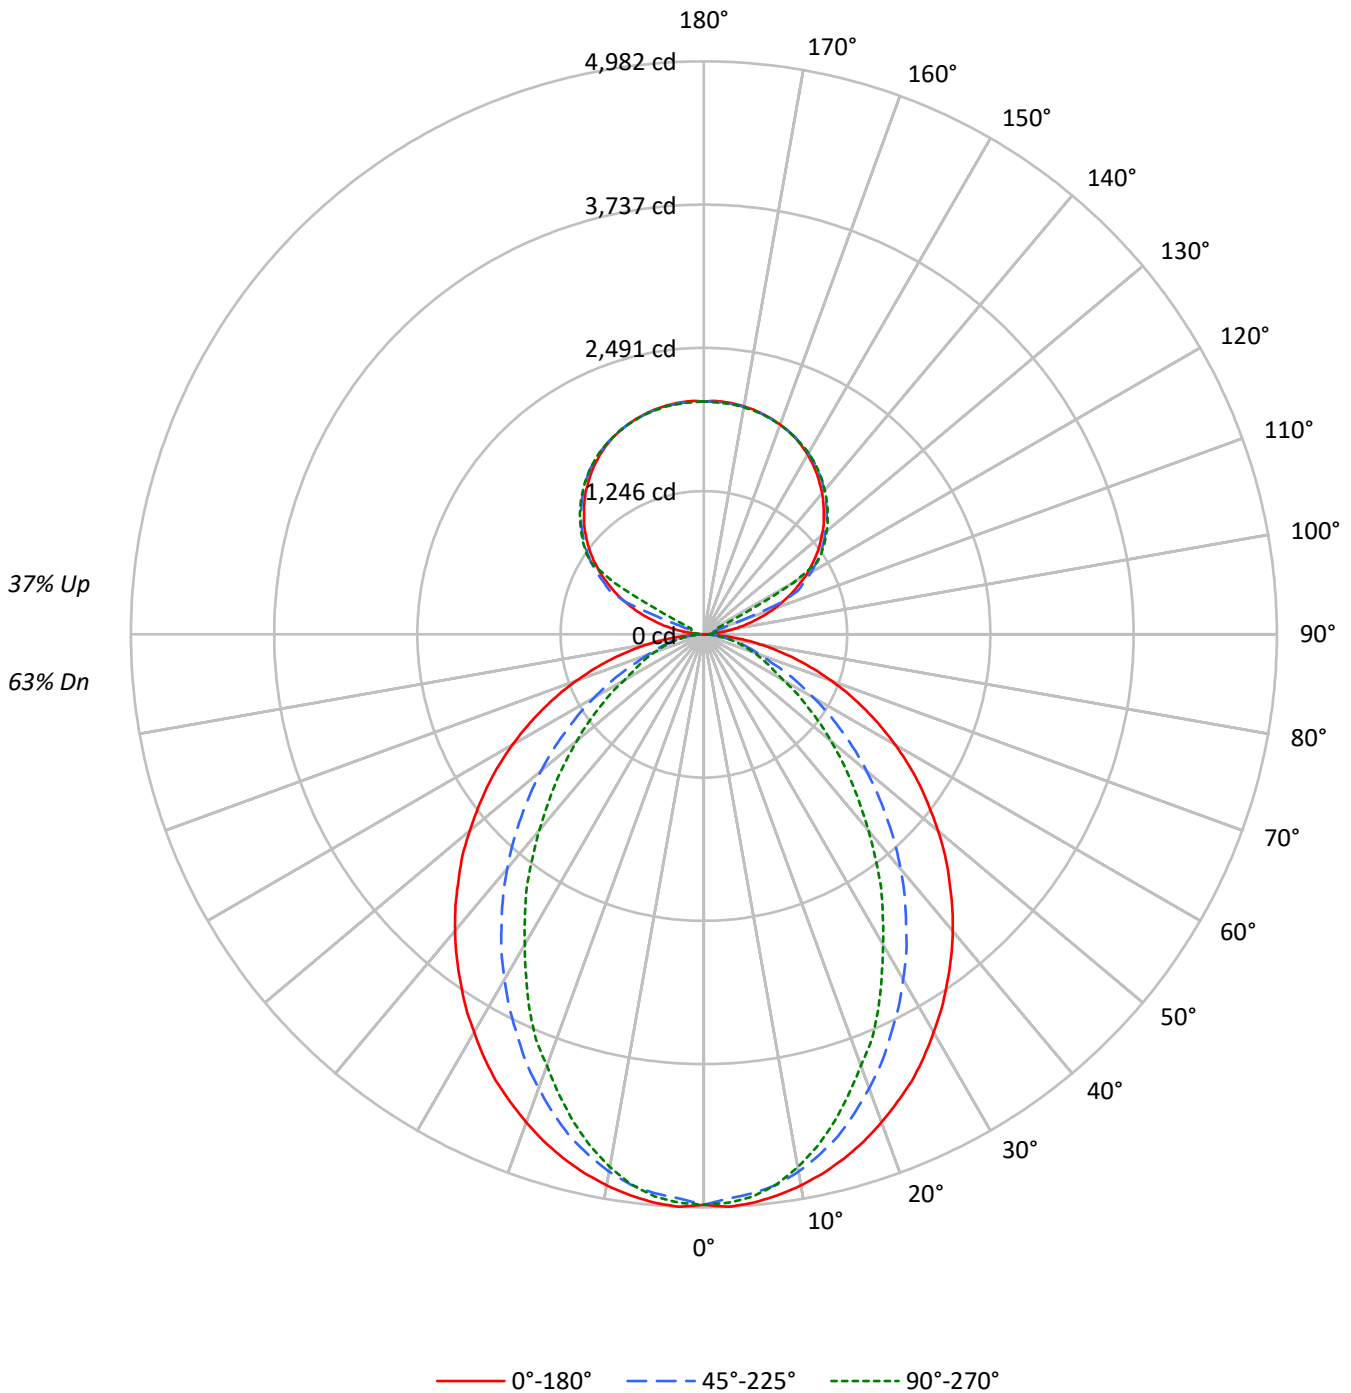



TEST NUMBER: P906883

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US835-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68	68	68	68	63
1	101	97	93	90	95	91	88	85	80	78	76	71	69	67	61	60	59	61	60	59	54
2	93	86	80	75	87	81	75	71	71	67	64	63	60	57	55	52	51	55	52	51	47
3	85	76	69	63	80	72	65	60	63	58	54	56	52	49	49	46	44	49	46	44	40
4	78	68	60	54	73	64	57	52	57	51	47	50	46	43	44	41	38	44	41	38	35
5	72	61	53	47	67	57	50	45	51	45	41	46	41	37	40	37	34	40	37	34	31
6	67	55	47	41	62	52	45	39	46	41	36	41	37	33	37	33	30	37	33	30	27
7	62	50	42	36	58	47	40	35	42	36	32	38	33	30	34	30	27	34	30	27	25
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	27	24	31	27	24	22
9	54	42	34	29	51	40	33	28	36	30	26	32	27	24	29	25	22	29	25	22	20
10	50	38	31	26	47	37	30	25	33	28	24	30	25	22	27	23	20	27	23	20	18

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3480	3480	3480
5°	3486	3425	3448
10°	3451	3359	3337
15°	3403	3249	3164
20°	3341	3096	2952
25°	3276	2925	2747
30°	3190	2750	2487
35°	3105	2561	2259
40°	3019	2366	1996
45°	2919	2149	1759
50°	2815	1931	1527
55°	2707	1697	1303
60°	2582	1452	1074
65°	2438	1204	968
70°	2263	971	877
75°	2044	858	800
80°	1726	722	697
85°	1202	486	531

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2919 cd/sqm



TEST NUMBER: P906883

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US835-RLLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	464.8	2.9
10°-20°	1276.0	7.9
20°-30°	1791.5	11.1
30°-40°	1952.8	12.1
40°-50°	1794.9	11.1
50°-60°	1409.6	8.7
60°-70°	917.5	5.7
70°-80°	472.3	2.9
80°-90°	124.1	0.8
90°-100°	66.8	0.4
100°-110°	248.9	1.5
110°-120°	660.2	4.1
120°-130°	1094.9	6.8
130°-140°	1163.0	7.2
140°-150°	1080.9	6.7
150°-160°	869.0	5.4
160°-170°	560.0	3.5
170°-180°	192.7	1.2
0°-30°	3532.3	21.9
0°-40°	5485.2	34.0
0°-60°	8689.6	53.8
0°-90°	10203.6	63.2
90°-120°	975.8	6.0
90°-150°	4314.7	26.7
90°-180°	5936.0	36.8
0°-180°	16140.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	4960	4960	4960	4960	4960	
5°	4960	4937	4879	4919	4906	470
15°	4717	4668	4515	4430	4385	1329
25°	4282	4138	3842	3658	3590	1969
35°	3690	3460	3066	2783	2684	2309
45°	3016	2715	2244	1925	1818	2329
55°	2293	1943	1459	1190	1104	2049
65°	1549	1185	781	629	615	1535
75°	826	511	359	328	323	873
85°	193	99	85	85	85	221
90°	1	18	29	37	40	15
95°	95	47	57	65	63	113
105°	445	489	89	105	111	476
115°	842	867	904	226	120	829
125°	1191	1210	1238	1248	1253	1062
135°	1474	1498	1511	1525	1522	1139
145°	1710	1708	1733	1744	1736	1069
155°	1883	1870	1887	1896	1884	868
165°	1984	1975	1980	1990	1980	560
175°	2029	2019	2022	2032	2018	193
180°	2025	2025	2025	2025	2025	



TEST NUMBER: P906883

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US835-RLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	4959.6	4959.6	4959.6	4959.6	4959.6
2.5°	4982.0	4959.6	4910.1	4955.3	4946.2
5°	4959.6	4937.2	4878.6	4919.1	4905.8
7.5°	4919.1	4892.4	4829.6	4847.2	4824.8
10°	4865.3	4833.9	4744.3	4730.5	4703.9
12.5°	4798.1	4757.7	4636.2	4609.6	4560.1
15°	4717.2	4667.7	4515.3	4430.0	4385.3
17.5°	4622.9	4551.0	4362.4	4263.9	4192.0
20°	4515.3	4425.3	4201.0	4089.1	3990.0
22.5°	4398.6	4295.3	4034.8	3882.4	3815.3
25°	4282.0	4138.1	3841.9	3658.1	3590.5
27.5°	4142.9	3990.0	3662.4	3451.5	3348.1
30°	3994.8	3823.9	3464.8	3236.2	3114.8
32.5°	3851.0	3644.3	3276.7	3007.2	2894.8
35°	3689.6	3460.5	3065.7	2782.9	2683.8
37.5°	3532.4	3285.3	2868.1	2558.1	2446.2
40°	3366.2	3097.2	2661.5	2342.9	2226.2
42.5°	3195.7	2908.6	2455.3	2122.9	2011.0
45°	3016.2	2715.3	2244.3	1925.3	1817.6
47.5°	2845.7	2527.2	2042.4	1723.4	1624.8
50°	2657.2	2338.6	1844.8	1534.8	1441.0
52.5°	2472.9	2136.2	1656.2	1360.0	1274.8
55°	2293.4	1943.4	1458.6	1189.5	1104.3
57.5°	2109.5	1750.5	1283.8	1032.4	960.5
60°	1921.0	1561.9	1099.5	871.0	799.1
62.5°	1737.2	1378.1	942.4	727.2	691.4
65°	1548.6	1184.8	781.0	628.6	614.8
67.5°	1369.1	1005.2	628.6	551.9	538.6
70°	1180.5	830.5	520.5	475.7	457.6
72.5°	1001.0	668.6	435.2	399.5	390.5
75°	825.7	511.4	359.1	327.6	323.3
77.5°	651.0	363.3	282.9	264.8	255.7
80°	489.1	260.5	215.2	197.6	197.6
82.5°	341.0	175.2	148.1	139.0	139.0
85°	192.9	98.6	85.2	85.2	85.2
87.5°	71.9	35.7	35.7	31.4	31.4
90°	1.4	17.6	29.2	36.7	39.5
92.5°	36.7	30.8	35.1	38.1	39.5
95°	95.2	46.8	57.1	64.6	63.0
97.5°	171.4	51.3	74.6	79.2	80.6
100°	259.4	58.6	83.5	95.2	98.1
102.5°	356.0	353.2	86.5	102.5	107.0
105°	445.4	489.4	89.4	105.4	111.4
107.5°	549.5	586.0	92.4	108.4	114.3
110°	649.2	679.8	256.5	110.0	115.7



TEST NUMBER: P906883

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US835-RLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	742.9	769.2	744.3	112.7	117.3
115°	842.5	867.4	904.1	225.7	120.2
117.5°	928.9	958.2	983.2	773.6	389.7
120°	1025.7	1047.6	1074.1	1091.6	893.8
122.5°	1107.6	1131.1	1160.5	1169.2	1170.8
125°	1191.2	1210.3	1238.1	1248.4	1252.7
127.5°	1267.4	1287.9	1310.0	1324.6	1326.0
130°	1339.2	1362.7	1378.7	1394.9	1393.5
132.5°	1412.5	1431.6	1447.6	1460.8	1459.4
135°	1474.1	1497.6	1510.6	1525.4	1522.4
137.5°	1538.4	1556.0	1570.8	1585.4	1581.1
140°	1601.4	1613.3	1629.3	1642.5	1635.2
142.5°	1654.3	1664.6	1683.6	1695.2	1687.9
145°	1710.0	1708.4	1733.3	1743.6	1736.3
147.5°	1758.2	1753.8	1778.7	1786.0	1780.3
150°	1805.2	1794.9	1818.4	1827.1	1819.8
152.5°	1844.7	1833.0	1854.9	1863.8	1853.5
155°	1882.8	1869.7	1887.3	1896.0	1884.3
157.5°	1913.6	1901.9	1915.1	1925.4	1913.6
160°	1940.0	1931.1	1940.0	1948.7	1938.5
162.5°	1963.3	1954.6	1961.9	1972.2	1959.0
165°	1983.9	1975.2	1979.5	1989.8	1979.5
167.5°	2000.0	1991.2	1995.7	2006.0	1992.7
170°	2013.3	2004.4	2007.4	2017.6	2004.4
172.5°	2022.0	2013.3	2016.2	2026.5	2013.3
175°	2029.3	2019.0	2022.0	2032.2	2017.6
177.5°	2032.2	2022.0	2023.5	2033.8	2020.6
180°	2024.9	2024.9	2024.9	2024.9	2024.9



TEST NUMBER: P906883  
 CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US835-RLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.64	13.60	13.49	14.45	15.53	8.61	9.56	9.45	10.42	11.49
	3H	14.34	15.19	15.19	16.06	17.15	9.80	10.65	10.66	11.52	12.62
	4H	14.95	15.76	15.82	16.63	17.74	10.26	11.06	11.13	11.94	13.05
	6H	15.38	16.12	16.27	17.01	18.13	10.59	11.33	11.47	12.21	13.33
	8H	15.52	16.22	16.41	17.12	18.24	10.68	11.38	11.57	12.28	13.41
	12H	15.58	16.25	16.48	17.15	18.29	10.73	11.40	11.63	12.29	13.44
4H	2H	12.68	13.48	13.55	14.36	15.47	9.22	10.02	10.09	10.90	12.01
	3H	14.52	15.19	15.41	16.10	17.22	10.58	11.25	11.47	12.15	13.28
	4H	15.22	15.83	16.12	16.73	17.88	11.13	11.74	12.03	12.64	13.79
	6H	15.75	16.27	16.66	17.20	18.35	11.56	12.08	12.47	13.01	14.16
	8H	15.93	16.42	16.84	17.34	18.50	11.69	12.18	12.61	13.10	14.27
	12H	16.03	16.47	16.97	17.41	18.58	11.76	12.20	12.70	13.14	14.31
8H	4H	15.20	15.69	16.12	16.61	17.78	11.42	11.91	12.34	12.83	14.00
	6H	15.77	16.18	16.72	17.14	18.31	11.95	12.35	12.89	13.32	14.48
	8H	15.99	16.35	16.95	17.31	18.49	12.14	12.50	13.09	13.45	14.64
	12H	16.14	16.46	17.10	17.40	18.64	12.27	12.58	13.22	13.53	14.76
12H	4H	15.16	15.60	16.09	16.54	17.71	11.44	11.87	12.37	12.82	13.99
	6H	15.75	16.11	16.70	17.06	18.25	12.00	12.36	12.95	13.31	14.49
	8H	15.98	16.29	16.93	17.24	18.47	12.22	12.53	13.17	13.48	14.71