

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906901

Luminaire Tested: DFN2DIP-SQ4F0-120D110US835-FLLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P906901  
REPORT IS A COMBINATION OF REPORTS P901681 AND P898471  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ4F0-120D110US835-FLLONL  
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 22770.0 lumens  
Efficiency: N/A  
Efficacy: 113.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 200.4  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9933  
Total Harmonic Distortion (THDi): 0.066  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P906901  
CATALOG NUMBER: DFN2DIP-SQ4F0-120D110US835-FLLONL

### Luminous Intensity Polar Plot

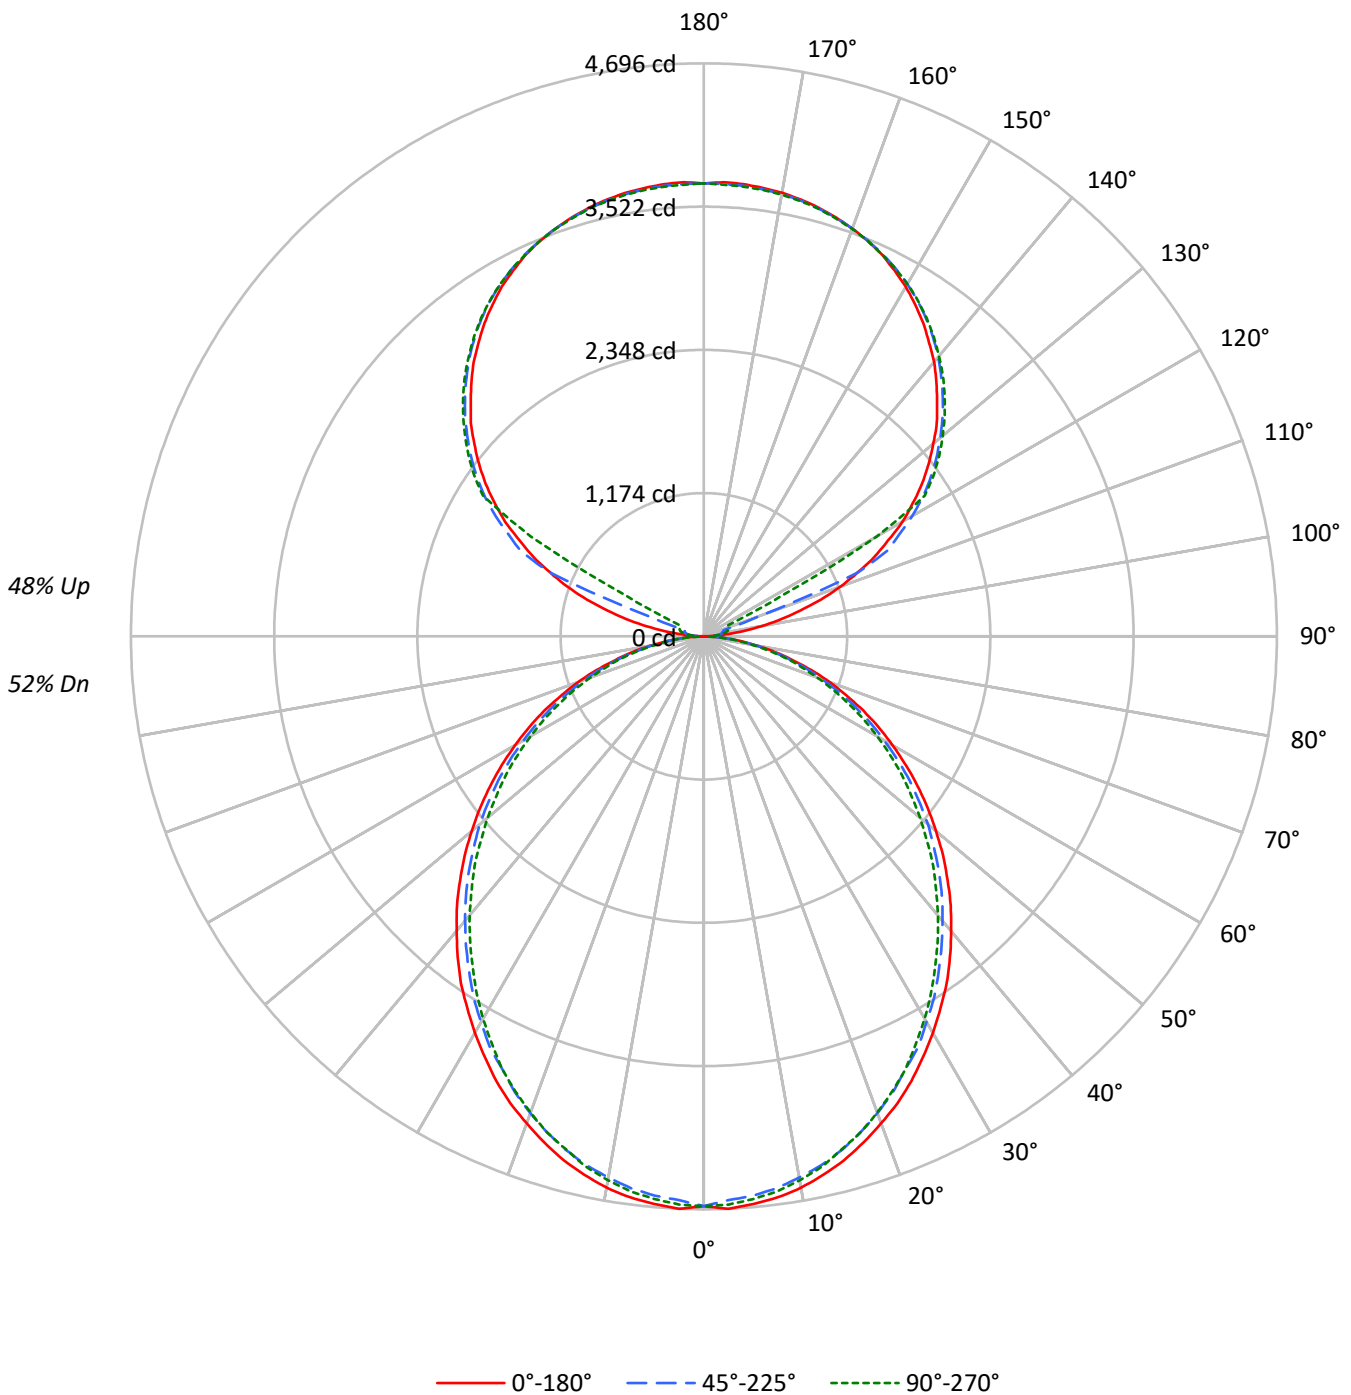



TEST NUMBER: P906901

CATALOG NUMBER: DFN2DIP-SQ4F0-120D110US835-FLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	58	58	58	52		
1	98	94	90	87	91	87	84	81	74	72	69	62	61	59	51	50	49	44		
2	89	82	76	71	83	76	71	66	65	61	58	55	52	49	45	43	41	37		
3	82	72	65	59	75	67	61	55	57	52	48	48	45	42	40	37	35	31		
4	75	64	56	50	69	59	52	47	51	46	41	43	39	36	36	33	30	27		
5	69	57	49	43	63	53	46	40	46	40	36	39	34	31	32	29	26	23		
6	63	51	43	37	58	48	40	35	41	35	31	35	31	27	29	26	23	20		
7	58	46	38	33	54	43	36	31	37	32	27	32	27	24	27	23	21	18		
8	54	42	34	29	50	39	32	27	34	28	24	29	25	21	25	21	19	16		
9	51	38	31	26	47	36	29	24	31	26	22	27	22	19	23	19	17	15		
10	47	35	28	23	44	33	26	22	29	23	20	25	21	17	21	18	15	13		

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3276	3276	3276
5°	3282	3231	3253
10°	3255	3188	3210
15°	3207	3137	3142
20°	3142	3064	3073
25°	3078	2978	2992
30°	2997	2897	2890
35°	2921	2802	2781
40°	2827	2706	2678
45°	2733	2610	2572
50°	2630	2509	2449
55°	2523	2392	2337
60°	2401	2254	2209
65°	2269	2110	2057
70°	2100	1935	1894
75°	1867	1726	1745
80°	1586	1460	1458
85°	1146	999	980

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2733 cd/sqm



TEST NUMBER: P906901

CATALOG NUMBER: DFN2DIP-SQ4F0-120D110US835-FLLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	439.5	1.9
10°-20°	1236.5	5.4
20°-30°	1817.2	8.0
30°-40°	2110.5	9.3
40°-50°	2107.9	9.3
50°-60°	1838.0	8.1
60°-70°	1358.7	6.0
70°-80°	768.7	3.4
80°-90°	209.4	0.9
90°-100°	122.4	0.5
100°-110°	456.3	2.0
110°-120°	1210.3	5.3
120°-130°	2007.3	8.8
130°-140°	2132.2	9.4
140°-150°	1981.7	8.7
150°-160°	1593.2	7.0
160°-170°	1026.6	4.5
170°-180°	353.3	1.6
0°-30°	3493.1	15.3
0°-40°	5603.7	24.6
0°-60°	9549.6	41.9
0°-90°	11886.5	52.2
90°-120°	1789.0	7.9
90°-150°	7910.3	34.7
90°-180°	10883.0	47.8
0°-180°	22770.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	4669	4669	4669	4669	4669	
5°	4669	4652	4602	4638	4629	443
15°	4445	4418	4360	4378	4355	1252
25°	4023	3987	3911	3920	3911	1851
35°	3471	3426	3354	3327	3304	2167
45°	2824	2793	2725	2676	2658	2180
55°	2137	2110	2056	2003	1980	1911
65°	1442	1414	1370	1329	1307	1425
75°	754	746	723	696	705	805
85°	184	180	175	162	157	205
90°	3	32	54	67	72	21
95°	174	86	105	118	116	207
105°	817	897	164	193	204	873
115°	1544	1590	1658	414	220	1521
125°	2184	2219	2270	2289	2297	1948
135°	2702	2746	2769	2797	2791	2088
145°	3135	3132	3178	3197	3183	1961
155°	3452	3428	3460	3476	3455	1591
165°	3637	3621	3629	3648	3629	1028
175°	3720	3702	3707	3726	3699	354
180°	3712	3712	3712	3712	3712	



TEST NUMBER: P906901

CATALOG NUMBER: DFN2DIP-SQ4F0-120D110US835-FLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	4669.3	4669.3	4669.3	4669.3	4669.3
2.5°	4696.4	4674.0	4624.5	4669.3	4660.7
5°	4669.3	4651.6	4602.1	4637.8	4629.2
7.5°	4637.8	4611.1	4561.6	4597.8	4588.8
10°	4588.8	4557.3	4503.5	4539.2	4525.9
12.5°	4521.1	4494.4	4440.6	4463.0	4453.9
15°	4444.9	4418.2	4359.6	4377.7	4355.3
17.5°	4350.6	4323.9	4265.3	4287.7	4265.3
20°	4247.2	4220.5	4157.7	4171.0	4153.4
22.5°	4144.3	4103.8	4045.2	4045.2	4036.2
25°	4022.8	3987.1	3910.9	3919.5	3910.9
27.5°	3888.0	3856.6	3798.5	3785.1	3762.8
30°	3753.7	3717.5	3650.3	3637.0	3618.9
32.5°	3609.8	3583.2	3511.2	3484.1	3466.0
35°	3470.7	3426.0	3354.0	3326.9	3304.5
37.5°	3313.5	3273.1	3201.1	3169.7	3147.3
40°	3152.1	3115.9	3043.9	3003.9	2985.8
42.5°	2994.9	2958.7	2887.2	2842.0	2815.3
45°	2824.3	2792.9	2725.2	2676.2	2658.1
47.5°	2658.1	2626.6	2554.7	2505.2	2478.5
50°	2482.8	2460.4	2397.5	2334.6	2312.2
52.5°	2312.2	2280.8	2222.7	2173.1	2141.7
55°	2137.4	2110.3	2056.4	2002.6	1980.2
57.5°	1962.1	1939.7	1881.1	1827.3	1809.2
60°	1786.8	1769.2	1706.3	1656.8	1643.4
62.5°	1616.3	1584.8	1540.1	1495.3	1477.2
65°	1441.5	1414.3	1369.5	1329.0	1306.7
67.5°	1261.9	1239.0	1199.0	1167.6	1149.5
70°	1095.6	1077.5	1037.0	1005.6	988.0
72.5°	925.1	907.0	884.6	853.2	839.8
75°	754.1	745.5	722.6	696.0	705.0
77.5°	601.6	583.5	574.5	561.1	547.8
80°	449.2	444.4	435.4	422.1	413.0
82.5°	305.3	305.3	301.1	283.0	283.0
85°	183.9	179.6	175.3	161.5	157.2
87.5°	81.0	71.9	62.9	49.5	44.8
90°	2.6	32.2	53.6	67.3	72.4
92.5°	67.3	56.5	64.4	69.9	72.4
95°	174.5	85.8	104.6	118.3	115.5
97.5°	314.2	94.1	136.8	145.1	147.7
100°	475.6	107.5	153.1	174.5	179.9
102.5°	652.6	647.5	158.5	187.9	196.2
105°	816.6	897.3	164.0	193.3	204.2
107.5°	1007.4	1074.3	169.4	198.7	209.6
110°	1190.1	1246.3	470.2	201.6	212.1



TEST NUMBER: P906901

CATALOG NUMBER: DFN2DIP-SQ4F0-120D110US835-FLLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1362.1	1410.2	1364.6	206.7	215.0
115°	1544.5	1590.1	1657.5	413.7	220.4
117.5°	1703.1	1756.7	1802.6	1418.2	714.5
120°	1880.4	1920.6	1969.1	2001.3	1638.6
122.5°	2030.7	2073.7	2127.6	2143.6	2146.5
125°	2183.8	2218.9	2269.9	2288.7	2296.7
127.5°	2323.5	2361.1	2401.6	2428.4	2431.0
130°	2455.2	2498.3	2527.6	2557.3	2554.8
132.5°	2589.5	2624.6	2654.0	2678.2	2675.7
135°	2702.5	2745.5	2769.4	2796.6	2791.1
137.5°	2820.5	2852.7	2879.8	2906.6	2898.6
140°	2936.0	2957.6	2987.0	3011.2	2997.8
142.5°	3032.9	3051.7	3086.5	3107.9	3094.5
145°	3135.0	3132.1	3177.7	3196.6	3183.2
147.5°	3223.4	3215.4	3261.0	3274.4	3263.9
150°	3309.5	3290.7	3333.7	3349.7	3336.3
152.5°	3381.9	3360.5	3400.7	3417.0	3398.2
155°	3451.8	3427.8	3460.0	3476.0	3454.6
157.5°	3508.2	3486.8	3511.1	3529.9	3508.2
160°	3556.7	3540.4	3556.7	3572.6	3553.8
162.5°	3599.4	3583.5	3596.9	3615.7	3591.5
165°	3637.1	3621.1	3629.1	3647.9	3629.1
167.5°	3666.7	3650.5	3658.8	3677.6	3653.4
170°	3691.0	3674.7	3680.1	3699.0	3674.7
172.5°	3706.9	3691.0	3696.4	3715.2	3691.0
175°	3720.3	3701.5	3706.9	3725.8	3699.0
177.5°	3725.8	3706.9	3709.8	3728.6	3704.4
180°	3712.4	3712.4	3712.4	3712.4	3712.4



TEST NUMBER: P906901  
 CATALOG NUMBER: DFN2DIP-SQ4F0-120D110US835-FLLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.61	12.49	12.55	13.45	14.69	11.16	12.05	12.10	13.00	14.24
	3H	13.28	14.07	14.22	15.03	16.29	12.79	13.58	13.73	14.54	15.80
	4H	13.87	14.62	14.83	15.58	16.85	13.37	14.12	14.34	15.09	16.36
	6H	14.27	14.96	15.25	15.93	17.22	13.77	14.46	14.75	15.43	16.72
	8H	14.38	15.04	15.36	16.03	17.31	13.88	14.53	14.86	15.52	16.81
	12H	14.43	15.05	15.42	16.04	17.35	13.92	14.54	14.91	15.53	16.84
4H	2H	12.07	12.82	13.04	13.79	15.06	11.72	12.47	12.69	13.44	14.71
	3H	13.95	14.57	14.92	15.57	16.85	13.54	14.16	14.52	15.16	16.45
	4H	14.66	15.24	15.65	16.23	17.54	14.24	14.81	15.23	15.80	17.11
	6H	15.18	15.68	16.18	16.69	18.00	14.75	15.24	15.75	16.26	17.57
	8H	15.34	15.80	16.34	16.80	18.13	14.90	15.36	15.90	16.37	17.69
	12H	15.41	15.83	16.43	16.85	18.18	14.96	15.38	15.98	16.40	17.73
8H	4H	14.86	15.32	15.86	16.33	17.65	14.49	14.95	15.49	15.95	17.28
	6H	15.50	15.88	16.53	16.93	18.25	15.12	15.50	16.14	16.55	17.87
	8H	15.72	16.06	16.76	17.09	18.43	15.33	15.67	16.37	16.70	18.04
	12H	15.86	16.15	16.90	17.18	18.57	15.45	15.74	16.49	16.77	18.16
12H	4H	14.85	15.26	15.87	16.29	17.62	14.48	14.90	15.50	15.92	17.25
	6H	15.53	15.87	16.56	16.90	18.24	15.16	15.49	16.19	16.53	17.87
	8H	15.78	16.07	16.81	17.10	18.48	15.40	15.69	16.43	16.72	18.10