

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P909403

Luminaire Tested: DFN2DIP-SQ4F0-060D080US840-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P909403
REPORT IS A COMBINATION OF REPORTS P901616 AND P898471
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-060D080US840-RLLONL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13148.5 lumens
Efficiency: N/A
Efficacy: 120.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 109.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.946
Total Harmonic Distortion (THDi): 0.132
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P909403

CATALOG NUMBER: DFN2DIP-SQ4F0-060D080US840-RLLONL

Luminous Intensity Polar Plot

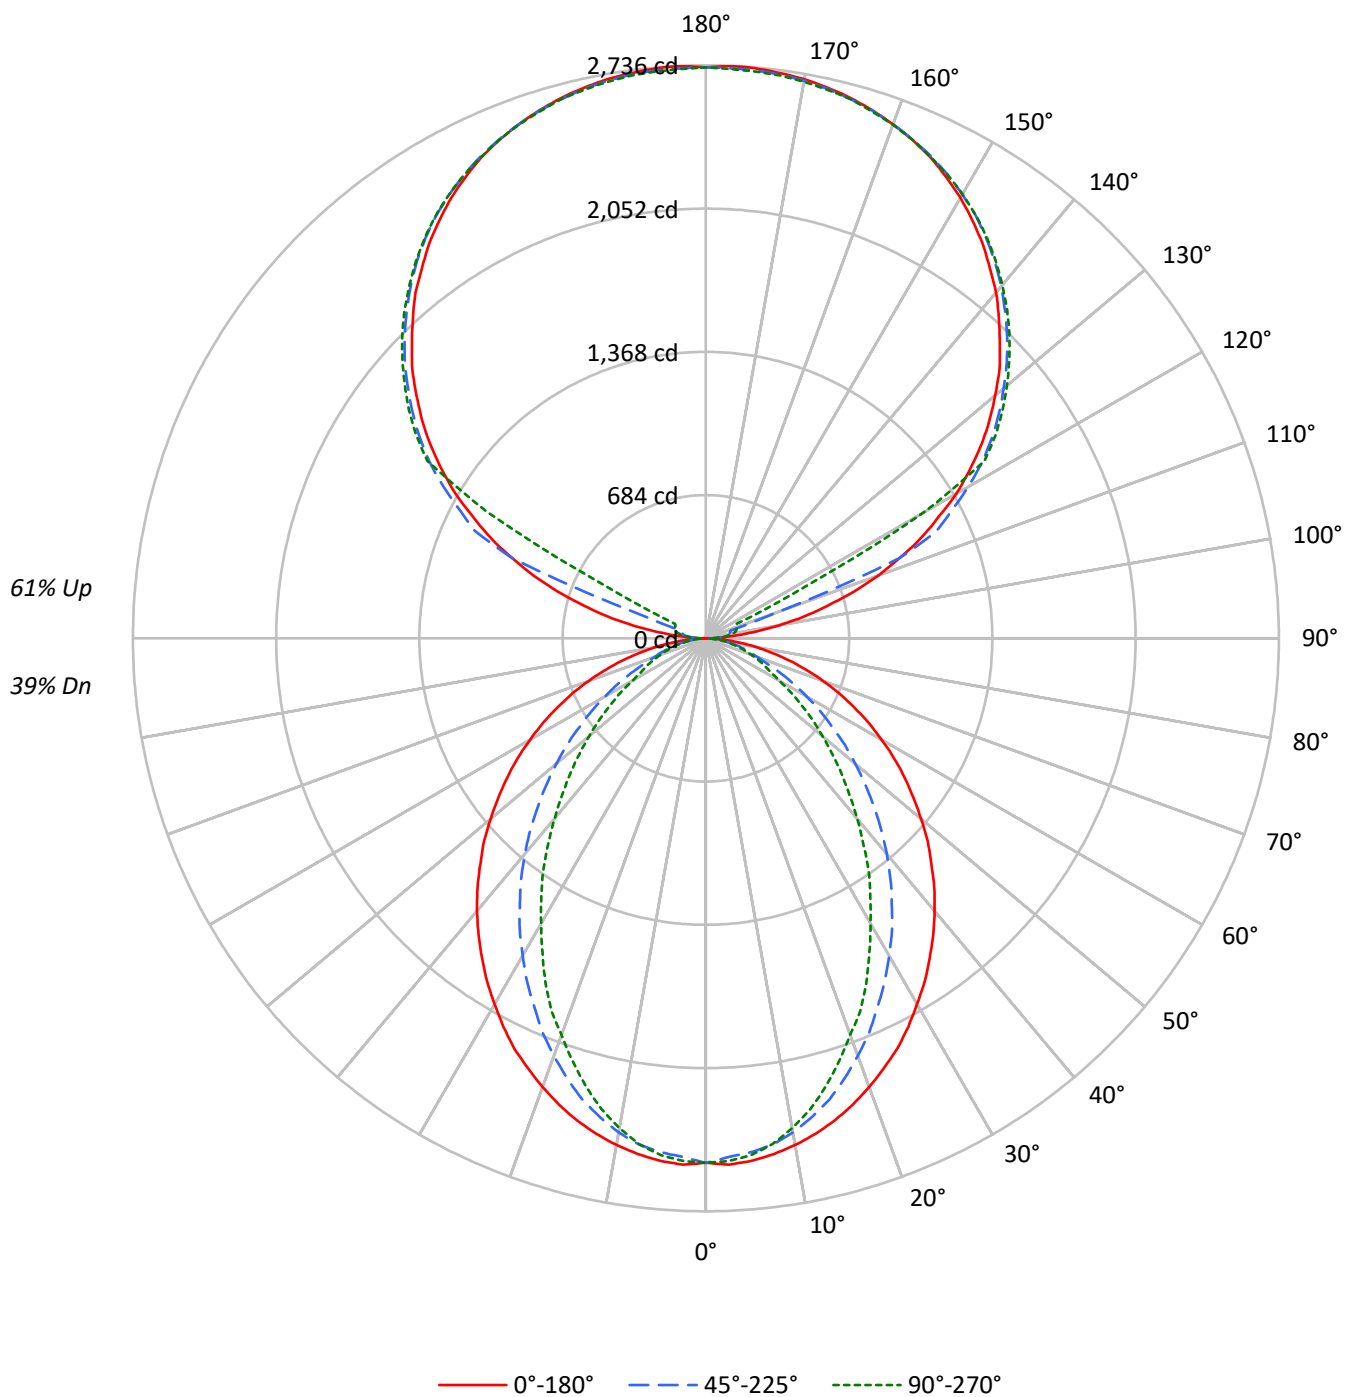

TEST NUMBER: P909403

CATALOG NUMBER: DFN2DIP-SQ4F0-060D080US840-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46
1	96	92	88	85	87	83	80	78	68	66	64	54	53	52	41	41	40
2	87	80	75	70	79	73	68	64	60	57	54	48	46	44	37	35	34
3	80	71	64	58	73	65	59	54	53	49	46	43	40	37	33	31	29
4	73	63	55	50	67	58	51	46	48	43	39	38	35	32	30	27	26
5	67	56	48	43	61	52	45	40	43	38	34	35	31	28	27	25	23
6	62	51	43	37	56	46	40	35	39	34	30	31	28	25	25	22	20
7	57	46	38	33	52	42	35	31	35	30	26	29	25	22	23	20	18
8	53	42	34	29	49	38	32	27	32	27	23	26	22	20	21	18	16
9	50	38	31	26	45	35	29	24	29	24	21	24	20	18	19	17	15
10	46	35	28	23	42	32	26	22	27	22	19	22	19	16	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1757	1757	1757
5°	1760	1730	1741
10°	1742	1696	1685
15°	1719	1640	1598
20°	1687	1563	1491
25°	1654	1477	1387
30°	1611	1389	1256
35°	1568	1293	1140
40°	1524	1195	1008
45°	1474	1085	888
50°	1421	975	771
55°	1367	857	658
60°	1304	733	542
65°	1231	608	489
70°	1143	490	443
75°	1032	433	404
80°	871	365	352
85°	607	245	268

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1474 cd/sqm

TEST NUMBER: P909403

CATALOG NUMBER: DFN2DIP-SQ4F0-060D080US840-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	234.7	1.8
10°-20°	644.3	4.9
20°-30°	904.6	6.9
30°-40°	986.1	7.5
40°-50°	906.3	6.9
50°-60°	711.7	5.4
60°-70°	463.3	3.5
70°-80°	238.5	1.8
80°-90°	65.7	0.5
90°-100°	89.9	0.7
100°-110°	335.1	2.5
110°-120°	888.9	6.8
120°-130°	1474.3	11.2
130°-140°	1566.0	11.9
140°-150°	1455.4	11.1
150°-160°	1170.1	8.9
160°-170°	754.0	5.7
170°-180°	259.5	2.0
0°-30°	1783.6	13.6
0°-40°	2769.6	21.1
0°-60°	4387.7	33.4
0°-90°	5155.1	39.2
90°-120°	1314.0	10.0
90°-150°	5809.7	44.2
90°-180°	7993.0	60.8
0°-180°	13148.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2504	2504	2504	2504	2504	
5°	2504	2493	2463	2484	2477	237
15°	2382	2357	2280	2237	2214	671
25°	2162	2090	1940	1847	1813	994
35°	1863	1747	1548	1405	1355	1166
45°	1523	1371	1133	972	918	1176
55°	1158	981	736	601	558	1035
65°	782	598	394	317	310	775
75°	417	258	181	165	163	441
85°	97	50	43	43	43	112
90°	2	24	39	49	53	12
95°	128	63	77	87	85	152
105°	600	659	120	142	150	641
115°	1134	1168	1217	304	162	1117
125°	1604	1630	1667	1681	1687	1430
135°	1985	2016	2034	2054	2050	1533
145°	2302	2300	2334	2348	2338	1440
155°	2535	2518	2541	2553	2537	1168
165°	2671	2660	2665	2679	2665	755
175°	2732	2719	2723	2736	2717	260
180°	2726	2726	2726	2726	2726	

TEST NUMBER: P909403

CATALOG NUMBER: DFN2DIP-SQ4F0-060D080US840-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2504.3	2504.3	2504.3	2504.3	2504.3
2.5°	2515.6	2504.3	2479.2	2502.0	2497.5
5°	2504.3	2493.0	2463.4	2483.9	2477.1
7.5°	2483.9	2470.3	2438.6	2447.5	2436.2
10°	2456.6	2440.7	2395.6	2388.6	2375.1
12.5°	2422.8	2402.3	2341.0	2327.5	2302.5
15°	2381.9	2356.8	2279.9	2236.9	2214.2
17.5°	2334.3	2297.9	2202.7	2152.9	2116.7
20°	2279.9	2234.4	2121.2	2064.7	2014.7
22.5°	2221.0	2168.8	2037.3	1960.4	1926.4
25°	2162.1	2089.5	1940.0	1847.1	1813.0
27.5°	2091.9	2014.7	1849.3	1742.7	1690.6
30°	2017.1	1930.8	1749.5	1634.1	1572.8
32.5°	1944.5	1840.2	1654.6	1518.4	1461.7
35°	1863.0	1747.4	1548.0	1405.1	1355.1
37.5°	1783.6	1658.8	1448.2	1291.7	1235.2
40°	1699.7	1563.9	1343.8	1183.0	1124.1
42.5°	1613.7	1468.6	1239.7	1071.9	1015.4
45°	1523.0	1371.0	1133.3	972.1	917.8
47.5°	1436.9	1276.1	1031.3	870.2	820.4
50°	1341.7	1180.8	931.5	775.0	727.6
52.5°	1248.6	1078.6	836.3	686.7	643.7
55°	1158.0	981.3	736.5	600.7	557.5
57.5°	1065.2	883.8	648.2	521.3	484.9
60°	970.0	788.7	555.2	439.8	403.4
62.5°	877.2	695.9	475.8	367.2	349.1
65°	781.9	598.2	394.4	317.4	310.4
67.5°	691.3	507.6	317.4	278.7	272.0
70°	596.0	419.3	262.8	240.2	231.1
72.5°	505.4	337.6	219.7	201.8	197.1
75°	417.0	258.2	181.3	165.4	163.3
77.5°	328.7	183.5	142.8	133.7	129.2
80°	246.9	131.5	108.7	99.8	99.8
82.5°	172.2	88.5	74.7	70.2	70.2
85°	97.4	49.8	43.0	43.0	43.0
87.5°	36.4	18.1	18.1	15.9	15.9
90°	1.9	23.6	39.4	49.4	53.2
92.5°	49.4	41.5	47.4	51.3	53.2
95°	128.2	63.0	76.9	86.9	84.8
97.5°	230.8	69.1	100.5	106.6	108.5
100°	349.3	79.0	112.5	128.2	132.1
102.5°	479.4	475.5	116.4	137.9	144.1
105°	599.8	659.0	120.4	142.0	150.0
107.5°	739.8	789.0	124.4	145.9	153.9
110°	874.1	915.3	345.4	148.0	155.8

TEST NUMBER: P909403

CATALOG NUMBER: DFN2DIP-SQ4F0-060D080US840-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1000.4	1035.7	1002.3	151.8	157.9
115°	1134.4	1167.9	1217.3	303.9	161.9
117.5°	1250.8	1290.2	1323.9	1041.6	524.8
120°	1381.1	1410.6	1446.2	1469.9	1203.5
122.5°	1491.4	1523.1	1562.7	1574.4	1576.5
125°	1603.9	1629.6	1667.1	1680.9	1686.8
127.5°	1706.5	1734.1	1763.9	1783.5	1785.4
130°	1803.2	1834.8	1856.4	1878.2	1876.3
132.5°	1901.9	1927.6	1949.2	1967.0	1965.1
135°	1984.8	2016.4	2034.0	2054.0	2049.9
137.5°	2071.5	2095.2	2115.1	2134.8	2128.9
140°	2156.3	2172.2	2193.8	2211.6	2201.7
142.5°	2227.6	2241.3	2266.8	2282.6	2272.7
145°	2302.5	2300.4	2333.9	2347.7	2337.8
147.5°	2367.4	2361.6	2395.0	2404.9	2397.1
150°	2430.6	2416.8	2448.4	2460.1	2450.3
152.5°	2483.9	2468.1	2497.6	2509.6	2495.8
155°	2535.2	2517.6	2541.2	2552.9	2537.3
157.5°	2576.6	2560.9	2578.7	2592.5	2576.6
160°	2612.2	2600.3	2612.2	2623.9	2610.1
162.5°	2643.6	2631.9	2641.7	2655.5	2637.8
165°	2671.3	2659.6	2665.4	2679.2	2665.4
167.5°	2693.0	2681.1	2687.2	2701.0	2683.2
170°	2710.9	2698.9	2702.9	2716.7	2698.9
172.5°	2722.6	2710.9	2714.8	2728.7	2710.9
175°	2732.4	2718.6	2722.6	2736.3	2716.7
177.5°	2736.3	2722.6	2724.6	2738.5	2720.7
180°	2726.5	2726.5	2726.5	2726.5	2726.5

TEST NUMBER: P909403

CATALOG NUMBER: DFN2DIP-SQ4F0-060D080US840-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.02	8.77	9.07	9.82	11.24	3.98	4.73	5.03	5.78	7.20
	3H	9.70	10.36	10.76	11.42	12.86	5.16	5.83	6.22	6.89	8.33
	4H	10.30	10.94	11.37	12.00	13.44	5.61	6.25	6.68	7.31	8.75
	6H	10.72	11.31	11.81	12.37	13.83	5.93	6.51	7.01	7.58	9.03
	8H	10.85	11.41	11.94	12.49	13.94	6.02	6.57	7.10	7.65	9.10
	12H	10.91	11.44	12.00	12.51	13.99	6.06	6.59	7.15	7.66	9.13
4H	2H	8.03	8.66	9.11	9.72	11.17	4.57	5.20	5.65	6.26	7.71
	3H	9.85	10.38	10.94	11.47	12.93	5.91	6.44	7.00	7.53	8.99
	4H	10.55	11.03	11.64	12.11	13.59	6.46	6.94	7.55	8.02	9.50
	6H	11.06	11.48	12.16	12.58	14.05	6.87	7.29	7.97	8.39	9.86
	8H	11.24	11.62	12.34	12.72	14.21	7.00	7.39	8.10	8.48	9.97
	12H	11.33	11.68	12.45	12.79	14.28	7.06	7.41	8.18	8.52	10.01
8H	4H	10.51	10.90	11.61	11.99	13.48	6.73	7.12	7.83	8.22	9.70
	6H	11.08	11.40	12.20	12.53	14.02	7.25	7.57	8.37	8.71	10.19
	8H	11.30	11.58	12.42	12.69	14.20	7.44	7.72	8.57	8.84	10.35
	12H	11.43	11.68	12.56	12.79	14.34	7.56	7.80	8.69	8.92	10.46
12H	4H	10.46	10.81	11.57	11.91	13.41	6.74	7.09	7.85	8.19	9.69
	6H	11.05	11.33	12.18	12.45	13.96	7.30	7.58	8.43	8.70	10.20
	8H	11.27	11.52	12.40	12.63	14.18	7.51	7.76	8.64	8.87	10.41