

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P909569

Luminaire Tested: DFN2DIP-SQ4F0-100D160US840-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P909569
REPORT IS A COMBINATION OF REPORTS P901731 AND P898471
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-100D160US840-FLLONL
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 25994.0 lumens
Efficiency: N/A
Efficacy: 121.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 214.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P909569

CATALOG NUMBER: DFN2DIP-SQ4F0-100D160US840-FLLONL

Luminous Intensity Polar Plot

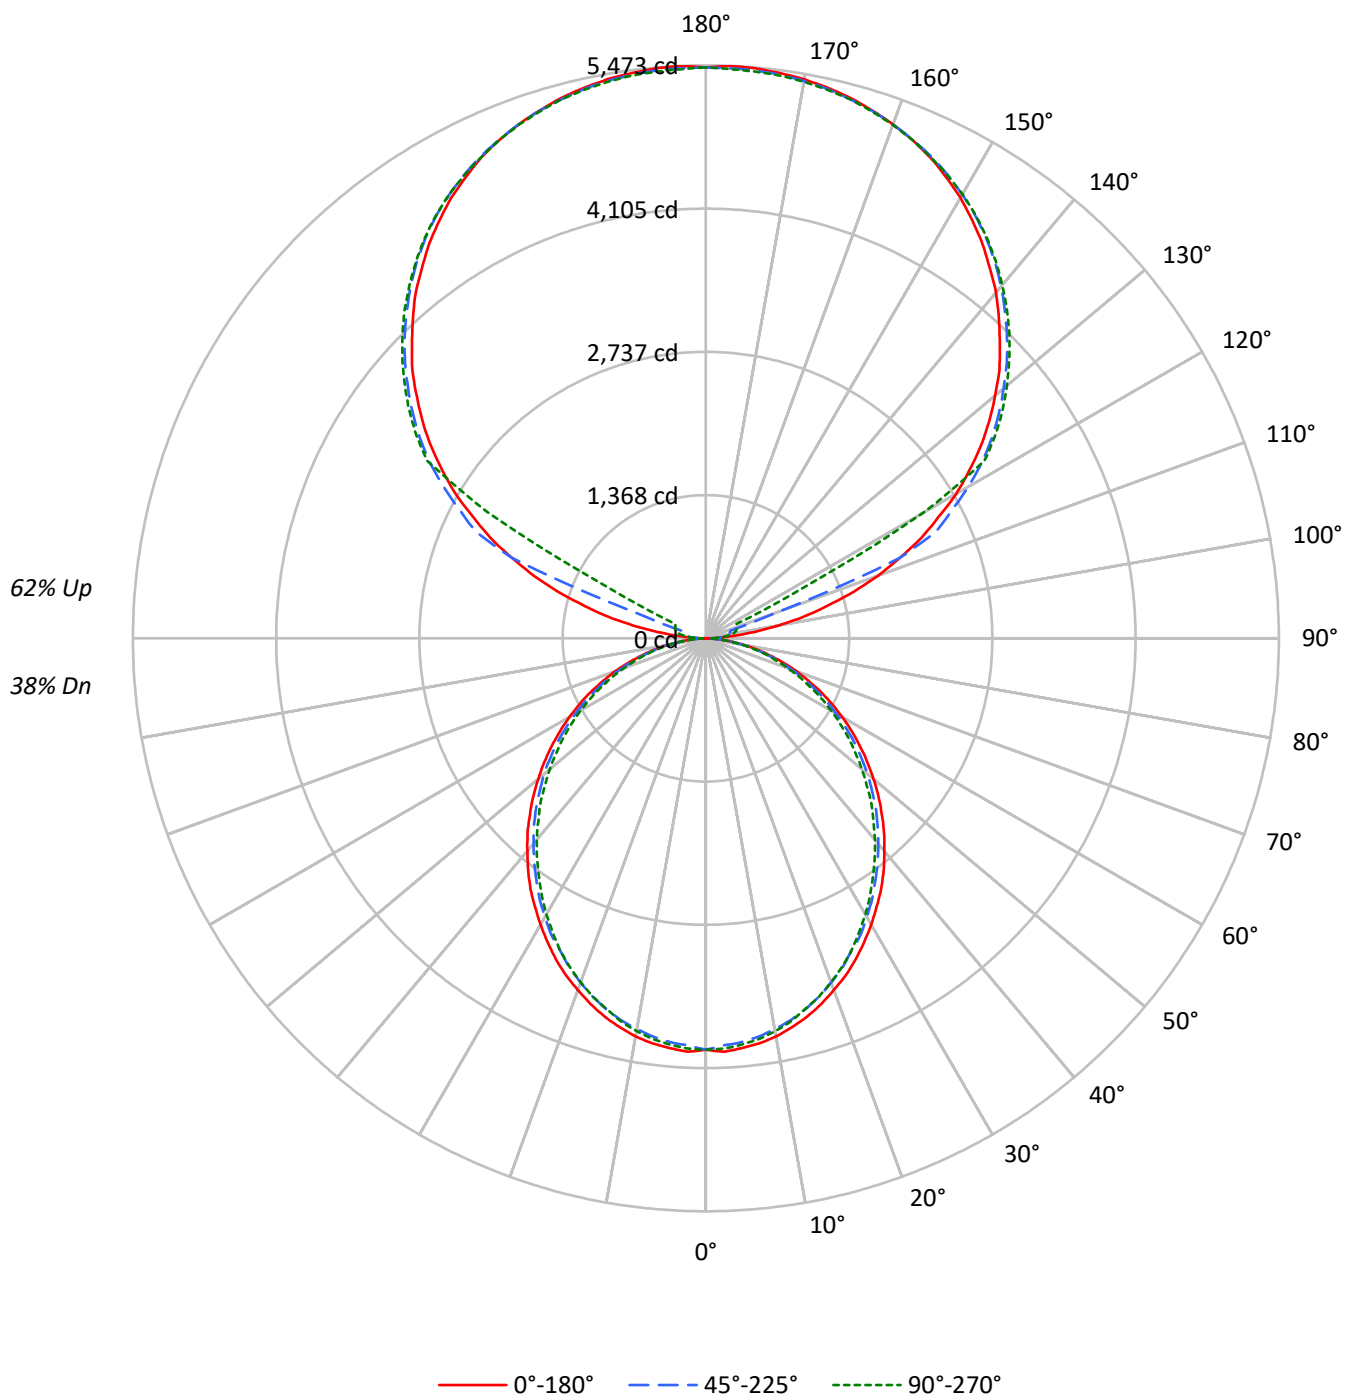

TEST NUMBER: P909569

CATALOG NUMBER: DFN2DIP-SQ4F0-100D160US840-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46
1	95	91	87	84	86	83	80	77	67	65	63	53	52	50	40	39	38
2	87	79	73	68	78	72	67	63	59	55	52	47	44	42	35	34	32
3	79	70	63	57	71	64	57	52	52	48	44	41	38	36	31	29	28
4	72	62	54	48	65	56	50	44	46	41	37	37	33	30	28	26	24
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	21
6	61	49	41	36	55	45	38	33	37	32	28	30	26	23	23	20	18
7	56	44	36	31	51	41	34	29	34	28	25	27	23	20	21	18	16
8	52	40	33	27	47	37	30	25	31	25	22	25	21	18	19	16	14
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13
10	45	33	26	22	41	31	25	20	26	21	17	21	17	15	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2757	2757	2757
5°	2762	2719	2738
10°	2739	2683	2702
15°	2699	2640	2644
20°	2644	2579	2586
25°	2590	2506	2518
30°	2522	2438	2432
35°	2458	2358	2340
40°	2379	2277	2253
45°	2300	2196	2165
50°	2213	2112	2061
55°	2123	2013	1967
60°	2021	1896	1859
65°	1910	1776	1731
70°	1768	1629	1594
75°	1571	1453	1469
80°	1334	1229	1227
85°	964	841	825

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2921 cd/sqm

TEST NUMBER: P909569

CATALOG NUMBER: DFN2DIP-SQ4F0-100D160US840-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	369.8	1.4
10°-20°	1040.6	4.0
20°-30°	1529.3	5.9
30°-40°	1776.1	6.8
40°-50°	1773.9	6.8
50°-60°	1546.8	6.0
60°-70°	1143.4	4.4
70°-80°	646.9	2.5
80°-90°	180.4	0.7
90°-100°	179.8	0.7
100°-110°	670.3	2.6
110°-120°	1777.8	6.8
120°-130°	2948.5	11.3
130°-140°	3132.1	12.0
140°-150°	2910.9	11.2
150°-160°	2340.3	9.0
160°-170°	1508.0	5.8
170°-180°	519.0	2.0
0°-30°	2939.7	11.3
0°-40°	4715.8	18.1
0°-60°	8036.5	30.9
0°-90°	10007.3	38.5
90°-120°	2627.9	10.1
90°-150°	11619.4	44.7
90°-180°	15987.0	61.5
0°-180°	25994.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3930	3930	3930	3930	3930	
5°	3930	3915	3873	3903	3896	373
15°	3741	3718	3669	3684	3665	1054
25°	3386	3355	3291	3298	3291	1558
35°	2921	2883	2823	2800	2781	1824
45°	2377	2350	2293	2252	2237	1834
55°	1799	1776	1731	1685	1666	1608
65°	1213	1190	1153	1118	1100	1199
75°	635	627	608	586	593	677
85°	155	151	148	136	132	173
90°	4	47	79	99	106	24
95°	256	126	154	174	170	304
105°	1200	1318	241	284	300	1282
115°	2269	2336	2435	608	324	2234
125°	3208	3259	3334	3362	3374	2861
135°	3970	4033	4068	4108	4100	3066
145°	4605	4601	4668	4695	4676	2880
155°	5070	5035	5082	5106	5074	2336
165°	5342	5319	5331	5358	5331	1509
175°	5465	5437	5445	5473	5433	520
180°	5453	5453	5453	5453	5453	

TEST NUMBER: P909569

CATALOG NUMBER: DFN2DIP-SQ4F0-100D160US840-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3929.5	3929.5	3929.5	3929.5	3929.5
2.5°	3952.3	3933.4	3891.7	3929.5	3922.2
5°	3929.5	3914.6	3872.9	3903.0	3895.8
7.5°	3903.0	3880.5	3838.8	3869.3	3861.7
10°	3861.7	3835.3	3789.9	3820.0	3808.8
12.5°	3804.8	3782.4	3737.0	3755.9	3748.2
15°	3740.6	3718.2	3668.8	3684.1	3665.3
17.5°	3661.3	3638.8	3589.5	3608.4	3589.5
20°	3574.2	3551.8	3498.9	3510.1	3495.2
22.5°	3487.7	3453.6	3404.3	3404.3	3396.7
25°	3385.5	3355.4	3291.3	3298.4	3291.3
27.5°	3272.0	3245.5	3196.6	3185.4	3166.5
30°	3159.0	3128.5	3071.9	3060.7	3045.5
32.5°	3037.9	3015.5	2954.9	2932.0	2916.8
35°	2920.8	2883.2	2822.6	2799.8	2780.9
37.5°	2788.5	2754.4	2693.9	2667.5	2648.6
40°	2652.6	2622.1	2561.6	2528.0	2512.7
42.5°	2520.3	2489.8	2429.7	2391.7	2369.2
45°	2376.8	2350.4	2293.4	2252.1	2237.0
47.5°	2237.0	2210.5	2149.9	2108.2	2085.8
50°	2089.4	2070.5	2017.6	1964.7	1945.9
52.5°	1945.9	1919.5	1870.5	1828.9	1802.4
55°	1798.8	1775.9	1730.6	1685.3	1666.5
57.5°	1651.2	1632.3	1583.1	1537.8	1522.6
60°	1503.7	1488.8	1435.9	1394.2	1383.0
62.5°	1360.2	1333.7	1296.1	1258.4	1243.1
65°	1213.1	1190.2	1152.6	1118.4	1099.6
67.5°	1062.0	1042.7	1009.1	982.6	967.4
70°	922.0	906.8	872.7	846.3	831.4
72.5°	778.5	763.3	744.5	718.0	706.7
75°	634.6	627.4	608.1	585.7	593.3
77.5°	506.3	491.1	483.4	472.2	461.0
80°	378.0	374.1	366.4	355.2	347.6
82.5°	257.0	257.0	253.4	238.1	238.1
85°	154.7	151.2	147.5	135.9	132.3
87.5°	68.2	60.5	52.9	41.7	37.7
90°	3.7	47.4	78.7	98.9	106.3
92.5°	98.9	82.9	94.6	102.6	106.3
95°	256.3	126.0	153.7	173.8	169.7
97.5°	461.5	138.3	201.0	213.2	216.9
100°	698.6	157.9	224.9	256.3	264.3
102.5°	958.7	951.2	232.9	276.0	288.1
105°	1199.5	1318.1	240.9	284.0	299.8
107.5°	1479.7	1578.1	248.8	292.0	307.8
110°	1748.2	1830.7	690.6	296.1	311.5

TEST NUMBER: P909569

CATALOG NUMBER: DFN2DIP-SQ4F0-100D160US840-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	2000.7	2071.5	2004.5	303.7	315.8
115°	2268.8	2335.7	2434.6	607.7	323.8
117.5°	2501.6	2580.3	2647.9	2083.3	1049.6
120°	2762.2	2821.2	2892.4	2939.7	2407.0
122.5°	2982.8	3046.1	3125.2	3148.7	3152.9
125°	3207.7	3259.2	3334.3	3361.9	3373.7
127.5°	3412.9	3468.3	3527.8	3567.1	3570.9
130°	3606.5	3669.8	3712.9	3756.4	3752.7
132.5°	3803.8	3855.3	3898.4	3934.0	3930.3
135°	3969.6	4032.9	4068.0	4107.8	4099.9
137.5°	4143.0	4190.3	4230.1	4269.5	4257.8
140°	4312.6	4344.4	4387.6	4423.2	4403.5
142.5°	4455.0	4482.7	4533.8	4565.2	4545.5
145°	4605.0	4600.7	4667.8	4695.4	4675.8
147.5°	4734.8	4723.0	4790.1	4809.8	4794.2
150°	4861.3	4833.6	4896.9	4920.4	4900.7
152.5°	4967.6	4936.2	4995.3	5019.2	4991.6
155°	5070.2	5035.1	5082.5	5105.9	5074.5
157.5°	5153.2	5121.8	5157.4	5185.1	5153.2
160°	5224.4	5200.5	5224.4	5247.9	5220.2
162.5°	5287.3	5263.8	5283.4	5311.1	5275.5
165°	5342.5	5319.1	5330.8	5358.4	5330.8
167.5°	5386.1	5362.2	5374.4	5402.0	5366.4
170°	5421.7	5397.8	5405.7	5433.4	5397.8
172.5°	5445.1	5421.7	5429.6	5457.3	5421.7
175°	5464.8	5437.1	5445.1	5472.8	5433.4
177.5°	5472.8	5445.1	5449.3	5477.0	5441.4
180°	5453.1	5453.1	5453.1	5453.1	5453.1

TEST NUMBER: P909569

CATALOG NUMBER: DFN2DIP-SQ4F0-100D160US840-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.64	10.41	10.69	11.46	12.89	9.20	9.96	10.25	11.02	12.44
	3H	11.30	11.99	12.36	13.05	14.49	10.81	11.50	11.87	12.56	14.00
	4H	11.88	12.54	12.96	13.60	15.05	11.39	12.04	12.46	13.11	14.56
	6H	12.28	12.88	13.36	13.95	15.42	11.78	12.38	12.86	13.45	14.92
	8H	12.39	12.96	13.47	14.04	15.50	11.89	12.46	12.97	13.54	15.00
	12H	12.43	12.98	13.52	14.06	15.54	11.92	12.47	13.01	13.55	15.03
4H	2H	10.09	10.74	11.17	11.81	13.26	9.74	10.39	10.81	11.45	12.91
	3H	11.95	12.50	13.04	13.59	15.05	11.55	12.09	12.63	13.18	14.65
	4H	12.67	13.17	13.76	14.25	15.73	12.24	12.74	13.33	13.82	15.31
	6H	13.18	13.61	14.28	14.72	16.19	12.75	13.18	13.85	14.28	15.76
	8H	13.33	13.73	14.43	14.83	16.32	12.89	13.29	13.99	14.39	15.89
	12H	13.40	13.76	14.52	14.87	16.38	12.95	13.31	14.07	14.43	15.93
8H	4H	12.86	13.26	13.96	14.35	15.85	12.48	12.88	13.58	13.98	15.47
	6H	13.49	13.82	14.61	14.96	16.45	13.11	13.44	14.23	14.58	16.07
	8H	13.71	14.00	14.84	15.12	16.63	13.32	13.61	14.45	14.73	16.24
	12H	13.84	14.10	14.97	15.21	16.76	13.43	13.68	14.56	14.80	16.35
12H	4H	12.84	13.20	13.95	14.31	15.81	12.47	12.83	13.59	13.94	15.44
	6H	13.52	13.81	14.65	14.93	16.44	13.15	13.44	14.27	14.56	16.07
	8H	13.76	14.01	14.89	15.13	16.68	13.38	13.63	14.51	14.75	16.30