

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P909610

Luminaire Tested: DFN2DIP-SQ4F0-120D060US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P909610
REPORT IS A COMBINATION OF REPORTS P900072 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-120D060US840-RLLFLL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15663.0 lumens
Efficiency: N/A
Efficacy: 96.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 162.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P909610

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US840-RLLFLL

Luminous Intensity Polar Plot

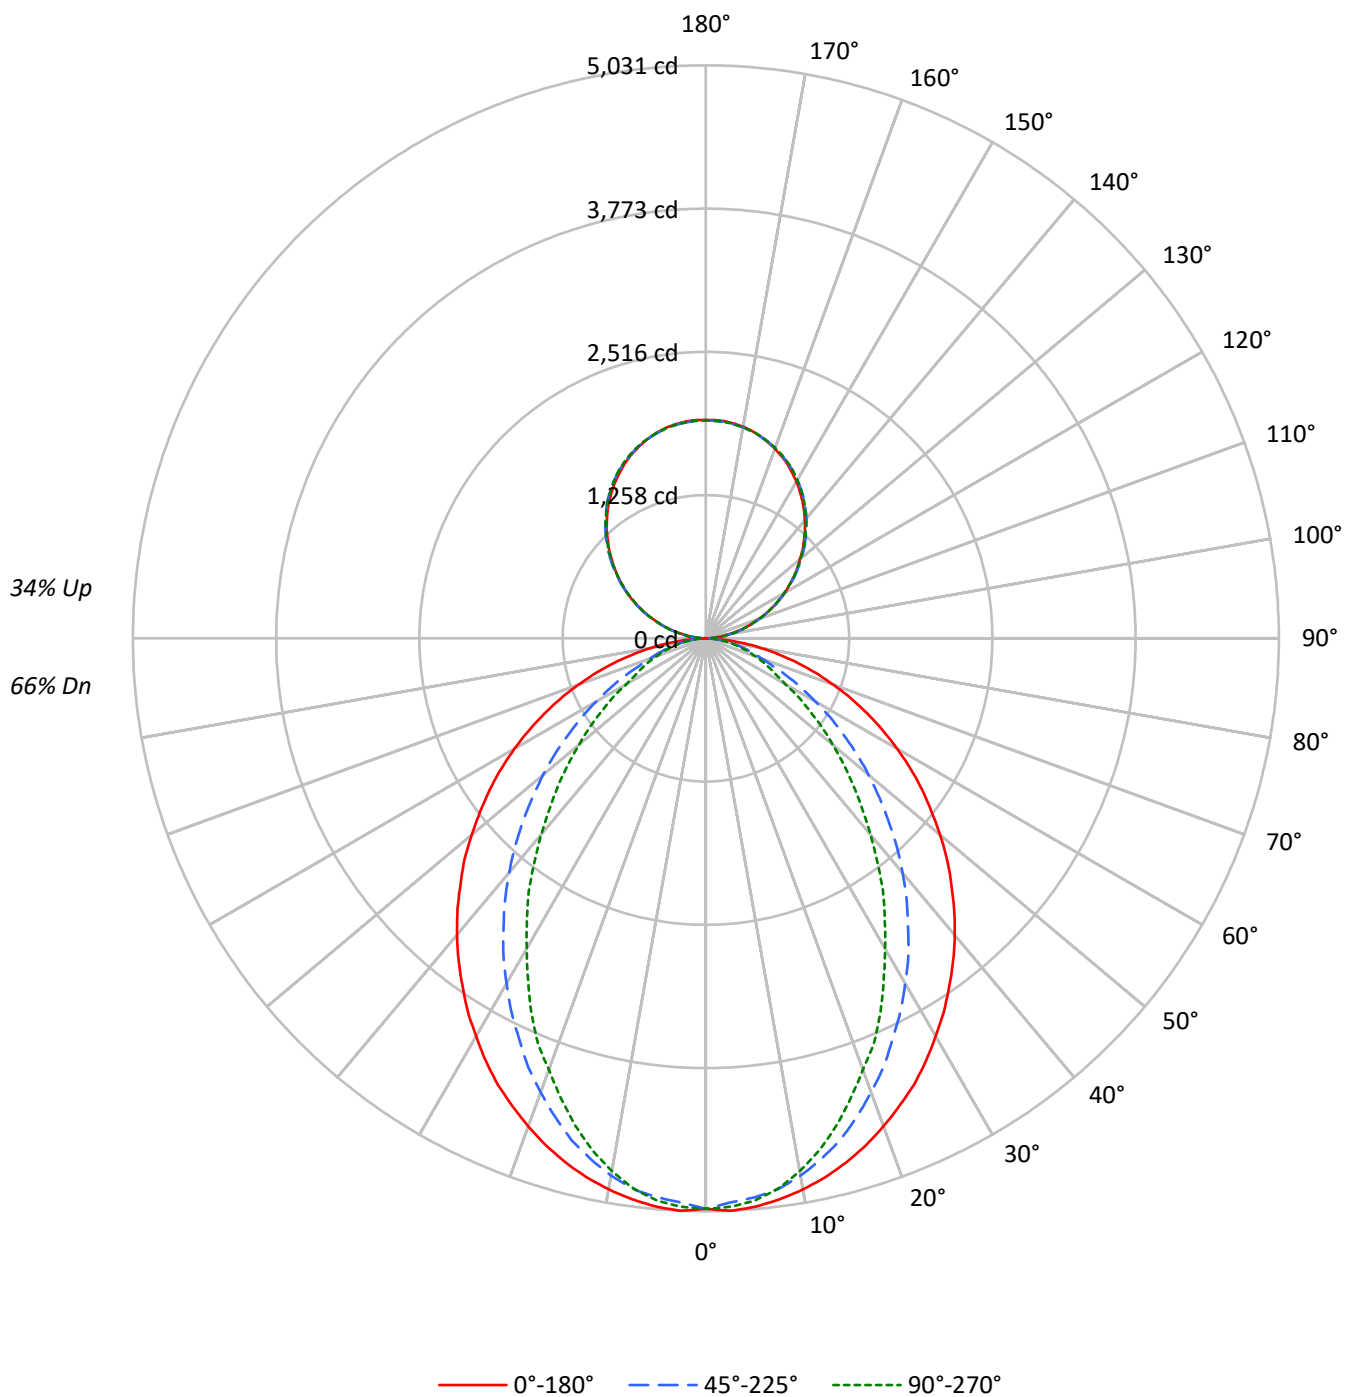

TEST NUMBER: P909610

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US840-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71
1	102	98	94	91	96	92	89	86	82	79	77	72	70	69	63	62	61
2	93	86	80	75	88	81	76	72	72	68	65	64	61	58	57	54	52
3	86	76	69	63	80	72	66	61	65	59	55	57	53	50	51	48	45
4	79	68	60	54	74	65	58	52	58	52	48	52	47	44	46	42	40
5	73	61	53	47	68	58	51	45	52	46	42	47	42	38	42	38	35
6	67	55	47	41	63	52	45	40	47	41	37	42	38	34	38	34	31
7	62	50	42	37	59	48	40	35	43	37	33	39	34	30	35	31	28
8	58	46	38	33	55	44	37	32	40	34	29	36	31	27	32	28	25
9	54	42	35	29	51	40	33	29	36	31	27	33	28	25	30	26	23
10	51	39	31	27	48	37	30	26	34	28	24	31	26	23	28	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3514	3514	3514
5°	3520	3459	3482
10°	3485	3392	3369
15°	3437	3281	3195
20°	3373	3127	2981
25°	3308	2954	2774
30°	3221	2777	2512
35°	3136	2587	2281
40°	3048	2390	2016
45°	2947	2171	1776
50°	2843	1950	1542
55°	2734	1714	1316
60°	2607	1466	1085
65°	2462	1215	977
70°	2285	981	886
75°	2064	866	808
80°	1743	729	704
85°	1214	490	536

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2947 cd/sqm

TEST NUMBER: P909610

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US840-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	469.4	3.0
10°-20°	1288.6	8.2
20°-30°	1809.2	11.6
30°-40°	1972.1	12.6
40°-50°	1812.6	11.6
50°-60°	1423.5	9.1
60°-70°	926.6	5.9
70°-80°	476.9	3.0
80°-90°	127.2	0.8
90°-100°	118.6	0.8
100°-110°	376.8	2.4
110°-120°	644.8	4.1
120°-130°	848.0	5.4
130°-140°	951.8	6.1
140°-150°	933.4	6.0
150°-160°	783.0	5.0
160°-170°	519.2	3.3
170°-180°	181.5	1.2
0°-30°	3567.2	22.8
0°-40°	5539.3	35.4
0°-60°	8775.3	56.0
0°-90°	10306.0	65.8
90°-120°	1140.1	7.3
90°-150°	3873.3	24.7
90°-180°	5357.0	34.2
0°-180°	15663.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5008	5008	5008	5008	5008	
5°	5008	4986	4927	4968	4954	475
15°	4764	4714	4560	4474	4429	1342
25°	4324	4179	3880	3694	3626	1989
35°	3726	3495	3096	2810	2710	2332
45°	3046	2742	2266	1944	1836	2352
55°	2316	1963	1473	1201	1115	2070
65°	1564	1196	789	635	621	1550
75°	834	516	363	331	326	882
85°	195	100	86	86	86	224
90°	2	21	57	53	55	15
95°	84	100	103	103	100	94
105°	348	352	356	359	359	367
115°	647	656	653	652	647	640
125°	941	956	951	946	944	841
135°	1217	1235	1239	1237	1232	941
145°	1478	1489	1499	1500	1494	923
155°	1690	1694	1700	1708	1702	778
165°	1838	1836	1836	1848	1840	519
175°	1913	1908	1905	1916	1906	182
180°	1916	1916	1916	1916	1916	

TEST NUMBER: P909610

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US840-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5008.5	5008.5	5008.5	5008.5	5008.5
2.5°	5031.2	5008.5	4958.5	5004.2	4995.0
5°	5008.5	4985.9	4926.7	4967.6	4954.2
7.5°	4967.6	4940.7	4877.2	4895.0	4872.4
10°	4913.3	4881.6	4791.1	4777.2	4750.3
12.5°	4845.4	4804.6	4681.9	4655.1	4605.1
15°	4763.7	4713.7	4559.8	4473.7	4428.6
17.5°	4668.5	4595.9	4405.4	4306.0	4233.4
20°	4559.8	4469.0	4242.4	4129.4	4029.4
22.5°	4442.0	4337.7	4074.6	3920.7	3852.9
25°	4324.2	4178.9	3879.8	3694.2	3625.9
27.5°	4183.8	4029.4	3698.5	3485.6	3381.1
30°	4034.2	3861.6	3499.0	3268.1	3145.5
32.5°	3889.0	3680.3	3309.0	3036.9	2923.4
35°	3726.0	3494.6	3095.9	2810.4	2710.3
37.5°	3567.2	3317.7	2896.4	2583.3	2470.3
40°	3399.4	3127.8	2687.8	2366.0	2248.2
42.5°	3227.2	2937.3	2479.5	2143.8	2030.8
45°	3046.0	2742.1	2266.4	1944.3	1835.5
47.5°	2873.8	2552.1	2062.5	1740.4	1640.8
50°	2683.4	2361.7	1863.0	1549.9	1455.2
52.5°	2497.3	2157.3	1672.5	1373.4	1287.4
55°	2316.0	1962.6	1473.0	1201.2	1115.2
57.5°	2130.3	1767.8	1296.5	1042.6	970.0
60°	1940.0	1577.3	1110.3	879.6	807.0
62.5°	1754.3	1391.7	951.7	734.4	698.2
65°	1563.9	1196.5	788.7	634.8	620.9
67.5°	1382.6	1015.1	634.8	557.3	543.9
70°	1192.1	838.7	525.6	480.4	462.1
72.5°	1010.9	675.2	439.5	403.4	394.4
75°	833.8	516.4	362.6	330.8	326.5
77.5°	657.4	366.9	285.7	267.4	258.2
80°	493.9	263.1	217.3	199.5	199.5
82.5°	344.4	176.9	149.6	140.4	140.4
85°	194.8	99.6	86.0	86.0	86.0
87.5°	72.6	36.1	36.1	31.7	31.7
90°	1.7	20.8	56.7	53.1	54.8
92.5°	35.9	48.6	50.3	52.0	52.0
95°	84.3	100.5	103.4	103.4	100.5
97.5°	140.4	155.4	161.8	161.8	161.8
100°	205.1	218.3	223.0	223.0	221.3
102.5°	273.3	283.1	289.4	291.1	289.4
105°	347.8	352.4	355.9	358.8	358.8
107.5°	421.7	428.7	428.7	429.8	421.7
110°	493.4	502.6	502.6	502.6	498.0

TEST NUMBER: P909610

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US840-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	570.8	580.6	578.9	574.2	570.8
115°	647.0	656.3	653.4	651.7	647.0
117.5°	722.8	735.5	727.3	722.8	718.1
120°	799.0	811.7	799.0	799.0	793.8
122.5°	868.3	884.4	876.4	871.8	868.3
125°	941.1	955.5	950.9	945.7	944.0
127.5°	1012.2	1030.1	1023.7	1016.8	1012.2
130°	1078.6	1099.4	1096.5	1093.1	1086.7
132.5°	1153.2	1169.3	1170.4	1162.4	1157.7
135°	1217.3	1235.2	1238.6	1236.9	1232.2
137.5°	1288.9	1303.3	1306.3	1305.0	1298.2
140°	1351.9	1366.3	1374.4	1374.4	1368.1
142.5°	1416.5	1431.0	1435.6	1437.3	1431.0
145°	1477.8	1489.3	1498.6	1500.4	1494.0
147.5°	1532.7	1547.1	1554.1	1556.9	1550.5
150°	1589.3	1599.1	1605.5	1610.6	1605.5
152.5°	1639.5	1649.4	1657.5	1663.9	1657.5
155°	1689.8	1694.5	1699.6	1707.8	1702.5
157.5°	1733.1	1736.7	1739.5	1751.1	1743.0
160°	1771.9	1775.3	1777.1	1786.9	1780.0
162.5°	1807.7	1807.7	1809.4	1820.4	1812.3
165°	1838.3	1836.5	1836.5	1848.2	1840.1
167.5°	1866.0	1860.9	1860.9	1872.4	1864.3
170°	1886.8	1882.2	1880.5	1892.0	1882.2
172.5°	1901.3	1896.6	1894.9	1906.4	1896.6
175°	1912.8	1908.2	1904.7	1916.3	1906.4
177.5°	1919.1	1914.6	1911.1	1920.9	1911.1
180°	1916.3	1916.3	1916.3	1916.3	1916.3

TEST NUMBER: P909610

CATALOG NUMBER: DFN2DIP-SQ4F0-120D060US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.89	13.87	13.70	14.70	15.73	8.85	9.83	9.66	10.66	11.69
	3H	14.58	15.45	15.41	16.30	17.36	10.05	10.92	10.88	11.77	12.82
	4H	15.20	16.02	16.04	16.87	17.94	10.51	11.33	11.35	12.18	13.25
	6H	15.63	16.39	16.49	17.25	18.33	10.83	11.59	11.69	12.45	13.53
	8H	15.76	16.49	16.63	17.36	18.44	10.93	11.65	11.80	12.53	13.61
	12H	15.83	16.52	16.70	17.39	18.50	10.98	11.67	11.85	12.54	13.64
4H	2H	12.92	13.75	13.77	14.60	15.67	9.46	10.29	10.31	11.14	12.21
	3H	14.77	15.46	15.63	16.34	17.42	10.83	11.51	11.69	12.40	13.48
	4H	15.47	16.09	16.35	16.97	18.09	11.38	12.00	12.26	12.89	14.00
	6H	16.00	16.54	16.89	17.44	18.55	11.81	12.35	12.70	13.25	14.37
	8H	16.18	16.68	17.07	17.58	18.71	11.94	12.44	12.83	13.34	14.47
	12H	16.28	16.73	17.19	17.65	18.78	12.01	12.47	12.93	13.38	14.52
8H	4H	15.45	15.95	16.34	16.85	17.98	11.68	12.18	12.57	13.08	14.20
	6H	16.03	16.44	16.95	17.38	18.51	12.20	12.61	13.12	13.56	14.68
	8H	16.25	16.61	17.18	17.55	18.69	12.39	12.76	13.32	13.69	14.84
	12H	16.39	16.72	17.33	17.64	18.84	12.52	12.84	13.45	13.77	14.96
12H	4H	15.41	15.86	16.32	16.78	17.91	11.69	12.14	12.60	13.06	14.19
	6H	16.00	16.37	16.93	17.30	18.45	12.25	12.62	13.18	13.55	14.70
	8H	16.23	16.56	17.16	17.48	18.68	12.47	12.79	13.40	13.72	14.91