

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P909639

Luminaire Tested: DFN2DIP-SQ4F0-120D140US840-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P909639
REPORT IS A COMBINATION OF REPORTS P901718 AND P898471
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-120D140US840-RLLONL
Description: 4 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 24297.3 lumens
Efficiency: N/A
Efficacy: 108.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 223.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P909639

CATALOG NUMBER: DFN2DIP-SQ4F0-120D140US840-RLLONL

Luminous Intensity Polar Plot

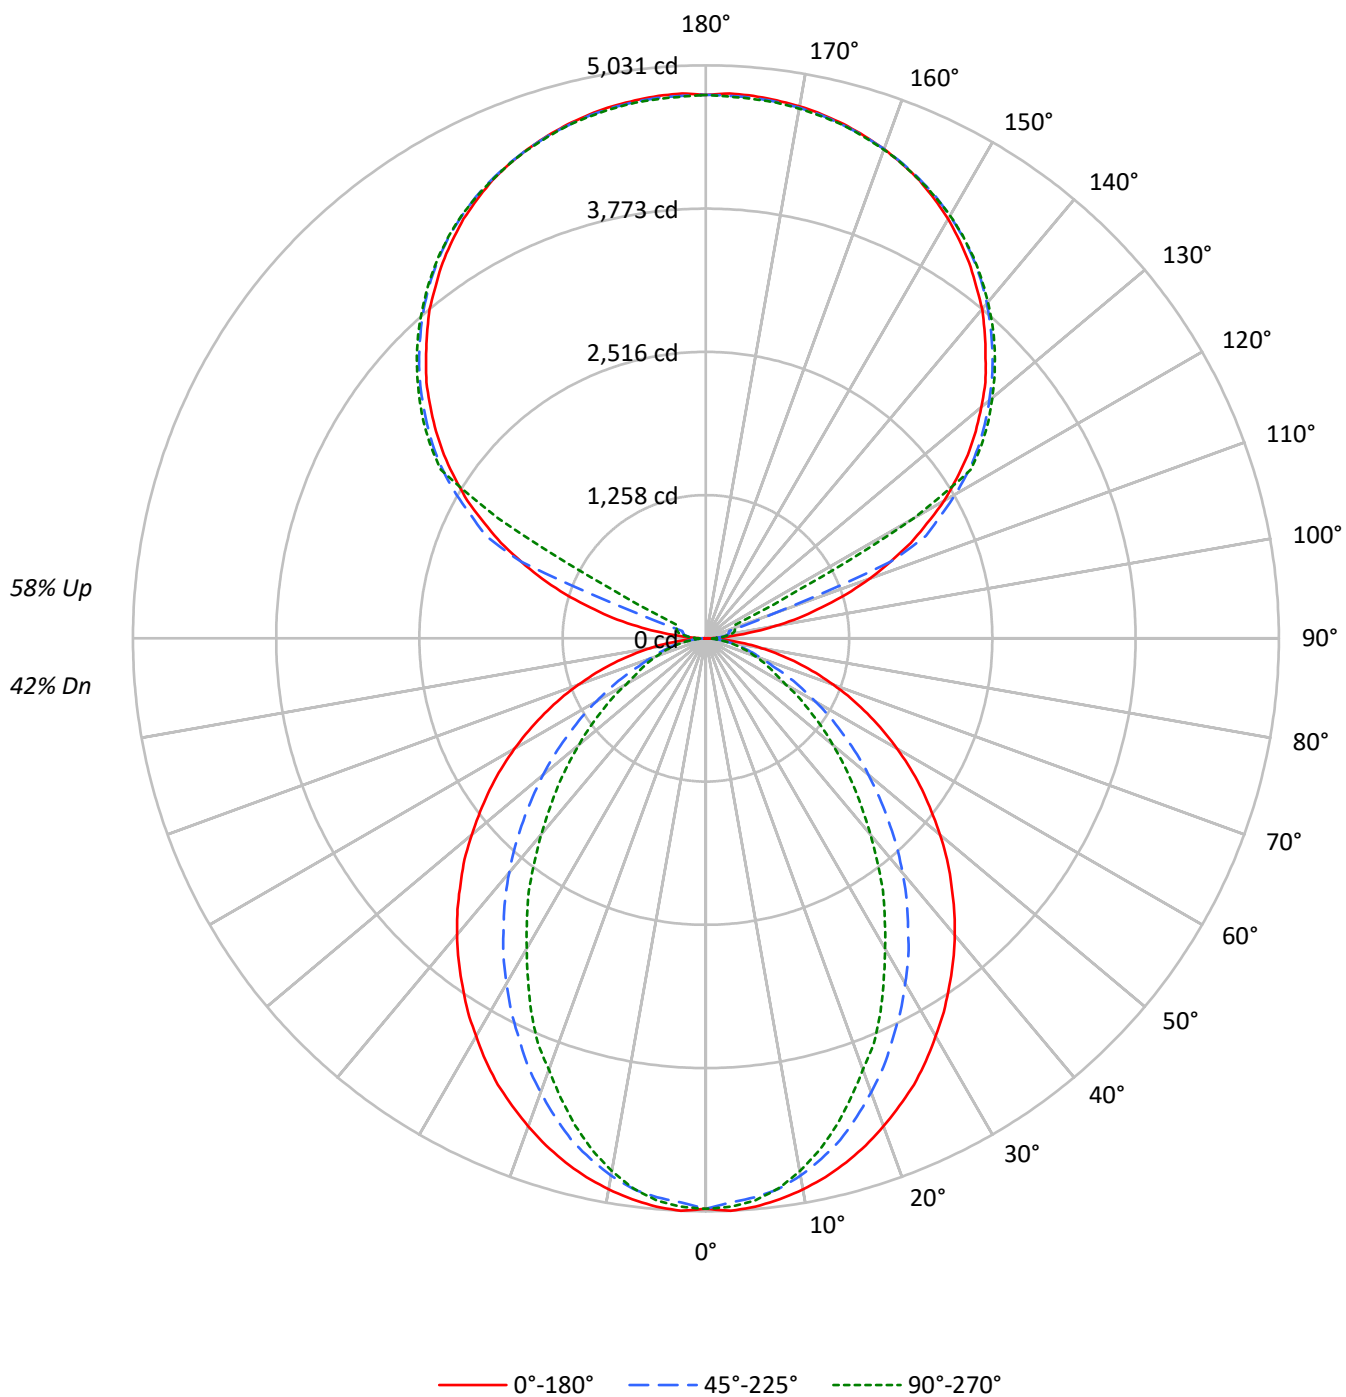

TEST NUMBER: P909639

CATALOG NUMBER: DFN2DIP-SQ4F0-120D140US840-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49
1	96	92	89	85	88	85	81	79	70	68	66	56	55	54	44	43	42
2	88	81	75	70	80	74	69	65	62	58	55	50	48	45	39	38	36
3	81	72	65	59	74	66	60	55	55	50	47	45	42	39	35	33	31
4	74	64	56	50	67	59	52	47	49	44	40	40	36	34	32	29	27
5	68	57	49	43	62	52	46	40	44	39	35	36	32	29	29	26	24
6	63	51	43	38	57	47	40	35	40	34	31	33	29	26	26	23	21
7	58	46	39	33	53	43	36	31	36	31	27	30	26	23	24	21	19
8	54	42	35	29	49	39	32	28	33	28	24	27	24	21	22	19	17
9	50	38	31	26	46	36	29	25	30	25	22	25	21	19	21	18	16
10	47	35	28	24	43	33	26	22	28	23	20	23	20	17	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3514	3514	3514
5°	3520	3459	3482
10°	3485	3392	3369
15°	3437	3281	3195
20°	3373	3127	2981
25°	3308	2954	2774
30°	3221	2777	2512
35°	3136	2587	2281
40°	3048	2390	2016
45°	2947	2171	1776
50°	2843	1950	1542
55°	2734	1714	1316
60°	2607	1466	1085
65°	2462	1215	977
70°	2285	981	886
75°	2064	866	808
80°	1743	729	704
85°	1214	490	536

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2947 cd/sqm

TEST NUMBER: P909639

CATALOG NUMBER: DFN2DIP-SQ4F0-120D140US840-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	469.4	1.9
10°-20°	1288.6	5.3
20°-30°	1809.2	7.4
30°-40°	1972.1	8.1
40°-50°	1812.6	7.5
50°-60°	1423.5	5.9
60°-70°	926.6	3.8
70°-80°	476.9	2.0
80°-90°	130.1	0.5
90°-100°	157.3	0.6
100°-110°	586.5	2.4
110°-120°	1555.5	6.4
120°-130°	2580.0	10.6
130°-140°	2740.5	11.3
140°-150°	2547.0	10.5
150°-160°	2047.7	8.4
160°-170°	1319.5	5.4
170°-180°	454.2	1.9
0°-30°	3567.2	14.7
0°-40°	5539.3	22.8
0°-60°	8775.3	36.1
0°-90°	10309.0	42.4
90°-120°	2299.4	9.5
90°-150°	10166.9	41.8
90°-180°	13988.0	57.6
0°-180°	24297.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5008	5008	5008	5008	5008	
5°	5008	4986	4927	4968	4954	475
15°	4764	4714	4560	4474	4429	1342
25°	4324	4179	3880	3694	3626	1989
35°	3726	3495	3096	2810	2710	2332
45°	3046	2742	2266	1944	1836	2352
55°	2316	1963	1473	1201	1115	2070
65°	1564	1196	789	635	621	1550
75°	834	516	363	331	326	882
85°	195	100	86	86	86	224
90°	3	41	69	86	93	23
95°	224	110	134	152	148	266
105°	1050	1153	211	248	262	1121
115°	1985	2044	2130	532	283	1954
125°	2807	2852	2918	2942	2952	2503
135°	3473	3529	3560	3594	3587	2683
145°	4029	4026	4084	4108	4091	2520
155°	4436	4406	4447	4468	4440	2044
165°	4675	4654	4664	4689	4664	1321
175°	4782	4758	4764	4789	4754	455
180°	4771	4771	4771	4771	4771	

TEST NUMBER: P909639

CATALOG NUMBER: DFN2DIP-SQ4F0-120D140US840-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5008.5	5008.5	5008.5	5008.5	5008.5
2.5°	5031.2	5008.5	4958.5	5004.2	4995.0
5°	5008.5	4985.9	4926.7	4967.6	4954.2
7.5°	4967.6	4940.7	4877.2	4895.0	4872.4
10°	4913.3	4881.6	4791.1	4777.2	4750.3
12.5°	4845.4	4804.6	4681.9	4655.1	4605.1
15°	4763.7	4713.7	4559.8	4473.7	4428.6
17.5°	4668.5	4595.9	4405.4	4306.0	4233.4
20°	4559.8	4469.0	4242.4	4129.4	4029.4
22.5°	4442.0	4337.7	4074.6	3920.7	3852.9
25°	4324.2	4178.9	3879.8	3694.2	3625.9
27.5°	4183.8	4029.4	3698.5	3485.6	3381.1
30°	4034.2	3861.6	3499.0	3268.1	3145.5
32.5°	3889.0	3680.3	3309.0	3036.9	2923.4
35°	3726.0	3494.6	3095.9	2810.4	2710.3
37.5°	3567.2	3317.7	2896.4	2583.3	2470.3
40°	3399.4	3127.8	2687.8	2366.0	2248.2
42.5°	3227.2	2937.3	2479.5	2143.8	2030.8
45°	3046.0	2742.1	2266.4	1944.3	1835.5
47.5°	2873.8	2552.1	2062.5	1740.4	1640.8
50°	2683.4	2361.7	1863.0	1549.9	1455.2
52.5°	2497.3	2157.3	1672.5	1373.4	1287.4
55°	2316.0	1962.6	1473.0	1201.2	1115.2
57.5°	2130.3	1767.8	1296.5	1042.6	970.0
60°	1940.0	1577.3	1110.3	879.6	807.0
62.5°	1754.3	1391.7	951.7	734.4	698.2
65°	1563.9	1196.5	788.7	634.8	620.9
67.5°	1382.6	1015.1	634.8	557.3	543.9
70°	1192.1	838.7	525.6	480.4	462.1
72.5°	1010.9	675.2	439.5	403.4	394.4
75°	833.8	516.4	362.6	330.8	326.5
77.5°	657.4	366.9	285.7	267.4	258.2
80°	493.9	263.1	217.3	199.5	199.5
82.5°	344.4	176.9	149.6	140.4	140.4
85°	194.8	99.6	86.0	86.0	86.0
87.5°	72.6	36.1	36.1	31.7	31.7
90°	3.2	41.4	68.9	86.5	93.1
92.5°	86.5	72.6	82.8	89.8	93.1
95°	224.3	110.3	134.5	152.1	148.5
97.5°	403.8	121.0	175.9	186.5	189.9
100°	611.3	138.1	196.8	224.3	231.3
102.5°	838.8	832.2	203.8	241.5	252.2
105°	1049.6	1153.3	210.8	248.4	262.4
107.5°	1294.7	1380.8	217.7	255.4	269.3
110°	1529.6	1601.8	604.3	259.1	272.7

TEST NUMBER: P909639

CATALOG NUMBER: DFN2DIP-SQ4F0-120D140US840-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1750.6	1812.5	1753.9	265.7	276.3
115°	1985.2	2043.8	2130.3	531.8	283.3
117.5°	2188.9	2257.8	2316.8	1822.8	918.4
120°	2416.9	2468.5	2530.8	2572.2	2106.1
122.5°	2610.0	2665.3	2734.6	2755.1	2758.9
125°	2806.8	2851.9	2917.5	2941.6	2951.9
127.5°	2986.4	3034.7	3086.8	3121.2	3124.5
130°	3155.6	3211.1	3248.7	3286.9	3283.6
132.5°	3328.3	3373.4	3411.1	3442.2	3439.0
135°	3473.4	3528.8	3559.5	3594.3	3587.3
137.5°	3625.1	3666.5	3701.4	3735.8	3725.6
140°	3773.6	3801.4	3839.1	3870.3	3853.0
142.5°	3898.2	3922.3	3967.1	3994.5	3977.3
145°	4029.4	4025.6	4084.3	4108.5	4091.3
147.5°	4143.0	4132.7	4191.3	4208.5	4195.0
150°	4253.7	4229.4	4284.8	4305.3	4288.1
152.5°	4346.7	4319.2	4370.9	4391.8	4367.6
155°	4436.4	4405.7	4447.1	4467.6	4440.2
157.5°	4509.0	4481.6	4512.8	4536.9	4509.0
160°	4571.4	4550.5	4571.4	4591.9	4567.7
162.5°	4626.3	4605.8	4623.1	4647.2	4616.1
165°	4674.7	4654.2	4664.5	4688.6	4664.5
167.5°	4712.8	4691.9	4702.5	4726.8	4695.6
170°	4743.9	4723.0	4730.0	4754.2	4723.0
172.5°	4764.4	4743.9	4750.9	4775.1	4743.9
175°	4781.7	4757.5	4764.4	4788.7	4754.2
177.5°	4788.7	4764.4	4768.2	4792.3	4761.2
180°	4771.4	4771.4	4771.4	4771.4	4771.4

TEST NUMBER: P909639

CATALOG NUMBER: DFN2DIP-SQ4F0-120D140US840-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.78	11.55	11.80	12.58	13.96	6.74	7.51	7.76	8.54	9.92
	3H	12.45	13.14	13.49	14.18	15.58	7.92	8.61	8.96	9.65	11.05
	4H	13.06	13.72	14.11	14.76	16.16	8.37	9.02	9.42	10.06	11.47
	6H	13.48	14.09	14.54	15.13	16.55	8.69	9.29	9.75	10.33	11.75
	8H	13.61	14.18	14.67	15.24	16.66	8.78	9.35	9.84	10.41	11.82
	12H	13.67	14.22	14.74	15.27	16.71	8.82	9.36	9.89	10.42	11.85
4H	2H	10.79	11.44	11.84	12.48	13.89	7.33	7.98	8.38	9.02	10.43
	3H	12.62	13.16	13.68	14.23	15.65	8.67	9.22	9.74	10.29	11.70
	4H	13.31	13.81	14.38	14.87	16.31	9.22	9.72	10.29	10.78	12.22
	6H	13.83	14.25	14.90	15.33	16.77	9.64	10.06	10.71	11.15	12.58
	8H	14.00	14.40	15.08	15.48	16.93	9.76	10.16	10.84	11.24	12.69
	12H	14.10	14.46	15.19	15.55	17.00	9.83	10.19	10.92	11.28	12.73
8H	4H	13.27	13.67	14.35	14.75	16.20	9.50	9.90	10.58	10.97	12.42
	6H	13.84	14.17	14.94	15.29	16.73	10.02	10.34	11.12	11.46	12.91
	8H	14.06	14.35	15.17	15.45	16.92	10.21	10.50	11.31	11.60	13.06
	12H	14.20	14.45	15.31	15.55	17.05	10.32	10.58	11.43	11.67	13.18
12H	4H	13.22	13.58	14.32	14.67	16.13	9.50	9.86	10.60	10.95	12.40
	6H	13.82	14.11	14.92	15.21	16.67	10.07	10.35	11.17	11.45	12.92
	8H	14.04	14.29	15.15	15.39	16.89	10.27	10.53	11.38	11.62	13.13