

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P909668

Luminaire Tested: DFN2DIP-SQ4F0-140D120US840-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P909668
REPORT IS A COMBINATION OF REPORTS P900181 AND P896915
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ4F0-140D120US840-FLLFLL
Description: 4 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 24721.5 lumens
Efficiency: N/A
Efficacy: 105.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.92' x L: 3.92' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 233.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P909668

CATALOG NUMBER: DFN2DIP-SQ4F0-140D120US840-FLLFLL

Luminous Intensity Polar Plot

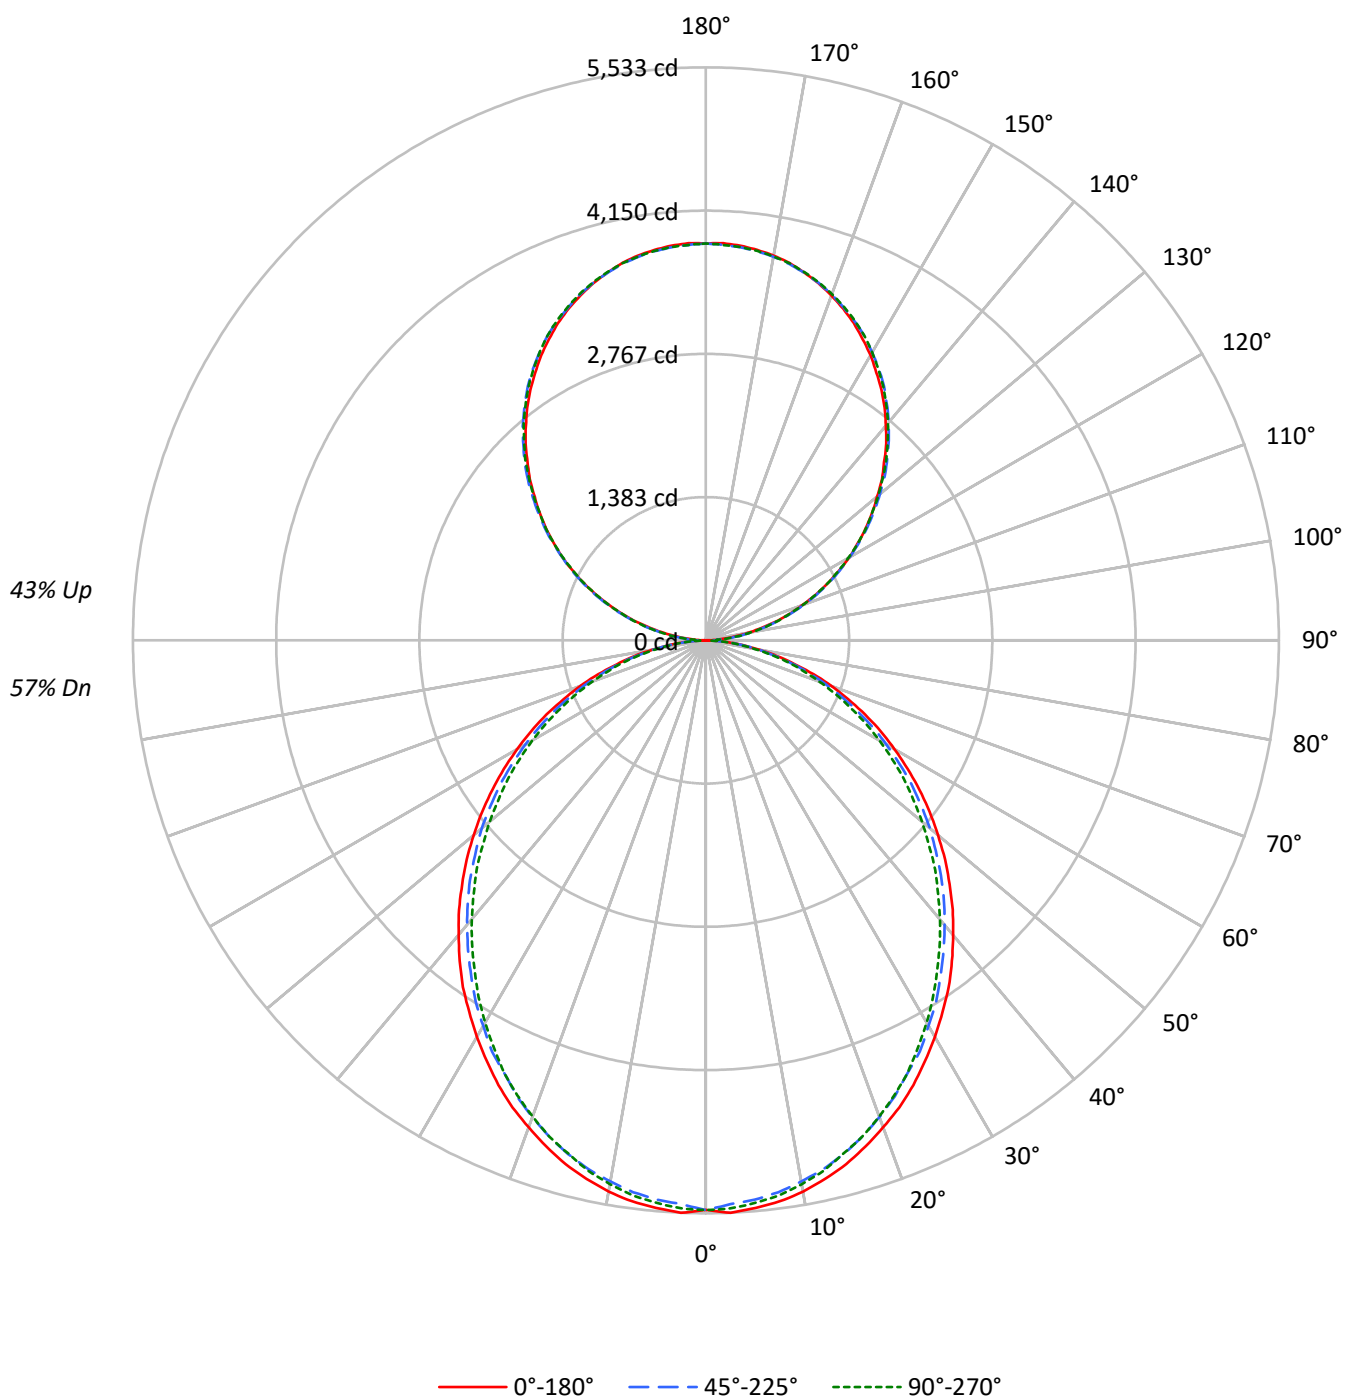

TEST NUMBER: P909668

CATALOG NUMBER: DFN2DIP-SQ4F0-140D120US840-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62
1	99	95	91	87	92	88	85	82	76	74	72	65	63	62	55	54	53
2	90	83	77	71	84	77	72	67	67	63	59	57	54	52	48	46	44
3	82	73	65	60	76	68	62	56	59	54	50	51	47	44	43	40	38
4	75	65	57	50	70	60	53	48	53	47	43	45	41	37	38	35	33
5	69	58	49	43	64	54	47	41	47	41	37	41	36	32	35	31	28
6	64	52	43	38	59	48	41	36	42	36	32	37	32	28	31	28	25
7	59	47	39	33	55	44	37	31	38	33	28	33	29	25	29	25	22
8	55	42	35	29	51	40	33	28	35	29	25	31	26	23	26	23	20
9	51	39	31	26	48	37	30	25	32	27	23	28	24	20	24	21	18
10	48	36	28	23	45	34	27	22	30	24	20	26	22	18	23	19	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3860	3860	3860
5°	3866	3807	3833
10°	3835	3757	3782
15°	3778	3695	3702
20°	3702	3610	3620
25°	3626	3508	3525
30°	3531	3413	3404
35°	3441	3301	3276
40°	3330	3188	3155
45°	3220	3075	3030
50°	3099	2956	2886
55°	2972	2819	2754
60°	2829	2655	2602
65°	2673	2487	2423
70°	2475	2280	2231
75°	2199	2034	2056
80°	1868	1721	1718
85°	1350	1177	1154

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3220 cd/sqm

TEST NUMBER: P909668

CATALOG NUMBER: DFN2DIP-SQ4F0-140D120US840-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	517.8	2.1
10°-20°	1456.8	5.9
20°-30°	2141.0	8.7
30°-40°	2486.6	10.1
40°-50°	2483.5	10.0
50°-60°	2165.5	8.8
60°-70°	1600.8	6.5
70°-80°	905.7	3.7
80°-90°	249.9	1.0
90°-100°	237.2	1.0
100°-110°	753.5	3.0
110°-120°	1289.5	5.2
120°-130°	1696.0	6.9
130°-140°	1903.6	7.7
140°-150°	1866.7	7.6
150°-160°	1565.9	6.3
160°-170°	1038.5	4.2
170°-180°	363.0	1.5
0°-30°	4115.6	16.6
0°-40°	6602.1	26.7
0°-60°	11251.2	45.5
0°-90°	14007.6	56.7
90°-120°	2280.2	9.2
90°-150°	7746.5	31.3
90°-180°	10714.0	43.3
0°-180°	24721.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5501	5501	5501	5501	5501	
5°	5501	5480	5422	5464	5454	522
15°	5237	5206	5136	5158	5131	1475
25°	4740	4698	4608	4618	4608	2181
35°	4089	4036	3952	3920	3893	2554
45°	3328	3290	3211	3153	3132	2568
55°	2518	2486	2423	2359	2333	2251
65°	1698	1666	1614	1566	1539	1679
75°	888	878	851	820	831	948
85°	217	212	206	190	185	242
90°	3	42	113	106	110	24
95°	169	201	207	207	201	188
105°	696	705	712	718	718	734
115°	1294	1313	1307	1303	1294	1280
125°	1882	1911	1902	1892	1888	1682
135°	2434	2470	2477	2474	2465	1882
145°	2956	2979	2997	3001	2988	1847
155°	3380	3389	3399	3416	3405	1556
165°	3677	3673	3673	3696	3680	1037
175°	3826	3816	3810	3832	3813	363
180°	3832	3832	3832	3832	3832	

TEST NUMBER: P909668

CATALOG NUMBER: DFN2DIP-SQ4F0-140D120US840-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5501.2	5501.2	5501.2	5501.2	5501.2
2.5°	5533.2	5506.8	5448.4	5501.2	5491.1
5°	5501.2	5480.4	5422.1	5464.2	5454.1
7.5°	5464.2	5432.8	5374.4	5417.0	5406.3
10°	5406.3	5369.4	5305.9	5348.0	5332.3
12.5°	5326.6	5295.2	5231.8	5258.2	5247.6
15°	5236.9	5205.5	5136.4	5157.8	5131.3
17.5°	5125.8	5094.4	5025.3	5051.7	5025.3
20°	5004.0	4972.6	4898.5	4914.2	4893.4
22.5°	4882.7	4835.0	4766.0	4766.0	4755.4
25°	4739.6	4697.5	4607.7	4617.8	4607.7
27.5°	4580.8	4543.8	4475.3	4459.6	4433.2
30°	4422.5	4379.9	4300.7	4285.1	4263.7
32.5°	4253.0	4221.6	4136.8	4104.9	4083.5
35°	4089.1	4036.4	3951.6	3919.7	3893.2
37.5°	3903.9	3856.3	3771.4	3734.5	3708.0
40°	3713.7	3671.1	3586.2	3539.2	3517.8
42.5°	3528.5	3485.9	3401.6	3348.3	3316.9
45°	3327.5	3290.5	3210.9	3153.0	3131.7
47.5°	3131.7	3094.6	3009.9	2951.5	2920.1
50°	2925.2	2898.8	2824.7	2750.6	2724.2
52.5°	2724.2	2687.2	2618.7	2560.3	2523.4
55°	2518.3	2486.3	2422.9	2359.4	2333.1
57.5°	2311.7	2285.3	2216.4	2152.9	2131.5
60°	2105.2	2084.5	2010.3	1952.0	1936.2
62.5°	1904.3	1867.2	1814.4	1761.7	1740.4
65°	1698.3	1666.3	1613.6	1565.8	1539.4
67.5°	1486.7	1459.8	1412.6	1375.5	1354.2
70°	1290.8	1269.5	1221.8	1184.8	1164.0
72.5°	1089.9	1068.5	1042.2	1005.2	989.5
75°	888.5	878.4	851.4	820.0	830.6
77.5°	708.8	687.5	676.8	661.2	645.4
80°	529.3	523.6	513.0	497.3	486.6
82.5°	359.7	359.7	354.7	333.4	333.4
85°	216.6	211.6	206.5	190.3	185.2
87.5°	95.4	84.7	74.1	58.4	52.7
90°	3.4	41.6	113.2	106.3	109.8
92.5°	71.6	97.0	100.5	104.0	104.0
95°	168.6	201.1	206.8	206.8	201.1
97.5°	280.7	310.8	323.6	323.6	323.6
100°	410.2	436.8	446.0	446.0	442.5
102.5°	546.5	566.1	578.9	582.4	578.9
105°	695.6	704.8	711.8	717.5	717.5
107.5°	843.4	857.4	857.4	859.6	843.4
110°	986.7	1005.2	1005.2	1005.2	996.0



TEST NUMBER: P909668

CATALOG NUMBER: DFN2DIP-SQ4F0-140D120US840-FLLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1141.6	1161.2	1157.7	1148.5	1141.6
115°	1294.0	1312.6	1306.8	1303.3	1294.0
117.5°	1445.4	1470.9	1454.7	1445.4	1436.2
120°	1598.0	1623.4	1598.0	1598.0	1587.6
122.5°	1736.7	1769.0	1752.8	1743.5	1736.7
125°	1882.2	1911.1	1901.9	1891.5	1887.9
127.5°	2024.4	2060.1	2047.4	2033.6	2024.4
130°	2157.2	2198.8	2193.0	2186.1	2173.3
132.5°	2306.2	2338.6	2340.9	2324.7	2315.5
135°	2434.5	2470.3	2477.3	2473.8	2464.6
137.5°	2577.8	2606.7	2612.4	2610.1	2596.3
140°	2703.7	2732.6	2748.8	2748.8	2736.0
142.5°	2833.2	2862.1	2871.2	2874.7	2862.1
145°	2955.6	2978.7	2997.2	3000.7	2988.0
147.5°	3065.3	3094.2	3108.2	3113.9	3101.2
150°	3178.7	3198.2	3211.0	3221.4	3211.0
152.5°	3279.1	3298.7	3315.0	3327.7	3315.0
155°	3379.6	3388.9	3399.3	3415.5	3405.1
157.5°	3466.4	3473.2	3479.0	3502.1	3486.0
160°	3543.7	3550.7	3554.1	3573.8	3559.9
162.5°	3615.3	3615.3	3618.9	3640.8	3624.6
165°	3676.6	3673.2	3673.2	3696.2	3680.1
167.5°	3732.1	3721.7	3721.7	3744.8	3728.6
170°	3773.7	3764.4	3760.9	3784.1	3764.4
172.5°	3802.5	3793.3	3789.8	3812.9	3793.3
175°	3825.7	3816.4	3809.5	3832.5	3812.9
177.5°	3838.4	3829.1	3822.1	3841.8	3822.1
180°	3832.5	3832.5	3832.5	3832.5	3832.5

TEST NUMBER: P909668

CATALOG NUMBER: DFN2DIP-SQ4F0-140D120US840-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.57	13.49	13.47	14.41	15.58	12.13	13.05	13.02	13.97	15.14
	3H	14.24	15.07	15.15	16.00	17.19	13.75	14.58	14.66	15.51	16.70
	4H	14.83	15.62	15.76	16.55	17.76	14.34	15.12	15.26	16.05	17.26
	6H	15.24	15.96	16.18	16.90	18.12	14.74	15.46	15.67	16.40	17.62
	8H	15.35	16.04	16.29	16.99	18.21	14.85	15.53	15.79	16.49	17.71
	12H	15.40	16.06	16.35	17.00	18.25	14.89	15.55	15.84	16.50	17.74
4H	2H	13.04	13.82	13.97	14.76	15.96	12.68	13.47	13.61	14.40	15.61
	3H	14.92	15.57	15.86	16.53	17.75	14.51	15.16	15.45	16.13	17.35
	4H	15.64	16.23	16.59	17.19	18.44	15.21	15.81	16.16	16.77	18.01
	6H	16.16	16.67	17.12	17.66	18.90	15.73	16.24	16.69	17.22	18.47
	8H	16.31	16.79	17.28	17.77	19.03	15.87	16.36	16.84	17.33	18.59
	12H	16.39	16.83	17.37	17.82	19.08	15.94	16.38	16.93	17.37	18.63
8H	4H	15.84	16.32	16.80	17.29	18.55	15.46	15.94	16.43	16.92	18.18
	6H	16.48	16.88	17.47	17.89	19.15	16.09	16.49	17.08	17.51	18.77
	8H	16.70	17.05	17.70	18.06	19.33	16.31	16.66	17.31	17.66	18.94
	12H	16.84	17.15	17.84	18.15	19.47	16.43	16.74	17.43	17.74	19.06
12H	4H	15.83	16.26	16.81	17.25	18.52	15.46	15.89	16.44	16.88	18.15
	6H	16.51	16.86	17.51	17.86	19.14	16.14	16.49	17.14	17.49	18.77
	8H	16.76	17.07	17.76	18.06	19.39	16.38	16.69	17.38	17.68	19.01